

# Product Environmental Footprint Category Rules Guidance

Version 6.3 – May 2018

## Preface

This document (henceforward, the PEFCR Guidance) provides instructions on how to develop a Product Environmental Footprint Category Rules (PEFCR). The content of this PEFCR Guidance will be periodically revised by European Commission services. The PEFCRs developed during the Environmental Footprint pilot phase (2013-2018) shall be fully in line with this version of the guidance. Any derogation from this general rule is only possible with the agreement of the Commission.

Please cite this document as European Commission, *PEFCR Guidance document*, - Guidance for the development of Product Environmental Footprint Category Rules (PEFCRs), version 6.3, December 2017.

For any technical question related to the content of this guidance, please refer to the functional mailbox [env-environmental-footprint@ec.europa.eu](mailto:env-environmental-footprint@ec.europa.eu)

### Disclaimer

The European Commission accepts no responsibility whatsoever nature to third parties to whom this Guidance, or any part thereof, is made known. Any such party relies on the Guidance at their own risk.

## 25 **Table of content**

26	<b>PREFACE</b>	<b>1</b>
27	<b>TABLE OF CONTENT</b>	<b>2</b>
28	<b>1 LIST OF TABLES</b>	<b>10</b>
29	<b>2 LIST OF FIGURES</b>	<b>12</b>
30	<b>3 LIST OF ACRONYMS</b>	<b>13</b>
31	<b>4 TERMS AND DEFINITIONS</b>	<b>15</b>
32	<b>5 RATIONALE</b>	<b>22</b>
33	<b>5.1 TERMINOLOGY: SHALL, SHOULD AND MAY</b>	<b>22</b>
34	<b>5.2 DEFINITION AND PURPOSE OF A PEFCR</b>	<b>22</b>
35	<b>5.3 RELATIONSHIP TO OTHER METHODS AND STANDARDS</b>	<b>23</b>
36	<b>5.4 INTENDED AUDIENCE</b>	<b>24</b>
37	<b>6 GOVERNANCE AND PROCEDURES</b>	<b>25</b>
38	<b>6.1 ORGANISATIONAL STRUCTURE OF THE EF PILOT PHASE</b>	<b>25</b>
39	6.1.1 EF PILOT STEERING COMMITTEE (SC)	25
40	6.1.2 THE EF TECHNICAL ADVISORY BOARD (TAB)	26
41	6.1.3 THE TECHNICAL SECRETARIAT (TS)	26
42	6.1.4 THE EF TECHNICAL HELPDESK	27
43	6.1.5 THE EF CONSULTATION FORUM	27
44	<b>6.2 STAKEHOLDERS INVOLVED IN PEFCR DEVELOPMENT</b>	<b>27</b>
45	<b>6.3 PEFCR SCOPE DEFINITION</b>	<b>28</b>
46	<b>6.4 MODULARITY IN PEFCRS</b>	<b>28</b>
47	<b>6.5 STEPS TO CARRY OUT BEFORE THE CREATION OF A NEW PEFCR</b>	<b>29</b>
48	<b>6.6 THE PROCESS OF DEVELOPING A PEFCR</b>	<b>30</b>
49	6.6.1 TIMING OF THE PROCESS	30
50	6.6.2 THE CONSULTATION PROCESS	31
51	6.6.3 REPRESENTATIVENESS OF A PEFCR	31
52	6.6.4 STRUCTURE OF THE PEFCR	32
53	6.6.5 PROCEDURE FOR THE DEVELOPMENT OF A PEFCR	32
54	6.6.6 PRODUCT SCOPE AND CLASSIFICATION	32
55	6.6.7 THE PEF SCREENING	35
56	6.6.8 THE SCREENING REPORT	36
57	6.6.9 THE DRAFT PEFCR	37

58	6.6.10	DOCUMENTS TO BE SUBMITTED TO THE FIRST CONSULTATION	37
59	6.6.11	THE PEFCR SUPPORTING STUDIES	37
60	6.6.11.1	Identification of the most relevant impact categories	38
61	6.6.12	DISCLOSURE AND COMMUNICATION	39
62	6.6.13	VERIFICATION OF THE PEFCR SUPPORTING STUDIES	39
63	6.6.14	COMPETENCES OF THE VERIFIER	41
64	6.6.15	TIME VALIDITY OF THE PEFCR	41
65	6.6.16	THE PEFCR REVIEW	41
66	6.6.16.1	Reviewer qualifications	41
67	6.6.16.2	Procedure for review	41
68	6.6.16.3	Review criteria	42
69	6.6.16.4	Review report	42
70	6.6.16.5	Addressing reviewers' comments	42
71	6.6.17	DOCUMENTS TO BE DRAFTED BEFORE THE FINAL CONSULTATION	43
72	6.6.18	DOCUMENTS TO BE DRAFTED BEFORE FINAL APPROVAL BY THE SC	43
73	<b>6.7</b>	<b>CONDITIONS TO CLOSE A PILOT</b>	<b>43</b>
74	<b>7</b>	<b><u>TECHNICAL SPECIFICATIONS</u></b>	<b>44</b>
75	<b>7.1</b>	<b>FUNCTIONAL UNIT AND REFERENCE FLOW</b>	<b>44</b>
76	<b>7.2</b>	<b>HOW TO DEFINE THE REPRESENTATIVE PRODUCT(S)</b>	<b>45</b>
77	<b>7.3</b>	<b>LIST OF EF IMPACT CATEGORIES, NORMALISATION FACTORS AND WEIGHTING FACTORS</b>	<b>47</b>
78	<b>7.4</b>	<b>IDENTIFICATION OF MOST RELEVANT IMPACT CATEGORIES, LIFE CYCLE STAGES, PROCESSES AND ELEMENTARY</b>	
79		<b>FLows</b>	<b>50</b>
80	7.4.1	PROCEDURE TO IDENTIFY THE MOST RELEVANT IMPACT CATEGORIES	50
81	7.4.2	PROCEDURE TO IDENTIFY THE MOST RELEVANT LIFE CYCLE STAGES	50
82	7.4.3	PROCEDURE TO IDENTIFY THE MOST RELEVANT PROCESSES	51
83	7.4.4	PROCEDURE TO IDENTIFY THE MOST RELEVANT DIRECT ELEMENTARY FLOWS	52
84	7.4.5	DEALING WITH NEGATIVE NUMBERS	52
85	7.4.6	SPECIFIC INSTRUCTIONS ABOUT AGGREGATING ELEMENTARY FLOWS	52
86	7.4.7	CONCLUSIONS	53
87	7.4.8	EXAMPLE	53
88	<b>7.5</b>	<b>SAMPLING PROCEDURE</b>	<b>56</b>
89	7.5.1	HOW TO DEFINE HOMOGENOUS SUB-POPULATIONS (STRATIFICATION)	57
90	7.5.2	HOW TO DEFINE SUB-SAMPLE SIZE AT SUB-POPULATION LEVEL	59
91	7.5.2.1	First approach	59
92	7.5.2.2	Second approach	59
93	7.5.3	HOW TO DEFINE THE SAMPLE FOR THE POPULATION	60
94	7.5.4	WHAT TO DO IN CASE ROUNDING IS NECESSARY	60
95	7.5.5	REQUIREMENTS FOR THE PEFCR	60
96	<b>7.6</b>	<b>CUT-OFF</b>	<b>61</b>
97	<b>7.7</b>	<b>HANDLING MULTI-FUNCTIONAL PROCESSES</b>	<b>61</b>
98	<b>7.8</b>	<b>EXTENDED PRODUCT LIFETIME</b>	<b>64</b>
99	7.8.1	REUSE RATES	64

100	7.8.2	HOW TO APPLY 'REUSE RATE' (SITUATION 1)	64
101	<b>7.9</b>	<b>CLIMATE CHANGE MODELLING</b>	<b>65</b>
102	7.9.1	SUB-CATEGORY 1: CLIMATE CHANGE – FOSSIL	66
103	7.9.2	SUB-CATEGORY 2: CLIMATE CHANGE – BIOGENIC	66
104	7.9.3	SUB-CATEGORY 3: CLIMATE CHANGE – LAND USE AND LAND TRANSFORMATION	67
105	7.9.4	CHARACTERISATION FACTORS OF METHANE, CARBON DIOXIDE AND CARBON MONOXIDE	69
106	<b>7.10</b>	<b>AGRICULTURAL MODELLING</b>	<b>71</b>
107	7.10.1	HANDLING MULTI-FUNCTIONAL PROCESSES	71
108	7.10.2	CROP TYPE SPECIFIC AND COUNTRY-REGION-OR-CLIMATE SPECIFIC DATA	71
109	7.10.3	AVERAGING DATA	71
110	7.10.4	PESTICIDES	72
111	7.10.5	FERTILISERS	72
112	7.10.6	HEAVY METAL EMISSIONS	75
113	7.10.7	RICE CULTIVATION	75
114	7.10.8	PEAT SOILS	75
115	7.10.9	OTHER ACTIVITIES	75
116	<b>7.11</b>	<b>CATTLE, SHEEP, GOAT, AND PORK MODELLING</b>	<b>76</b>
117	7.11.1	ALLOCATION WITHIN THE FARM MODULE	76
118	7.11.2	ALLOCATION WITHIN THE FARM MODULE FOR CATTLE	76
119	7.11.3	ALLOCATION WITHIN THE FARM MODULE FOR THE SHEEP AND GOAT	78
120	7.11.4	ALLOCATION WITHIN THE FARM MODULE FOR PIG	82
121	7.11.5	ALLOCATION WITHIN THE SLAUGHTERHOUSE	82
122	7.11.6	ALLOCATION WITHIN THE SLAUGHTERHOUSE FOR CATTLE	83
123	7.11.7	ALLOCATION WITHIN THE SLAUGHTERHOUSE FOR PIGS	84
124	7.11.8	ALLOCATION WITHIN THE SLAUGHTERHOUSE FOR SHEEP AND GOAT	85
125	<b>7.12</b>	<b>BIODIVERSITY</b>	<b>86</b>
126	<b>7.13</b>	<b>ELECTRICITY MODELLING</b>	<b>87</b>
127	7.13.1	GENERAL GUIDELINES	87
128	7.13.2	SET OF MINIMAL CRITERIA TO ENSURE CONTRACTUAL INSTRUMENTS FROM SUPPLIERS	87
129	7.13.3	HOW TO MODEL 'COUNTRY-SPECIFIC RESIDUAL GRID MIX, CONSUMPTION MIX'	90
130	7.13.4	A SINGLE LOCATION WITH MULTIPLE PRODUCTS AND MORE THAN ONE ELECTRICITY MIX	90
131	7.13.5	FOR MULTIPLE LOCATIONS PRODUCING ONE PRODUCT	91
132	7.13.6	ELECTRICITY USE AT THE USE STAGE	91
133	7.13.7	HOW TO DEAL WITH ON-SITE ELECTRICITY GENERATION?	91
134	7.13.8	ELECTRICITY MODELLING FOR BENCHMARK CALCULATIONS	92
135	<b>7.14</b>	<b>MODELLING TRANSPORT</b>	<b>92</b>
136	7.14.1	HOW TO ALLOCATE THE TRANSPORT BURDENS	93
137	7.14.1.1	Truck transport	93
138	7.14.1.2	Van transport	94
139	7.14.1.3	Consumer transport	94
140	7.14.2	FROM SUPPLIER TO FACTORY	94
141	7.14.3	FROM FACTORY TO FINAL CLIENT	95
142	7.14.4	FROM EOL COLLECTION TO EOL TREATMENT	97
143	7.14.5	TRANSPORT PROCESSES FOR COOLED AND FROZEN PRODUCT	97
144	<b>7.15</b>	<b>MODELLING INFRASTRUCTURE AND EQUIPMENT</b>	<b>98</b>

145	7.15.1	DISTRIBUTION CENTRE (DC)	98
146	7.15.2	RETAIL SPACE	99
147	7.15.3	FRIDGE	100
148	7.15.4	DISHWASHER	100
149	7.15.5	SMALL EQUIPMENT TO BE CONSIDERED	100
150	<b>7.16</b>	<b>PACKAGING MODELLING</b>	<b>101</b>
151	7.16.1	PACKAGING DATASETS	101
152	7.16.2	PACKAGING REUSE RATES	101
153	7.16.2.1	Average reuse rates for company owned pools	103
154	7.16.2.2	Average reuse rates for third party operated pools	103
155	<b>7.17</b>	<b>USE STAGE MODELLING</b>	<b>104</b>
156	7.17.1	DEFINITION OF THE USE STAGE	104
157	7.17.2	MAIN FUNCTION APPROACH OR DELTA APPROACH	106
158	7.17.3	MODELLING THE USE STAGE	107
159	7.17.4	EXAMPLE: PASTA	108
160	7.17.5	EXAMPLE: ENERGY USING PRODUCTS	109
161	<b>7.18</b>	<b>END-OF-LIFE MODELLING</b>	<b>109</b>
162	7.18.1	THE CIRCULAR FOOTPRINT FORMULA	110
163	7.18.2	THE PARAMETERS OF THE CIRCULAR FOOTPRINT FORMULA (CFF AND CFF-M)	111
164	7.18.3	THE A FACTOR	112
165	7.18.4	THE B FACTOR	112
166	7.18.5	THE POINT OF SUBSTITUTION	113
167	7.18.6	THE QUALITY RATIOS: $Q_{S_{IN}}/Q_P$ AND $Q_{S_{OUT}}/Q_P$	114
168	7.18.7	RECYCLED CONTENT ( $R_1$ )	115
169	7.18.7.1	Relation with the Data Needs Matrix (DNM)	115
170	7.18.7.2	Guidelines when using supply-chain specific $R_1$ values	116
171	7.18.7.3	Guidelines when using default $R_1$ values	116
172	7.18.7.4	Guidelines on how to deal with pre-consumer scrap	116
173	7.18.8	RECYCLING OUTPUT RATE ( $R_2$ )	118
174	7.18.9	$E_{RECYCLED}$ AND $E_{RECYCLINGEOL}$	120
175	7.18.10	THE $E^*V$	120
176	7.18.11	HOW TO APPLY THE FORMULA TO FINAL PRODUCTS (CRADLE-TO-GRAVE STUDIES)	120
177	7.18.12	HOW TO APPLY THE FORMULA TO INTERMEDIATE PRODUCTS (CRADLE-TO-GATE STUDIES)	121
178	7.18.13	HOW TO APPLY THE FORMULA TO CONSTRUCTION PRODUCTS	121
179	7.18.14	SUMMARY TABLE ON HOW TO APPLY THE CIRCULAR FOOTPRINT FORMULA	121
180	7.18.15	HOW TO DEAL WITH SPECIFIC ASPECTS	122
181	7.18.16	BIOGENIC CARBON	122
182	7.18.17	RECOVERY BOTTOM ASHES/SLAG FROM INCINERATION	122
183	7.18.18	LANDFILL AND INCINERATION WITH ENERGY RECOVERY	122
184	7.18.19	MUNICIPAL SOLID WASTE	123
185	7.18.20	COMPOST AND ANAEROBIC DIGESTION/SEWAGE TREATMENT	123
186	7.18.21	WASTE MATERIALS USED AS A FUEL	123
187	7.18.22	MODELLING COMPLEX PRODUCTS	123
188	7.18.23	REUSE AND REFURBISHMENT	123
189	7.18.24	PACKAGING	123

190	<b>7.19 DATA REQUIREMENTS AND QUALITY REQUIREMENTS</b>	<b>128</b>
191	7.19.1 THE MATERIALITY APPROACH	128
192	7.19.2 DQR FORMULA	128
193	7.19.2.1 DQR tables for processes with company-specific data:	130
194	7.19.2.2 DQR tables for processes for which secondary datasets are used	131
195	7.19.3 LIST OF MANDATORY COMPANY-SPECIFIC DATA	132
196	7.19.4 DATA NEEDS MATRIX (DNM)	133
197	7.19.4.1 Rules to be followed when developing a PEFCR	133
198	7.19.4.2 Rules for the applicant	134
199	7.19.4.3 DNM, situation 1	136
200	7.19.4.4 DNM, situation 2	136
201	7.19.4.5 DNM, situation 3	137
202	7.19.5 WHICH DATASETS TO USE?	138
203	7.19.6 THE DQR OF THE STUDY	139
204	<b>7.20 BENCHMARK</b>	<b>139</b>
205	<b>7.21 CLASSES OF PERFORMANCE</b>	<b>139</b>
206	<b><u>8 VERIFICATION AND VALIDATION OF EF STUDIES, REPORTS, AND COMMUNICATION VEHICLES</u></b>	
207	<b><u>140</u></b>	
208	<b>8.1 DEFINING THE SCOPE OF THE VERIFICATION</b>	<b>140</b>
209	<b>8.2 VERIFICATION PROCEDURE</b>	<b>141</b>
210	<b>8.3 VERIFIER(S)</b>	<b>141</b>
211	8.3.1 MINIMUM REQUIREMENTS FOR VERIFIER(S)	142
212	8.3.2 ROLE OF THE LEAD VERIFIER IN THE VERIFICATION TEAM	143
213	<b>8.4 VERIFICATION/VALIDATION REQUIREMENTS</b>	<b>144</b>
214	8.4.1 REQUIREMENTS FOR THE VERIFICATION/VALIDATION WHEN A PEFCR IS AVAILABLE	144
215	8.4.1.1 Minimum requirements for the verification and validation of the EF study	145
216	8.4.1.2 Additional requirements for the validation of the EF study	146
217	8.4.2 REQUIREMENTS FOR THE VERIFICATION AND VALIDATION WHERE NO PEFCR IS AVAILABLE	146
218	8.4.3 VERIFICATION AND VALIDATION TECHNIQUES	146
219	8.4.4 DATA CONFIDENTIALITY	146
220	<b>8.5 OUTPUTS OF THE VERIFICATION/VALIDATION PROCESS</b>	<b>147</b>
221	8.5.1 CONTENT OF THE VERIFICATION AND VALIDATION REPORT	147
222	8.5.2 CONTENT OF THE VALIDATION STATEMENT	148
223	8.5.3 VALIDITY OF THE VERIFICATION AND VALIDATION REPORT AND THE VALIDATION STATEMENT	148
224	<b><u>9 REFERENCES</u></b>	<b>150</b>
225	<b><u>ANNEX A – LIST OF EF IMPACT CATEGORIES, NORMALISATION AND WEIGHTING FACTORS</u></b>	<b>154</b>
226	<b><u>ANNEX B – PEFCR TEMPLATE</u></b>	<b>159</b>
227	<b>TABLE OF CONTENTS</b>	<b>160</b>

228	<b>ACRONYMS</b>	<b>160</b>
229	<b>DEFINITIONS</b>	<b>160</b>
230	<b>B.1 INTRODUCTION</b>	<b>160</b>
231	<b>B.2 GENERAL INFORMATION ABOUT THE PEFCR</b>	<b>161</b>
232	B.2.1 TECHNICAL SECRETARIAT	161
233	B.2.2 CONSULTATIONS AND STAKEHOLDERS	161
234	B.2.3 REVIEW PANEL AND REVIEW REQUIREMENTS OF THE PEFCR	161
235	B.2.4 REVIEW STATEMENT	162
236	B.2.5 GEOGRAPHIC VALIDITY	163
237	B.2.6 LANGUAGE	163
238	B.2.7 CONFORMANCE TO OTHER DOCUMENTS	163
239	<b>B.3 PEFCR SCOPE</b>	<b>163</b>
240	B.3.1 PRODUCT CLASSIFICATION	163
241	B.3.2 REPRESENTATIVE PRODUCT(S)	163
242	B.3.3 FUNCTIONAL UNIT AND REFERENCE FLOW	164
243	B.3.4 SYSTEM BOUNDARY	164
244	B.3.5 EF IMPACT ASSESSMENT	165
245	B.3.6 LIMITATIONS	167
246	<b>B.4 MOST RELEVANT IMPACT CATEGORIES, LIFE CYCLE STAGES AND PROCESSES</b>	<b>167</b>
247	<b>B.5 LIFE CYCLE INVENTORY</b>	<b>168</b>
248	B.5.1 LIST OF MANDATORY COMPANY-SPECIFIC DATA	168
249	B.5.2 LIST OF PROCESSES EXPECTED TO BE RUN BY THE COMPANY	170
250	B.5.3 DATA GAPS	171
251	B.5.4 DATA QUALITY REQUIREMENTS	171
252	B.5.4.1 COMPANY-SPECIFIC DATASETS	172
253	B.5.5 DATA NEEDS MATRIX (DNM)	174
254	B.5.5.1 PROCESSES IN SITUATION 1	175
255	B.5.5.2 PROCESSES IN SITUATION 2	176
256	B.5.5.3 PROCESSES IN SITUATION 3	177
257	B.5.6 WHICH DATASETS TO USE?	178
258	B.5.7 HOW TO CALCULATE THE AVERAGE DQR OF THE STUDY	178
259	B.5.8 ALLOCATION RULES	179
260	B.5.9 ELECTRICITY MODELLING	179
261	B.5.10 CLIMATE CHANGE MODELLING	182
262	B.5.11 MODELLING OF WASTES AND RECYCLED CONTENT	185
263	<b>B.6 LIFE CYCLE STAGES</b>	<b>188</b>
264	B.6.1 RAW MATERIAL ACQUISITION AND PRE-PROCESSING	188
265	B.6.2 AGRICULTURAL MODELLING (TO BE INCLUDED ONLY IF APPLICABLE)	191
266	B.6.3 MANUFACTURING	194
267	B.6.4 DISTRIBUTION STAGE	195
268	B.6.5 USE STAGE [TO BE INCLUDED IF APPLICABLE]	196
269	B.6.6 END OF LIFE [TO BE INCLUDED IF APPLICABLE]	197
270	<b>B.7 PEF RESULTS</b>	<b>198</b>
271	B.7.1 BENCHMARK VALUES	198
272	B.7.2 PEF PROFILE	200

273	B.7.3 ADDITIONAL TECHNICAL INFORMATION	200
274	B.7.4 ADDITIONAL ENVIRONMENTAL INFORMATION	201
275	<b>B.8 VERIFICATION</b>	<b>201</b>
276	<b>B.9 REFERENCES</b>	<b>202</b>
277	<b>ANNEX B.1 – LIST OF EF NORMALISATION AND WEIGHTING FACTORS</b>	<b>203</b>
278	<b>ANNEX B.2 - CHECK-LIST FOR THE PEF STUDY</b>	<b>205</b>
279	<b>ANNEX B.3 - CRITICAL REVIEW REPORT OF THE PEFCR</b>	<b>207</b>
280	<b>ANNEX B.4 - OTHER ANNEXES</b>	<b>207</b>
281	<b><u>ANNEX C – LIST OF DEFAULT VALUES FOR A, R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub> AND QS/QP</u></b>	<b>208</b>
282	<b><u>ANNEX D – BACKGROUND INFORMATION TO CALCULATE R<sub>2</sub> FOR PACKAGING MATERIALS</u></b>	<b>209</b>
283	<b><u>ANNEX E – PEFCR SUPPORTING STUDY TEMPLATE</u></b>	<b>211</b>
284	<b>GENERAL GUIDELINES AND INSTRUCTIONS</b>	<b>211</b>
285	<b>E.1 SUMMARY</b>	<b>212</b>
286	<b>E.2 GENERAL</b>	<b>212</b>
287	<b>E.3 GOAL OF THE STUDY</b>	<b>213</b>
288	<b>E.4 SCOPE OF THE STUDY</b>	<b>213</b>
289	E.4.1 FUNCTIONAL/DECLARED UNIT AND REFERENCE FLOW	213
290	E.4.2 SYSTEM BOUNDARIES	213
291	E.4.3 SUPPLEMENTARY ANALYSIS	213
292	<b>E.5 LIFE CYCLE INVENTORY ANALYSIS</b>	<b>214</b>
293	E.5.1 DATA COLLECTION AND QUALITY ASSESSMENT (CONFIDENTIAL IF RELEVANT)	214
294	E.5.2 DATA GAPS	214
295	E.5.3 SUPPLEMENTARY ANALYSIS	214
296	<b>E.6 IMPACT ASSESSMENT RESULTS (CONFIDENTIAL IF RELEVANT)</b>	<b>215</b>
297	E.6.1 PEF RESULTS	215
298	E.6.2 SUPPLEMENTARY ANALYSIS	215
299	<b>E.7 INTERPRETING PEF RESULTS</b>	<b>215</b>
300	E.7.1 PEF RESULTS	215
301	E.7.2 COMPARISON TO THE BENCHMARK	215
302	E.7.3 PERFORMANCE CLASS	216
303	<b>ANNEX I</b>	<b>216</b>
304	<b>ANNEX II: CONFIDENTIAL</b>	<b>216</b>
305	<b><u>ANNEX F – DEFAULT DATA FOR MODELLING THE USE STAGE</u></b>	<b>217</b>
306	<b><u>ANNEX G – DEFAULT LOSS RATES PER TYPE OF PRODUCT</u></b>	<b>220</b>
307	<b><u>ANNEX H – WHEN IS CARBON STORED &gt; 100 YEARS?</u></b>	<b>224</b>
308	<b><u>ANNEX I – EF-COMPLIANT DATASET</u></b>	<b>226</b>



309	<b>I.1 LIST OF ALL TECHNICAL REQUIREMENTS TO BE FULFILLED BY DATASETS TO BE RECOGNISED AS EF COMPLIANT</b>	<b>226</b>
310	I.1.1 DOCUMENTATION	226
311	I.1.2 NOMENCLATURE	227
312	I.1.3 REVIEW	227
313	I.1.4 METHODOLOGICAL REQUIREMENTS	228
314	<b>I.2 AGGREGATION</b>	<b>229</b>
315	<b>I.3 DATA QUALITY CRITERIA AND SCORES</b>	<b>230</b>
316		

# 1 List of tables

318	Table 1. Four aspects of the FU with additional requirements for food and non-food PEFCRs.....	44
319	Table 2. List of recommended models at midpoint, together with their indicator, unit and source. In	
320	red text: the differences compared to the PEF guide (2013) .....	47
321	Table 3. Criteria to select at which life cycle stage level to identify the most relevant processes. ....	51
322	Table 4. Summary of requirements to define most relevant contributions.....	53
323	Table 5. Contribution of different impact categories based on normalised and weighted results.....	53
324	Table 6. Contribution of different life cycle stages to the climate change impact category (based on	
325	the characterised inventory results).....	54
326	Table 7. Contribution of different processes to the climate change impact category (based on the	
327	characterised inventory results) .....	55
328	Table 8. Example of impact assessment results - contribution of each elementary flow to a specific	
329	process (climate change, results expressed in gCO <sub>2eq</sub> ). .....	55
330	Table 9. Most relevant direct elementary flows contributing to climate change (based on the	
331	inventory results before normalisation and weighting) – process level. ....	56
332	Table 10. Identification of the sub-population for Example 2. ....	58
333	Table 11. Summary of the sub-population for example 2. ....	58
334	Table 12. Example – how to calculate the number of companies in each sub-sample.....	59
335	Table 13. CFs (in CO <sub>2</sub> -equivalents, with carbon feedbacks).....	70
336	Table 14. Tier 1 emission factors of IPCC 2006 (modified). ....	73
337	Table 15. Alternative approach for nitrogen modelling. ....	74
338	Table 16: Default allocation factors for cattle at farming.....	78
339	Table 17: Default values to be used for the calculation of NEwool for sheep. ....	79
340	Table 18: Default values to be used for the calculation of NEI for sheep.....	80
341	Table 19: Constants for use in calculating NEg for sheep.....	80
342	Table 20: Default values to be used for the calculation of NEg for sheep.....	81
343	Table 21: Default allocation factors to be used in PEFCR and in EF studies for sheep and goat at	
344	farming stage. ....	82
345	Table 22: Allocation at farming stage between piglets and sows .....	82
346	Table 23: Economic allocation ratios for beef (data already included in the CMWG Report) .....	84
347	Table 24: Economic allocation ratios for pigs (from the meat screening study) .....	85
348	Table 25: Economic allocation ratios for sheep (from the meat screening study). The same allocation	
349	factors shall be used also for goat. ....	85
350	Table 26: Minimal criteria to ensure contractual instruments from suppliers.....	88
351	Table 27: PEFCR guidelines for the use stage. ....	107
352	Table 28: Processes of the use stage of dry pasta (taken from the screening study report, and to be	
353	used as example). The most relevant processes are indicated in the green box. ....	108
354	Table 29: Example activity data and secondary datasets to be used. ....	108
355	Table 30: Requirements regarding R <sub>1</sub> values in relation with the DNM.....	115
356	Table 31: Summary table on how to apply the CFF in different situations. ....	122
357	Table 32: Data source for R2 per packaging application. ....	124
358	Table 33: How to assign the values to DQR criteria when using company-specific information. ....	131
359	Table 34: How to assign the values to DQR criteria when using secondary datasets. ....	131

360	Table 35: Data Needs Matrix (DNM) – Requirements for the applicant of the PEFCR. The options	
361	indicated for each situation are not listed in hierarchical order. ....	135
362	Table 36: Scoring system for each relevant competence and experience topic for the assessment of	
363	the competences of verifier(s).....	142
364	Table 37: Typology of reviews .....	228
365	Table 38: Quality rating for the data quality criteria .....	232
366		

367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
  
386

## 2 List of figures

Figure 1: Definition of a unit process dataset and an aggregated process dataset .....	16
Figure 2: An example of a partially disaggregated dataset, at level 1. The activity data and direct elementary flows are to the left, and the complementing sub-processes in their aggregated form are to the right. The grey text indicates elementary flows.....	18
Figure 3: default transport scenario. ....	96
Figure 4: Processes included and excluded from the use stage. ....	105
Figure 5: Point of substitution at level 1 and at level 2. ....	113
Figure 6: Example of point of substitutions at different steps in the value chain. ....	114
Figure 7: Modelling option when pre-consumer scrap is claimed as pre-consumer recycled content. ....	117
Figure 8: Modelling option when pre-consumer scrap is not claimed as pre-consumer recycled content.....	117
Figure 9: Simplified collection recycling scheme of a material.....	119
Figure 10: Three examples for better understanding of the forest system. ....	224
Figure 11: Two examples for better understanding of carbon stored in forest system and final product.....	225
Figure 12: Minimum level of disaggregation requested for a dataset aggregated at level 1. The yellow box is optional when going beyond the minimum requirements. ....	230

## 3 List of acronyms

388	<b>AF</b>	Allocation Factor
389	<b>AR</b>	Allocation Ratio
390	<b>B2B</b>	Business to Business
391	<b>B2C</b>	Business to Consumer
392	<b>BoC</b>	Bill of Components
393	<b>BoM</b>	Bill of Materials
394	<b>BP</b>	Bonne Pratique
395	<b>CF</b>	Characterization Factor
396	<b>CFF</b>	Circular Footprint Formula
397	<b>CFF-M</b>	Circular Footprint Formula – Modular form
398	<b>CMWG</b>	Cattle Model Working Group
399	<b>CPA</b>	Classification of Products by Activity
400	<b>DC</b>	Distribution Centre
401	<b>DMI</b>	Dry Matter Intake
402	<b>DNM</b>	Data Needs Matrix
403	<b>DQR</b>	Data Quality Rating
404	<b>EA</b>	Economic Allocation
405	<b>EC</b>	European Commission
406	<b>EF</b>	Environmental Footprint
407	<b>EI</b>	Environmental Impact
408	<b>EoL</b>	End-of-Life
409	<b>FU</b>	Functional Unit
410	<b>GE</b>	Gross Energy intake
411	<b>GR</b>	Geographical Representativeness
412	<b>GHG</b>	Greenhouse Gas
413	<b>GWP</b>	Global Warming Potential
414	<b>HD</b>	Helpdesk
415	<b>ILCD</b>	International Reference Life Cycle Data System
416	<b>IPCC</b>	Intergovernmental Panel on Climate Change
417	<b>ISO</b>	International Organisation for Standardisation
418	<b>JRC</b>	Joint Research Centre
419	<b>LCDN</b>	Life Cycle Data Network
420	<b>LCA</b>	Life Cycle Assessment
421	<b>LCI</b>	Life Cycle Inventory
422	<b>LCIA</b>	Life Cycle Impact Assessment
423	<b>LT</b>	Lifetime
424	<b>NDA</b>	Non Disclosure Agreement
425	<b>NGO</b>	Non-Governmental Organisation
426	<b>NMVOC</b>	Non-methane volatile compounds
427	<b>P</b>	Precision
428	<b>PCR</b>	Product Category Rules
429	<b>PEF</b>	Product Environmental Footprint
430	<b>PEFCR</b>	Product Environmental Footprint Category Rules
431	<b>RF</b>	Reference Flow
432	<b>RP</b>	Representative Product
433	<b>SB</b>	System Boundary
434	<b>SC</b>	Steering Committee
435	<b>SMRS</b>	Sustainability Measurement & Reporting System
436	<b>SS</b>	Supporting study

437	<b>TAB</b>	Technical Advisory Board
438	<b>TeR</b>	Technological Representativeness
439	<b>TiR</b>	Time Representativeness
440	<b>TS</b>	Technical Secretariat
441	<b>UNEP</b>	United Nations Environment Programme
442	<b>UUID</b>	Universally Unique Identifier
443		

## 4 Terms and definitions

444  
445  
446  
447  
  
448  
449  
450  
451  
452  
453  
454  
455  
  
456  
457  
458  
459  
460  
461  
  
462  
463  
  
464  
465  
466  
467  
468  
  
469  
470  
471  
  
472

For all terms used in this Guidance and not defined below, please refer to the most updated version of the Product Environmental Footprint (PEF) Guide, ISO 14025:2006, ISO 14040-44:2006, and the ENVIFOOD Protocol.

**Activity data** - This term refers to information which is associated with processes while modelling Life Cycle Inventories (LCI). In the PEF Guide it is also called “non-elementary flows”. The aggregated LCI results of the process chains that represent the activities of a process are each multiplied by the corresponding activity data<sup>1</sup> and then combined to derive the environmental footprint associated with that process (See Figure 1). Examples of activity data include quantity of kilowatt-hours of electricity used, quantity of fuel used, output of a process (e.g. waste), number of hours equipment is operated, distance travelled, floor area of a building, etc. In the context of PEF the amounts of ingredients from the bill of material (BOM) shall always be considered as activity data.

**Aggregated dataset** - This term is defined as a life cycle inventory of multiple unit processes (e.g. material or energy production) or life cycle stages (cradle-to-gate), but for which the inputs and outputs are provided only at the aggregated level. Aggregated datasets are also called "LCI results", “cumulative inventory” or “system processes” datasets. The aggregated dataset can have been aggregated horizontally and/or vertically. Depending on the specific situation and modelling choices a "unit process" dataset can also be aggregated. See Figure 1<sup>2</sup>.

**Application specific** – It refers to the generic aspect of the specific application in which a material is used. For example, the average recycling rate of PET in bottles.


**Benchmark** – A standard or point of reference against which any comparison can be made. In the context of PEF, the term ‘benchmark’ refers to the average environmental performance of the representative product sold in the EU market. A benchmark may eventually be used, if appropriate, in the context of communicating environmental performance of a product belonging to the same category.

**Bill of materials** – A bill of materials or product structure (sometimes bill of material, BOM or associated list) is a list of the raw materials, sub-assemblies, intermediate assemblies, sub-components, parts and the quantities of each needed to manufacture an end product.

---

<sup>1</sup> Based on GHG protocol scope 3 definition from the Corporate Accounting and Reporting Standard (World resources institute, 2011).

<sup>2</sup> Source: UNEP/SETAC “Global Guidance Principles for LCA Databases”

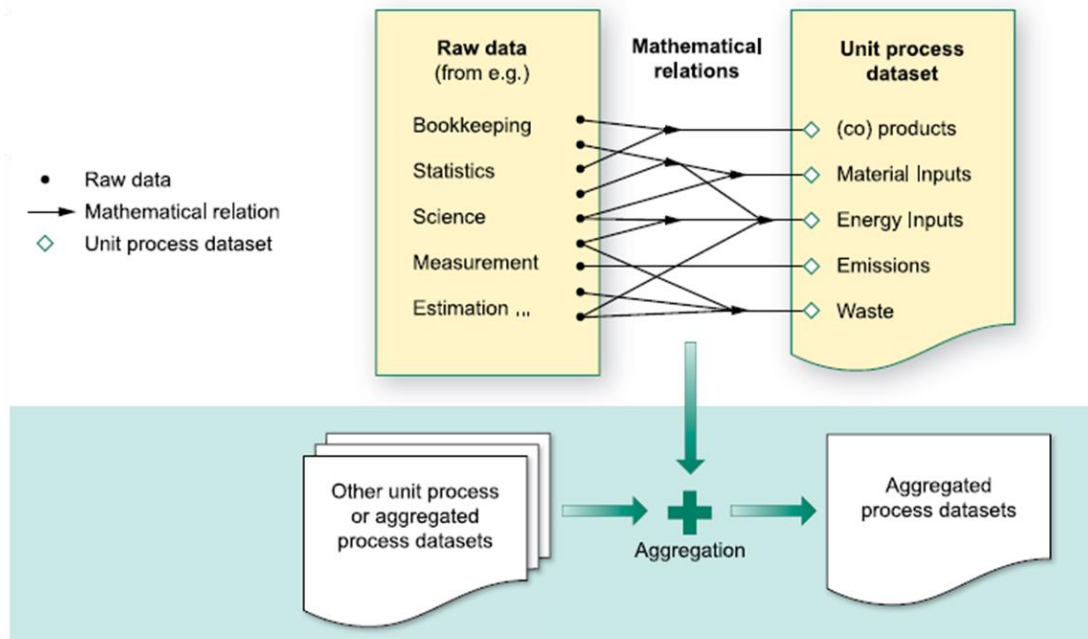

473  
474 **Figure 1: Definition of a unit process dataset and an aggregated process dataset**

475 **Business to Business (B2B)** – Describes transactions between businesses, such as between a  
476 manufacturer and a wholesaler, or between a wholesaler and a retailer.

477 **Business to Consumers (B2C)** – Describes transactions between business and consumers, such as  
478 between retailers and consumers. According to ISO 14025:2006, a consumer is defined as “an  
479 individual member of the general public purchasing or using goods, property or services for private  
480 purposes”.

481 **Commissioner of the EF study** - Organisation (or group of organisations) that finances the EF study  
482 in accordance with the PEF Guide, PEFCR Guidance and the relevant PEFCR, if available (definition  
483 adapted from ISO 14071/2014, point 3.4).

484 **Company-specific data** – It refers to directly measured or collected data from one or multiple  
485 facilities (site-specific data) that are representative for the activities of the company. It is  
486 synonymous to “primary data”. To determine the level of representativeness a sampling procedure  
487 can be applied.

488 **Comparative assertion** – An environmental claim regarding the superiority or equivalence of one  
489 product versus a competing product that performs the same function (adapted from ISO  
490 14025:2006).

491 **Comparison** – A comparison, not including a comparative assertion, (graphic or otherwise) of two or  
492 more products based on the results of a PEF study and supporting PEFCRs or the comparison of one  
493 or more products against the benchmark, based on the results of a PEF study and supporting  
494 PEFCRs.

495 **Data Quality Rating (DQR)** - Semi-quantitative assessment of the quality criteria of a dataset based  
496 on Technological representativeness, Geographical representativeness, Time-related



497 representativeness, and Precision. The data quality shall be considered as the quality of the dataset  
498 as documented.

499 **Direct elementary flows** (also named elementary flows) – All output emissions and input resource  
500 use that arise directly in the context of a process. Examples are emissions from a chemical process,  
501 or fugitive emissions from a boiler directly onsite. See Figure 2.

502 **Disaggregation** – The process that breaks down an aggregated dataset into smaller unit process  
503 datasets (horizontal or vertical). The disaggregation can help making data more specific. The process  
504 of disaggregation should never compromise or threat to compromise the quality and consistency of  
505 the original aggregated dataset

506 **EF communication vehicles** – It includes all the possible ways that can be used to communicate the  
507 results of the EF study to the stakeholders. The list of EF communication vehicles includes, but it is  
508 not limited to, labels, environmental product declarations, green claims, websites, infographics, etc.

509 **EF report** – Document that summarises the results of the EF study. For the EF report the template  
510 provided as annex to the PECFR Guidance shall be used. In case the commissioner of the EF study  
511 decides to communicate the results of the EF study (independently from the communication vehicle  
512 used), the EF report shall be made available for free through the commissioner’s website. The EF  
513 report shall not contain any information that is considered as confidential by the commissioner,  
514 however the confidential information shall be provided to the verifier(s).

515 **EF study** – Term used to identify the totality of actions needed to calculate the EF results. It includes  
516 the modelisation, the data collection, and the analysis of the results.

517 **Electricity tracking**<sup>3</sup> – Electricity tracking is the process of assigning electricity generation attributes  
518 to electricity consumption.

519 **Elementary flow** - Material or energy entering the system being studied that has been drawn from  
520 the environment without previous human transformation, or material or energy leaving the system  
521 being studied that is released into the environment without subsequent human transformation.

522 **Environmental aspect** – Element of an organization’s activities or products or services that interacts  
523 or can interact with the environment (ISO 14001:2015)

524 **External Communication** – Communication to any interested party other than the commissioner or  
525 the practitioner of the study.

526 **Foreground elementary flows** - Direct elementary flows (emissions and resources) for which access  
527 to primary data (or company-specific information) is available.

528 **Independent external expert** – Competent person, not employed in a full-time or part-time role by  
529 the commissioner of the EF study or the practitioner of the EF study, and not involved in defining the  
530 scope or conducting the EF study (adapted from ISO 14071/2014, point 3.2).

---

<sup>3</sup> <https://ec.europa.eu/energy/intelligent/projects/en/projects/e-track-ii>

531 **Input flows** – Product, material or energy flow that enters a unit process. Products and materials  
532 include raw materials, intermediate products and co-products (ISO 14040:2006).

533 **Intermediate product** - An intermediate product is a product that requires further processing before  
534 it is saleable to the final consumer.

535 **Lead verifier** – Verifier taking part in a verification team with additional responsibilities compared to  
536 the other verifiers in the team.


537 **Life Cycle Inventory (LCI)** - The combined set of exchanges of elementary, waste and product flows  
538 in a LCI dataset.

539 **Life Cycle Inventory (LCI) dataset** - A document or file with life cycle information of a specified  
540 product or other reference (e.g., site, process), covering descriptive metadata and quantitative life  
541 cycle inventory. A LCI dataset could be a unit process dataset, partially aggregated or an aggregated  
542 dataset.

543 **Material-specific** – It refers to a generic aspect of a material. For example, the recycling rate of PET.

544 **Output flows** – Product, material or energy flow that leaves a unit process. Products and materials  
545 include raw materials, intermediate products, co-products and releases (ISO 14040:2006).

546 **Partially disaggregated dataset** - A dataset with a LCI that contains elementary flows and activity  
547 data, and that only in combination with its complementing underlying datasets yield a complete  
548 aggregated LCI data set. We refer to a partially disaggregated dataset at level 1 in case the LCI  
549 contains elementary flows and activity data, while all complementing underlying dataset are in their  
550 aggregated form (see an example in Figure 2).

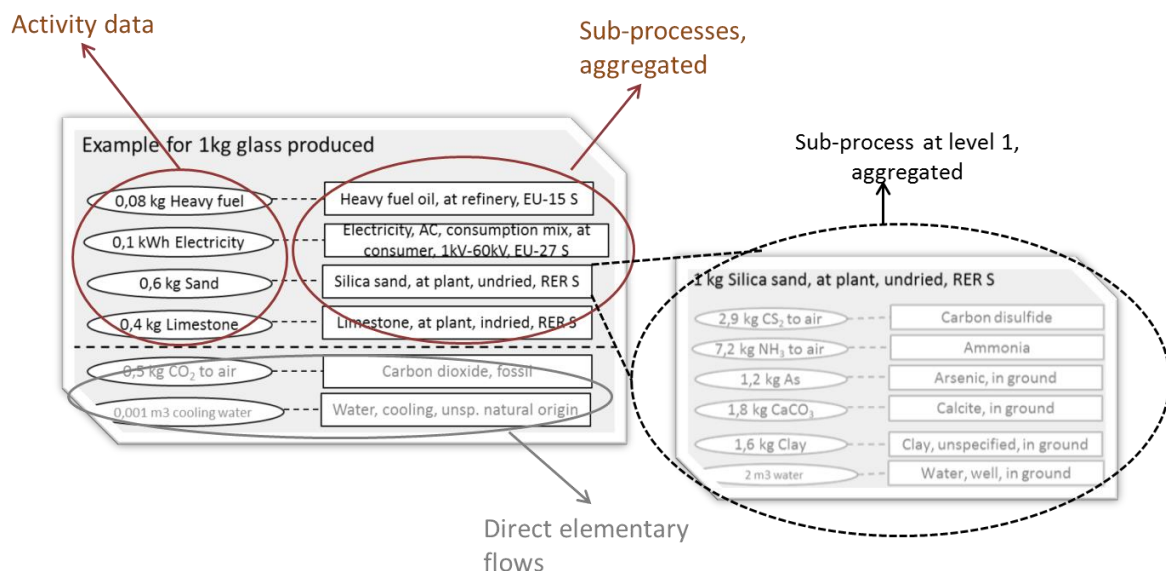

551

552 **Figure 2: An example of a partially disaggregated dataset, at level 1. The activity data and direct**  
553 **elementary flows are to the left, and the complementing sub-processes in their aggregated form are to the**  
554 **right. The grey text indicates elementary flows**

555 **PEFCR Supporting study** – The PEF study done on the basis of a draft PEFCR. It is used to confirm the  
556 decisions taken in the draft PEFCR before the final PEFCR is released.

557 **PEF Profile** – The quantified results of a PEF study. It includes the quantification of the impacts for  
558 the various impact categories and the additional environmental information considered necessary to  
559 be reported.

560 **PEF screening** – A preliminary study carried out on the representative product(s) and intended to  
561 identify the most relevant life cycle stages, processes, elementary flows, impact categories and data  
562 quality needs to derive the preliminary indication about the definition of the benchmark for the  
563 product category/sub-categories in scope, and any other major requirement to be part of the final  
564 PEFCR.

565 **Population** - Any finite or infinite aggregation of individuals, not necessarily animate, subject to a  
566 statistical study.

567 **Practitioner of the EF study** – Individual, organisation or group of organisations that performs the EF  
568 study in accordance with the PEF Guide, PEFCR Guidance and the relevant PEFCR if available. The  
569 practitioner of the EF study can belong to the same organisation as the commissioner of the EF study  
570 (adapted from ISO 14071/2014, point 3.6).

571 **Primary data**<sup>4</sup> - This term refers to data from specific processes within the supply-chain of the  
572 company applying the PEFCR. Such data may take the form of activity data, or foreground  
573 elementary flows (life cycle inventory). Primary data are site-specific, company-specific (if multiple  
574 sites for the same product) or supply-chain-specific. Primary data may be obtained through meter  
575 readings, purchase records, utility bills, engineering models, direct monitoring, material/product  
576 balances, stoichiometry, or other methods for obtaining data from specific processes in the value  
577 chain of the company applying the PEFCR. In this Guidance, primary data is synonym of "company-  
578 specific data" or "supply-chain specific data".

579 **Product category** – Group of products (or services) that can fulfil equivalent functions (ISO  
580 14025:2006).

581 **Product Category Rules (PCR)** – Set of specific rules, requirements and guidelines for developing  
582 Type III environmental declarations for one or more product categories (ISO 14025:2006).

583 **Product Environmental Footprint Category Rules (PEFCRs)** – Product category-specific, life-cycle-  
584 based rules that complement general methodological guidance for PEF studies by providing further  
585 specification at the level of a specific product category. PEFCRs help to shift the focus of the PEF  
586 study towards those aspects and parameters that matter the most, and hence contribute to  
587 increased relevance, reproducibility and consistency of the results by reducing costs versus a study  
588 based on the comprehensive requirements of the PEF guide.

---

<sup>4</sup> Based on GHG protocol scope 3 definition from the Corporate Accounting and Reporting Standard (World resources institute, 20011).

589 **Refurbishment** – It is the process of restoring components to a functional and/or satisfactory state  
590 to the original specification (providing the same function), using methods such as resurfacing,  
591 repainting, etc. Refurbished products may have been tested and verified to function properly.

592 **Representative product (model)** - The “representative product” may or may not be a real product  
593 that one can buy on the EU market. Especially when the market is made up of different technologies,  
594 the “representative product” can be a virtual (non-existing) product built, for example, from the  
595 average EU sales-weighted characteristics of all technologies around. A PEFCR may include more  
596 than one representative product if appropriate.

597 **Representative sample** – A representative sample with respect to one or more variables is a sample  
598 in which the distribution of these variables is exactly the same (or similar) as in the population from  
599 which the sample is a subset

600 **Sample** – A sample is a subset containing the characteristics of a larger population. Samples are used  
601 in statistical testing when population sizes are too large for the test to include all possible members  
602 or observations. A sample should represent the whole population and not reflect bias toward a  
603 specific attribute.

604 **Secondary data**<sup>5</sup> - It refers to data not from specific process within the supply-chain of the company  
605 applying the PEFCR. This refers to data that is not directly collected, measured, or estimated by the  
606 company, but sourced from a third party life-cycle-inventory database or other sources. Secondary  
607 data includes industry-average data (e.g., from published production data, government statistics,  
608 and industry associations), literature studies, engineering studies and patents, and can also be based  
609 on financial data, and contain proxy data, and other generic data.

610 **Site-specific data** – It refers to directly measured or collected data from one facility (production  
611 site). It is synonymous to “primary data”.

612 **Sub-population** – In this document this term indicates any finite or infinite aggregation of  
613 individuals, not necessarily animate, subject to a statistical study that constitutes a homogenous  
614 sub-set of the whole population. Sometimes the word "stratum" can be used as well.

615 **Sub-processes** - Those processes used to represent the activities of the level 1 processes (=building  
616 blocks). Sub-processes can be presented in their (partially) aggregated form (see Figure 2).

617 **Sub-sample** - In this document this term indicates a sample of a sub-population.

618 **Supply-chain** – It refers to all of the upstream and downstream activities associated with the  
619 operations of the company applying the PEFCR, including the use of sold products by consumers and  
620 the end-of-life treatment of sold products after consumer use.

621 **Supply-chain specific** – It refers to a specific aspect of the specific supply-chain of a company. For  
622 example the recycled content value of an aluminium can produced by a specific company.

---

<sup>5</sup> Based on GHG protocol scope 3 definition from the Corporate Accounting and Reporting Standard (World resources institute, 20011)

623 **Type III environmental declaration** – An environmental declaration providing quantified  
624 environmental data using predetermined parameters and, where relevant, additional environmental  
625 information (ISO 14025:2006). The predetermined parameters are based on the ISO 14040 series of  
626 standards, which is made up of ISO 14040 and ISO 14044.

627 **Unit process dataset** - Smallest element considered in the life cycle inventory analysis for which  
628 input and output data are quantified (ISO 14040:2006). In LCA practice, both physically not further  
629 separable processes (such as unit operations in production plants, then called “unit process single  
630 operation”) and also whole production sites are covered under "unit process", then called “unit  
631 process, black box” (ILCD Handbook).

632 **Validation statement** – Conclusive document aggregating the conclusions from the *verifiers* or the  
633 verification team regarding the EF study. This document is mandatory and shall be electronically or  
634 physically signed by the *verifier or in case of a* verification panel, by the lead verifier. The minimum  
635 content of the validation statement is provided in this document.

636 **Verification report** – Documentation of the verification process and findings, including detailed  
637 comments from the *Verifier(s)*, as well as the corresponding responses. This document is mandatory,  
638 but it can be confidential. However, it shall be signed, electronically or physically, by the *verifier or in*  
639 *case of a* verification panel, by the lead verifier.

640 **Verification team** – Team of verifiers that will perform the verification of the EF study, of the EF  
641 report and the EF communication vehicles.

642 **Verifier** – Independent external expert performing a verification of the EF study and eventually  
643 taking part in a verification team.

## 644 **5 Rationale**

645 The Product Environmental Footprint (PEF) is a Life Cycle Assessment (LCA) based method to  
646 quantify the relevant environmental impacts of products (goods or services). It builds on existing  
647 approaches and international standards. The aim of the PEF is to set the basis for better  
648 reproducibility and comparability of the results. However, comparability is only possible if the results  
649 are based on the same Product Environmental Footprint Category Rules (PEFCR).

650 In recent years, the increasing demand for LCA based product declarations, such as Environmental  
651 Product Declarations have generated a need for rules for making declarations on products within the  
652 same category. These rules are defined as Product Category Rules (PCRs) in ISO 14025, Product Rules  
653 in the GHG Protocol Product Life Cycle Accounting and Reporting Standard and Supplementary  
654 Requirements in PAS 2050. Other standards such as BP-X30 (France), SMRS (Sustainability  
655 Consortium), TS 0100 (Japan), and the technical specification ISO/TS 14067:2013 also require the use  
656 of PCRs for making comparative product declarations. (For the complete reference to these  
657 documents please refer to section 5.3 of this Guidance)

658 All these initiatives indicate the growing demand for such information from both public and private  
659 actors, but also represent a challenge as the PCR are not fully consistent.

660 The objective of making the different methods, data requirements and supporting tools converge is  
661 shared by many stakeholders involved at different levels in the LCA world (e.g. the GLAD initiative  
662 led by UN Environment). This PEFCR Guidance represents a contribution towards this goal.

663 By having a unique set of requirements for developing PEFCRs at European level the overall  
664 methodological landscape related to this important element can be greatly simplified and made  
665 more consistent.

### 666 **5.1 Terminology: shall, should and may**

667 This Guidance uses precise terminology to indicate the requirements, the recommendations and  
668 options that could be chosen when developing a PEFCR.

669 The term “shall” is used to indicate what is required in order for a PEFCR to be in conformance with  
670 this PEFCR Guidance.

671 The term “should” is used to indicate a recommendation rather than a requirement. Any deviation  
672 from a “should” requirement has to be justified when developing the PEFCR and made transparent.

673 The term “may” is used to indicate an option that is permissible. Whenever options are available,  
674 the PEFCR shall include adequate argumentation to justify the chosen option.

### 675 **5.2 Definition and purpose of a PEFCR**

676 PEFCRs provide specific guidance for calculating products' life cycle potential environmental impacts.

677 Rules analogous to PEFCRs exist in standards for other types of life cycle-based product claims, such  
678 as ISO 14025:2006 (type III environmental declarations). PEFCRs were named differently in order to  
679 prevent confusion with other analogous rules and uniquely identify rules under the PEF Guide.

680 Based on an analysis carried out by JRC in 2010<sup>6</sup>, the Commission came to the conclusion that  
681 existing life cycle-based standards do not provide sufficient specificity to ensure that the same  
682 assumptions, measurements and calculations are made to support comparability of environmental  
683 claims across products delivering the same function. PEFCRs aim at increasing reproducibility,  
684 relevance and consistency of PEF studies.

685 PEFCRs should be developed and written in a format that persons with technical knowledge (in LCA  
686 as well as with regard to the considered product category) can understand it and use it to conduct a  
687 PEF study. Acronyms and technical jargons should be avoided as much as possible. The PEFCRs shall  
688 implement the materiality principle, meaning that a PEF study shall focus on those aspects and  
689 parameters that are the most relevant in determining the environmental performance of a given  
690 product. By doing this the time, efforts and costs necessary to carry out the analysis are reduced.

691 Each PEFCR shall specify the minimum list of processes (called mandatory processes) that shall  
692 always be covered by company-specific data. The purpose is to avoid that an applicant without  
693 access to the relevant company-specific primary data is allowed to perform a PEF study and  
694 communicate its results by only applying default data. The PEFCR shall define this mandatory list of  
695 processes based on their relevance and the possibility to have access to company-specific data. A  
696 PEFCR shall further specify requirements made in the general PEF Guide and shall add new  
697 requirements where the PEF Guide provides several choices or where the PEF Guide does not cover  
698 sufficiently the particularity of life cycle of a specific product category.

699 PEFCRs shall be developed according to the latest version available of this Guidance. Whenever  
700 there are conflicting requirements between this Guidance and the most recent version of the PEF  
701 Guide adopted by the Commission, the former prevails over the latter. In the absence of an  
702 approved PEFCR a PEF study shall be carried out in compliance with the most recent version of the  
703 PEF Guide adopted by the Commission and this PEFCR Guidance.

704 For PEFCRs with Representative Products concerning food, feed, and drinks, the most recent version  
705 of the ENVIFOOD Protocol shall be used as complementary guidance to the requirements in the PEF  
706 Guide and this PEFCR Guidance. In case of conflicting requirements between the PEF Guide (or the  
707 PEFCR Guidance) and the ENVIFOOD Protocol, the first prevail over the second.

### 708 **5.3 Relationship to other methods and standards**

709 This PEFCR Guidance includes several elements taken from other relevant documents such as:

- 710 ● PEF Guide, Annex to Commission Recommendation 2013/179/EU on the use of common  
711 methods to measure and communicate the life cycle environmental performance of

---

<sup>6</sup> [Analysis of Existing Environmental Footprint Methodologies for Products and Organizations: Recommendations, Rationale, and Alignment](http://ec.europa.eu/environment/eusd/smgp/dev_methods.htm) (2010), available at: [http://ec.europa.eu/environment/eusd/smgp/dev\\_methods.htm](http://ec.europa.eu/environment/eusd/smgp/dev_methods.htm)

712 products and organisations (April 2013) and available at  
713 <http://ec.europa.eu/environment/eussd/smgp/index.htm>  
714 <http://ec.europa.eu/environment/eussd/smgp/index.htm>

- 715 ● ISO 14025:2006 - Environmental labels and declarations – Type III environmental  
716 declarations – Principles and procedures (ISO)
- 717 ● BP X30-323-0:2011 - Principes généraux pour l'affichage environnemental des produits de  
718 grande consommation (AFNOR, France)
- 719 ● Greenhouse Gas Product Accounting and Reporting Standard (GHG Protocol, 2011)
- 720 ● PAS 2050 - Specification for the assessment of the life cycle greenhouse gas emissions of  
721 goods and services (BSI, 2011)
- 722 ● ISO 14020:2000 Environmental labels and declarations – General principles
- 723 ● ISO 14021:1999 Environmental labels and declarations – Self-declared environmental  
724 claims (Type II environmental labelling)
- 725 ● ISO 14040:2006 Environmental management – Life cycle assessment –Principles and  
726 framework
- 727 ● ISO 14044:2006 Environmental management – Life cycle assessment –Requirements and  
728 guidelines
- 729 ● ISO 14050:2006 Environmental management – vocabulary
- 730 ● ISO/TS 14067:2013 Greenhouse gases -- Carbon footprint of products -- Requirements and  
731 guidelines for quantification and communication
- 732 ● ISO 17024:2003 Conformity assessment – General requirements for bodies operating  
733 certification of persons.
- 734 ● ISO/TS 14071:2014 Environmental management – Life cycle assessment – Critical review  
735 processes and reviewer competencies: Additional requirements and guidelines to ISO  
736 14044:2006
- 737 ● ISO 14046:2014 Environmental management -- Water footprint -- Principles, requirements  
738 and guidelines
- 739 ● ENVIFOOD PROTOCOL - Food SCP RT (2013), ENVIFOOD Protocol, Environmental Assessment  
740 of Food and Drink Protocol, European Food Sustainable Consumption and Production Round  
741 Table (SCP RT), Working Group 1, Brussels, Belgium.

## 742 **5.4 Intended audience**

743 The intended audience of this Guidance document includes:

- 744 ● stakeholders participating in the development of PEFCRs;
- 745 ● stakeholders implementing an approved PEFCR;
- 746 ● stakeholders carrying out a PEF study for product groups not covered by an approved PEFCR.

747



# 6 Governance and procedures

748

749

## 6.1 Organisational structure of the EF pilot phase

750 The participation to the EF pilot phase is a pro bono activity carried out by all stakeholders  
751 interested in a specific product category or sector. In order to organise and coordinate the work in  
752 the best way possible the following structure is considered to be necessary:  
753

- 754 • A Steering Committee (SC)
- 755 • A Technical Advisory Board (TAB)
- 756 • A Technical Secretariat (TS)
- 757 • An EF technical helpdesk
- 758 • An EF virtual consultation Forum (EF Wiki)  
759 (<https://webgate.ec.europa.eu/fpfis/wikis/display/EUENVFP/>)

### 6.1.1 EF Pilot Steering Committee (SC)

760 For the whole duration of the EF pilot phase a Steering Committee is set up.

761 The composition of the Steering Committee and its rules for procedure are available at:  
762 <https://webgate.ec.europa.eu/fpfis/wikis/display/EUENVFP/Steering+Committee+workspace>  
763

764 The Commission chairs the meetings and is responsible for all activities related to its organisation  
765 and management.

766 The role of the Steering Committee is:

- 767 a) Approve the scope and the definition of the representative product/ organisation for each  
768 PEFCR developed within the EF pilot phase. When relevant, the opinion expressed by the  
769 Technical Advisory Board on these documents will be taken in consideration by the Steering  
770 Committee;
- 771 b) Monitor the progress in each PEFCR/ OEFSR pilot;
- 772 c) Exchange information about challenges and lessons learnt in each pilot;
- 773 d) Decide on review requirements for the EF pilot phase;
- 774 e) Express an opinion on the second draft of a PEFCR before starting the supporting studies and  
775 the communication phase;
- 776 f) Approve the final PEFCR;
- 777 g) Contribute, review, comment on the development of the "footprint weighting method" as  
778 developed by JRC-IES;
- 779 h) Solve any conflicts that might arise during the implementation of the environmental  
780 footprint pilot exercise

781 When the decision of the Steering Committee might have an impact on the general requirements  
782 included in the PEF or OEF Guides, these changes shall be preventively agreed with the Commission.

### 783 **6.1.2 The EF Technical Advisory Board (TAB)**

784 Each member of the EF Pilot Steering Committee may appoint up to 1 expert to be member of the  
785 Technical Advisory Board to the Steering Committee. The Commission chairs the meetings and is  
786 responsible for all activities related to its organisation and management.

787 The role of the Technical Advisory Board member is (non-exhaustive list) to:

- 788 a) Provide support to the Steering Committee members that have appointed them on the  
789 scope of the product category or sector for each PEFCR developed within the EF pilot phase;
- 790 b) Check and advise the Steering Committee members on consistency of approaches among  
791 different PEF pilot category rules, including but not limited to how to identify the  
792 representative product/organisation and how to develop benchmarks;
- 793 c) Provide technical advice to the Steering Committee members about draft PEFCRs (based on  
794 the results of the screening);
- 795 d) Provide technical advice to the Steering Committee members in case of issues related to the  
796 implementation of PEF requirements;
- 797 e) Provide support to the Steering Committee members on decision related to review and  
798 verification;
- 799 f) Express an opinion to the Steering Committee members on the final PEFCR before approval.

800 Furthermore, the TAB expresses its opinion and input to the Commission on technical issues that are  
801 of cross-cutting relevance to several EF pilots.

### 802 **6.1.3 The Technical Secretariat (TS)**

803 For each pilot there shall be a Technical Secretariat. The Technical Secretariat is responsible for the  
804 following activities:

- 805 a) Overall drafting of the PEFCR proposal;
- 806 b) Preparing, maintaining and communicating all instructions related to the PEFCR  
807 development process;
- 808 c) Facilitating harmonisation with existing PCRs;
- 809 d) Organising the physical consultation meetings, including preparation of the agenda, sending  
810 the invitation, drafting supporting documents, taking minutes during the meetings;
- 811 e) Organising the consultation periods according to the rules and timing specified in 6.6.2. This  
812 task includes the drafting of the PEFCR chapters, collection and analysis of the comments  
813 received, and the drafting of the document analysis how the comments have been  
814 addressed;
- 815 f) Supporting the management of the EF consultation Forum. This activity includes tasks such  
816 as the drafting of publicly available explanatory materials related to their EF pilot category  
817 rules activities and the publication of the names of the organizations (not individual names)  
818 involved as stakeholders in the PEFCR development process;
- 819 g) Ensuring that the PEF screening is performed, the representative model developed and all  
820 the PEF calculations necessary run as requested in this Guidance;
- 821 h) Periodically updating in the EF virtual consultation Forum a list of all the documents  
822 consulted during the PEFCR development process;

823 i) Ensuring the selection of and appointment of competent independent PEFCR review panel  
824 members.

825 During the EU PEF Pilot study the role of Technical Secretariat may be played by a single company,  
826 an industrial association, an NGO, a Member State, or a national or an international Institution (e.g.  
827 the Commission), a university or research institute. The preferable option would be that the  
828 Technical Secretariat is constituted by a mix of the previously mentioned organisations.

829 The Technical Secretariat shall appoint a chair and will identify a Product Category Coordinator. The  
830 chair shall coordinate the different tasks of the Technical Secretariat and chair the physical  
831 consultation meetings, whilst the Product Category Coordinator represents the Technical Secretariat  
832 in the Steering Committee.

#### 833 **6.1.4 The EF Technical Helpdesk**

834 For the whole duration of the EF pilot phase the Commission has made an external technical  
835 helpdesk available. The role of this helpdesk is to:

- 836 • Support the Commission in the revision of any document released by the Technical  
837 Secretariats (e.g. the representative product model, draft PEFCR, etc.),
- 838 • support the activities of each category rule/sectoral rule pilot providing technical assistance  
839 related to the application of the PEF/OEF Guide,
- 840 • provide explanations and support on specific steps of the PEFCR/OEFSR development  
841 process,
- 842 • provide specific training sessions during the EF pilot phase,
- 843 • manage the virtual consultation Forum.

#### 844 **6.1.5 The EF consultation forum**

845 A dedicated website (wiki pages) has been created and it will be maintained during the whole  
846 duration of the Environmental Footprint (EF) pilot phase. It is available at:  
847 <https://webgate.ec.europa.eu/fpfis/wikis/display/EUENVFP/>.

848 The EF virtual consultation Forum is the location where all documents related to the PEF/OEF pilot  
849 category rules/sectoral rules are stored, where each consultation step is carried out, where the  
850 periodic communication on the pilots' advancements are taking place. A separate working space is  
851 available for each OEFSR and PEFCR pilot.

852 The virtual consultation Forum is managed by the Commission with the active involvement of the EF  
853 Technical Helpdesk and each Technical Secretariat.

## 854 **6.2 Stakeholders involved in PEFCR development**

855 The process of developing PEFCRs shall be open and transparent and shall include an open  
856 consultative format with relevant stakeholders.

857 The stakeholders should be involved following a supply chain approach. The relevant stakeholders  
858 for a PEFCR may include, but are not limited to, material suppliers, manufacturers, trade  
859 associations, purchasers, users, consumers, government representatives, non-governmental

860 organizations (NGOs), public agencies and, when relevant, independent parties and certification  
861 bodies.

### 862 **6.3 PEFCR scope definition**

863 The primary objective of a PEFCR is to fix a consistent set of rules to calculate the relevant  
864 environmental information of products within the same category. An equally important objective is  
865 to enable comparisons and comparative assertions in all cases when this is considered feasible,  
866 relevant and appropriate.

867 The granularity of the scope, the number of representative products chosen and the approach to  
868 identify the benchmarks are key decisions that shall be identified and justified in an extensive and  
869 transparent way in the PEFCR document (see chapter 7 and Annex B for more info on the content of  
870 a PEFCR).

871 Meaningful comparisons can only be made when products are capable of fulfilling the same function  
872 (as expressed in the functional unit). Therefore, the scope of a PEFCR should be based on a function-  
873 based approach, whenever feasible and appropriate. This approach also enables to link the product  
874 category with the CPA/NACE codes and is line with the definition of a product category by ISO  
875 14025:2006 (i.e. a group of products that can fulfil equivalent functions)<sup>7</sup>. However, intermediate  
876 products can fulfil multiple functions, therefore a more traditional, material-based approach might  
877 be the best choice there (named also declared unit).

878 Pilot testers are advised to define an as broad as possible scope for the PEFCR, including all products  
879 that are capable of fulfilling the same function. A too narrow (small) product category definition  
880 would result in a very large number of PEFCRs, diminishing the usefulness of the developed PEFCRs.  
881 In its extreme, it could lead to meaningless PEFCRs.

### 882 **6.4 Modularity in PEFCRs**

883 The decision on how wide or narrow the scope of a PEFCR should be is a mix of a political and  
884 technical decision.

885 The first issue that should be clarified is if the product in focus is a final product (meaning something  
886 that is bought and used as it is, without requesting any further significant processing, like drinks,  
887 paints, apparel, etc.) or an intermediate product (e.g. paper pulp, some construction products). This  
888 difference is important because it entails further methodological differences at a later stage. For  
889 example whilst for a final product it may be allowed to focus the communication of the  
890 environmental performance only on the most relevant impacts, processes and life cycle stages, this  
891 is not possible for intermediate products, as such cut-offs would introduce important biases in the  
892 assessment of any further products using the intermediate one.

893 In case of intermediate products the PEFCR becomes a “module” to be used when developing  
894 PEFCRs for products further down that supply chain. This is equally applicable if the intermediate  
895 product can be used in different supply chains (e.g., metal sheets). The development of “modules” is  
896 essential to keep the number of PEFCRs to a manageable number. Moreover, they allow for a higher  
897 level of consistency among different supply chains that are using such modules as part of their life

---

<sup>7</sup> However, first the scope of the product category shall be defined and only after in the PEFCR it has to be listed which are corresponding CPA codes.

898 cycle assessment. The possibility to build such modules should always be considered also for final  
899 products, especially for those products that share part of the production chain till a certain moment  
900 and then differentiate due to different functions (e.g. detergents).

901 When developing PEFCR of products different in nature (e.g. based on different materials) but  
902 having the same functional unit (e.g. thermal insulation products) a suggested approach consists in  
903 developing a PEFCR having a common set of horizontal rules (applicable to all materials) combined  
904 with vertical set of rules, specific to each material.

905 Available PEFCRs shall always be used as modules when developing new PEFCRs or revising existing  
906 ones. As a general rule, the scope of a PEFCR is to rule on the specific processes of the participating  
907 industry and only in so far as they are reasonably expected to be usually operated by the PEF  
908 applying companies (situation 1 in the Data Need matrix, see chapter 7.19.4 for more information).  
909 Any exception to this general rule shall be adequately justified by the TS developing the new/revised  
910 PEFCR and be subject to stakeholder consultation. For example, many food-related pilots rely on a  
911 sometime long list of “ingredients”. The standard approach would require that the PEFCR refers to  
912 secondary datasets for all the ingredients that are not produced by the company expected to apply  
913 the PEFCR. If the TS decide differently, they shall try to involve the ingredients’ producers to confirm  
914 that the modelling rules proposed are consistent with the current practice. Once a PEFCR on one of  
915 these ingredients becomes available, they shall be used in new or revised PEFCRs using that  
916 ingredient. It is therefore important that the final representative product(s) are delivered as PEF-  
917 compliant (see Annex I) LCI datasets, including meta-data information.

## 918 **6.5 Steps to carry out before the creation of a new PEFCR**

919 There are many existing PCRs for several product categories. Before starting the development of a  
920 new PEFCR, the Technical Secretariat shall carry out a thorough search to identify if PCRs<sup>8</sup> for the  
921 same product category have been developed<sup>9</sup>.

922 If no PCRs for the product category of interest are found suitable to be used as basis for the PEFCR,  
923 the Technical Secretariat shall move forward to develop its own PEFCR “from scratch”. However,  
924 when the Technical Secretariat finds that a PCR exists for the same or overlapping product category  
925 in one or more other program(s), the Technical Secretariat shall perform an analysis identifying the  
926 consistency of the existing PCR(s) against the criteria set in this Guidance and in the PEF Guide.  
927 Existing PCRs need to be evaluated only up to the point where a decision can be made whether they  
928 should be used as a basis for the development of a PEFCR or not. Only those PCRs identified as  
929 suitable basis for a PEFCR need to be evaluated further with the necessary detail.

930 If, based on the results of this analysis, the existing PCR is completely in line with the PEF  
931 requirements, the existing PCR shall be used as PEFCR for the same product category,  
932 complementing it with any additional elements as appropriate (e.g. additional environmental  
933 information). If there are a number of deviations, then the Technical Secretariat shall document the  
934 major differences in a report to be uploaded in the EF virtual consultation Forum. The PEFCR

---

<sup>8</sup> The term “PCR” used here comprise any set of specific rules or guidelines for a product category. It is not limited to the PCRs following the ISO 14025.

<sup>9</sup> For example a PCR repository exists at <http://pcr-library.edf.org.tw/index.asp>

935 development process will then adapt the existing PCR(s) and make the PCR(s) fully consistent with  
936 the PEF requirements and the requirements of this Guidance document<sup>10</sup>.

937 In particular, this alignment process needs to occur across the following principle elements: (1) data  
938 alignment, (2) the PEF and additional requirements for the generation of the PEFCR; and (3) PEFCR-  
939 related procedures.

940 (1) Data alignment. Data needs to fulfil requirements defined in chapter 7.19. This is both valid for  
941 primary data (rules on data collection) and secondary data. The specificities related to geographical  
942 areas, time representativeness, and technologies shall also be acknowledged and dealt with in the  
943 PEFCRs.

944 (2) Rule alignment. All rules for the existing PCRs shall be consistent with the PEF Guidance, for  
945 example specification of the functional unit, scope of the study, life cycle inventory, any allocation  
946 rules, impact assessment, specific modelling requirements (e.g. electricity, end of life), and rules for  
947 additional information.

948 (3) Procedural alignment. Requirements for PCR creation and review shall be equivalent, if not  
949 identical, to PEFCR requirements.

950 When a PCR exists for a product category in one or more other program(s), the other program  
951 operator(s) shall be contacted and invited by the Technical Secretariat to join the PEFCR  
952 development process.

## 953 **6.6 The process of developing a PEFCR**

954 The development of a PEFCR shall be based on an open and transparent consultation process  
955 involving all interested stakeholders. Reasonable efforts should be made to achieve a consensus  
956 throughout the process (ISO 14020:2000).

957 The inclusion of a virtual consultation and involvement process aids in ensuring that the opportunity  
958 exists for any and all stakeholders to contribute actively to the PEFCR development process or to  
959 provide comments regarding the PEFCR being developed, thus creating a development process  
960 which takes into account all relevant expertise with the utmost transparency.

### 961 **6.6.1 Timing of the process**

962 The PEFCRs shall be finalised (including the approval of the Steering Committee) by the 20<sup>th</sup> of April  
963 2018. PEFCRs shall be submitted to the Steering Committee for approval no later than the 19<sup>th</sup> of  
964 March 2018.

965 A final draft PEFCR missing one or more essential element (i.e. clear calculation rules, benchmark  
966 values, verification rules and, where appropriate and relevant, classes of performance) or including  
967 requirements in conflict with the PEF method or the latest version of this Guidance document, may  
968 not be put forward for the final approval of the Steering Committee.

---

<sup>10</sup> The adapted PEFCR should reference the original PCR and program.

## 969 6.6.2 The consultation process

970 The Commission published the list of all PEFCRs under development<sup>11</sup>.

971 Each Technical Secretariat shall identify and invite all the relevant stakeholders to participate in the  
972 PEFCR development by a virtual consultation process, and shall ensure that the role of the different  
973 stakeholders in the process is made clear and open to enable their participation.

974 Each Technical Secretariat shall create and maintain a log of those stakeholders that have been  
975 communicated with and responded to. A virtual consultation procedure shall be prepared in such a  
976 manner as to support the usage of an internet-based participatory process making use of the EF  
977 virtual consultation Forum.

978 An open internet-based consultation via the EF virtual consultation Forum serves the role of  
979 broadening the participation of stakeholders from different parts of the world. The use of the EF  
980 virtual consultation Forum also has the advantage that it facilitates participation from interested  
981 parties having difficulties to attend meetings, e.g. NGOs, SMEs, stakeholders from non-EU or  
982 developing countries and environmental groups.

983 Interested parties shall be given adequate time for review and access the details and sources of  
984 information used. The consultation process shall also ensure that interested parties, who provide  
985 comments, will receive consideration of, and response to, their comments. In particular the  
986 Technical Secretariat should, at the end of each consultation period and in any case before opening  
987 the final consultation step, produce and make public in the EF virtual consultation Forum, a  
988 document describing the major comments received and how they have been addressed.

989 Virtual consultations and the period for commenting on documents shall last at least 4 calendar  
990 weeks.

## 991 6.6.3 Representativeness of a PEFCR

992 A PEFCR is considered to be representative of a specific product category when all the following  
993 conditions are met:

- 994 1) The Technical Secretariat in charge of a specific product category has invited to contribute to  
995 the PEFCR development process all the major competitors, or their representatives (i.e. via  
996 industry associations) covering for at least 75% of the EU market (in terms of yearly turnover  
997 or production). All companies contributing to more than 10% to the EU market (in terms of  
998 yearly turnover or production) have been invited.
- 999 2) The industry stakeholders (producers/importers, either as single companies and/or as  
1000 business associations) participating to the whole process cover at least 51% of the EU  
1001 market (in terms of yearly turnover or production). The participation of stakeholders will be  
1002 judged on the basis of their inputs to the process and/or participation to meetings. The 51%  
1003 target has to be achieved by the end of the pilot phase. This means that it is not a  
1004 requirement for the Technical Secretariats themselves to fulfil.

---

<sup>11</sup> This information is available at: [http://ec.europa.eu/environment/eussd/smgp/product\\_footprint.htm](http://ec.europa.eu/environment/eussd/smgp/product_footprint.htm)

1005 3) The Technical secretariat has invited and involved in the PEFCR development process a wide  
 1006 range of stakeholders, with particular reference to SMEs, consumers' and environmental  
 1007 associations.


1008 In cases where all these conditions are not met by the time a final draft PEFCR is ready, the  
 1009 document will not be put forward to the final approval of the Steering Committee.

1010 **6.6.4 Structure of the PEFCR**

1011 The PEFCR shall follow the structure in Annex B to this guidance. Any deviation from the structure  
 1012 shall be justified and agreed with the Commission.

1013 **6.6.5 Procedure for the development of a PEFCR**

1014 There are a number of steps that shall be followed when preparing a PEFCR. Whilst the way to  
 1015 perform each step is under the technical responsibility of each Technical Secretariat, all steps shall  
 1016 be part of at least one consultation step with the relevant stakeholders.

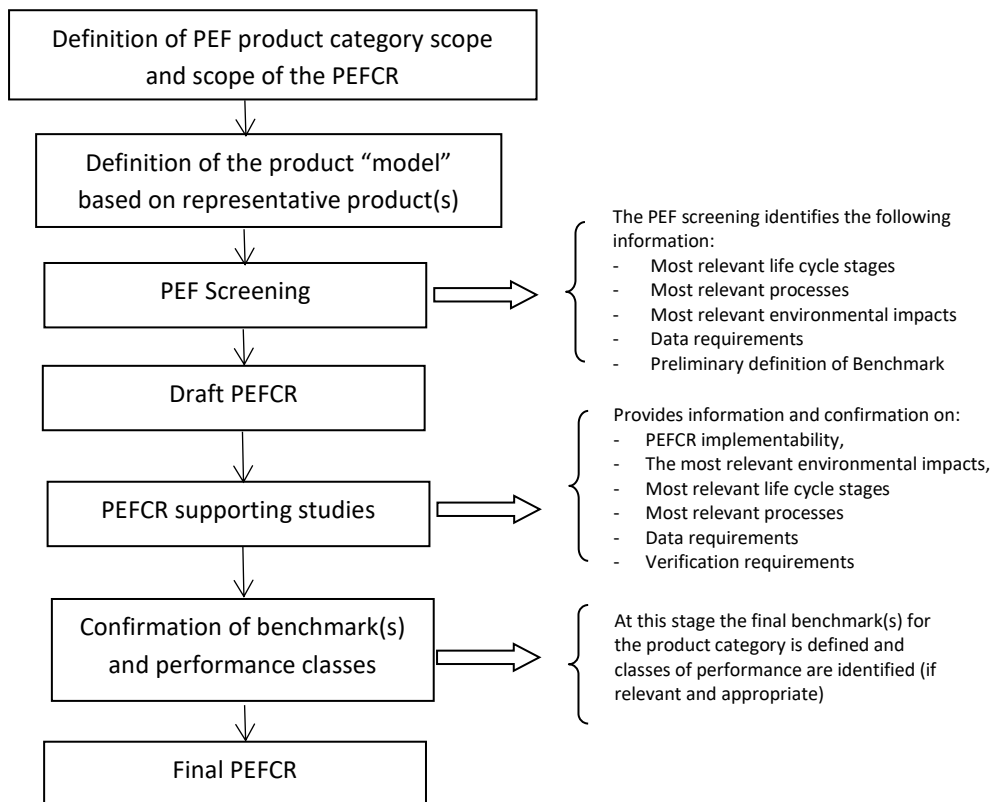

1017  
 1018 **Figure 3. Steps to be followed for the development of PEFCRs.**

1019 One PEF screening and at least one PEFCR supporting study shall be performed per each  
 1020 representative product(s)/sub-categories included in the PEFCR.

1021 **6.6.6 Product scope and classification**

1022 By similarity with what is stated in ISO 14025, a PEFCR shall include a product category definition  
 1023 and description. This should include a description of the product(s), the function of the product(s),



1024 unless it concerns intermediate product(s), and a description of the technical performance, the use  
1025 and EoL stage of the product(s) if known (see section 3). It is important to be as specific as possible  
1026 when defining a product category to ensure comparability of results. As recommended in ISO 14044,  
1027 if additional functions of any of the systems or if some products that fulfil the same function are not  
1028 taken into account in the comparison of the functional unit, then these omissions shall be explained  
1029 and documented.

1030 The PEFCR shall clearly state the product category for which the PEFCRs apply by using descriptive  
1031 language. Once the scope has been finalised the corresponding relevant CPA codes shall be listed.  
1032 Products that are not covered by the PEFCR shall be clearly listed (as a clarification when products  
1033 are similar). In some cases, accessory products that are typically sold together are not covered by  
1034 the PEFCR. This should also be stated.

1035 Products having similar functions and applications should be grouped under one product category.  
1036 However, within a single PEFCR sub-categories of products/applications can be identified. For  
1037 example, it could be appropriate to develop a PEFCR on batteries (wide scope) which then could  
1038 include a number of sub-categories linked to the different types of applications (batteries for cars,  
1039 batteries for mobile phones, batteries for computers, etc.).

1040 The basis for assigning a group of products to a product category shall be that the same functional  
1041 unit shall be applied across all the products that are to be categorized under one product category. A  
1042 declared unit, for example, mass (kilogram), volume (cubic meter), should be applied for  
1043 intermediate products, where a functional unit cannot be assigned due to the fact that the whole life  
1044 cycle of the product is either not accounted for or cannot be stated (i.e. cradle-to-gate). The use of a  
1045 declared unit might also be the most straightforward (but not necessarily the most correct) choice  
1046 when dealing with food products.

1047 Technical Secretariat shall choose one of the following options:

- 1048 A. The scope is limited, there is a single main application/function and all  
1049 products/technologies covered are very similar (e.g. liquid laundry detergents, packed  
1050 water) – see box 1.
- 1051 B. The scope is wide, there is a single main function but different  
1052 applications/technologies/materials (e.g. batteries, dairy products) – see box 2;
- 1053 C. The scope is relatively narrow, there is a single main function, but alternative  
1054 technologies/materials delivering the same function are available (e.g. hot & cold water pipe  
1055 systems, paints) – see box 3;


1056 The most relevant options shall be clearly indicated and justified in the scope section of the PEFCR  
1057 template. The proposed scope shall be discussed and agreed by the end of the first consultation  
1058 phase.

1059 Once the scope has been clearly identified the Technical Secretariat shall decide if more than one  
1060 sub-category is needed and if the functional unit shall be refined for the subcategories. If a single  
1061 functional unit is used, the benchmark (and classes of performance if relevant and appropriate) is  
1062 chosen at the functional unit level (see box 3). In case the PEFCR includes sub-categories with  
1063 appropriate functional unit, then the benchmark (and classes of performance if relevant and

1064 appropriate) can only be defined at the sub-category level (see box 2). In case there are no sub-  
1065 categories then the situation is more straightforward (see box 1).

1066 **Box 1 – PEFCR including one single product category.**

1067 When the scope is narrow and or the technologies delivering the function are all very similar, then it  
1068 is possible to use a single benchmark of the product category. In the context of the on-going EF pilot  
1069 phase this is for example the case of “liquid laundry detergents”.




1070

1071

1072 **Box 2 – PEFCR including more sub-categories for different applications.**

1073 When the scope of a PEFCR is wide it could be preferable to identify sub-categories based on  
1074 different applications. In the context of the on-going EF pilot phase this is, for example, the case of  
1075 “battery” products, which all provide electricity but for very distinct applications varying from  
1076 electro-bicycles to mobile phones. The screening shall be carried out on each technology option. The  
1077 results of the screening identify the hotspots (in terms of life cycle stages, process, elementary  
1078 flows) and provide the first element to identify the benchmark. In such cases the benchmark shall be  
1079 fixed with reference each subcategory/application.

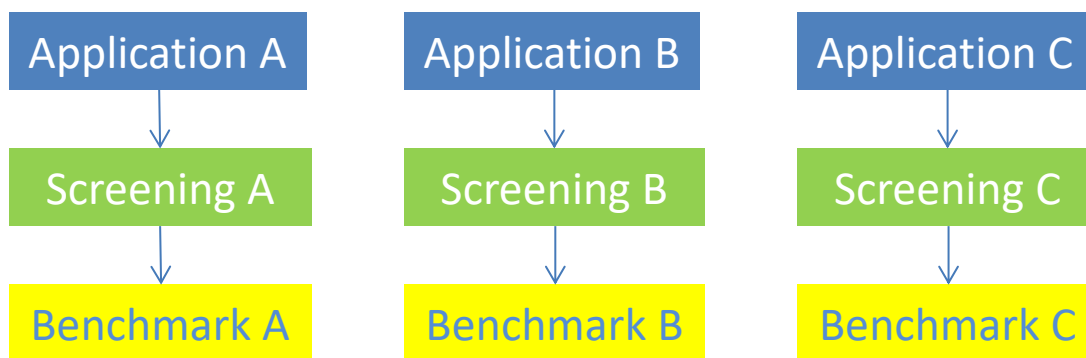


1080

1081

1082 **Box 3 – PEFCR including more sub-categories but the same function/application.**

1083 There are product categories where it is possible to identify the same function delivered by very  
1084 different products/technologies. In the context of the on-going EF pilot phase this is for example the  
1085 case of “hot & cold water pipe systems”. The screening shall be carried out on each technology  
1086 option. The results of the screening identify the hotspots (in terms of life cycle stages, process, and  
1087 elementary flows) and provide the first element to identify the benchmark. In such cases the  
1088 benchmark might be fixed with reference to the functional unit (same function performed by each

1089 technology). Alternatively, the Technical Secretariat might decide to define the benchmark for each  
1090 sub-category part of the PEFCR.

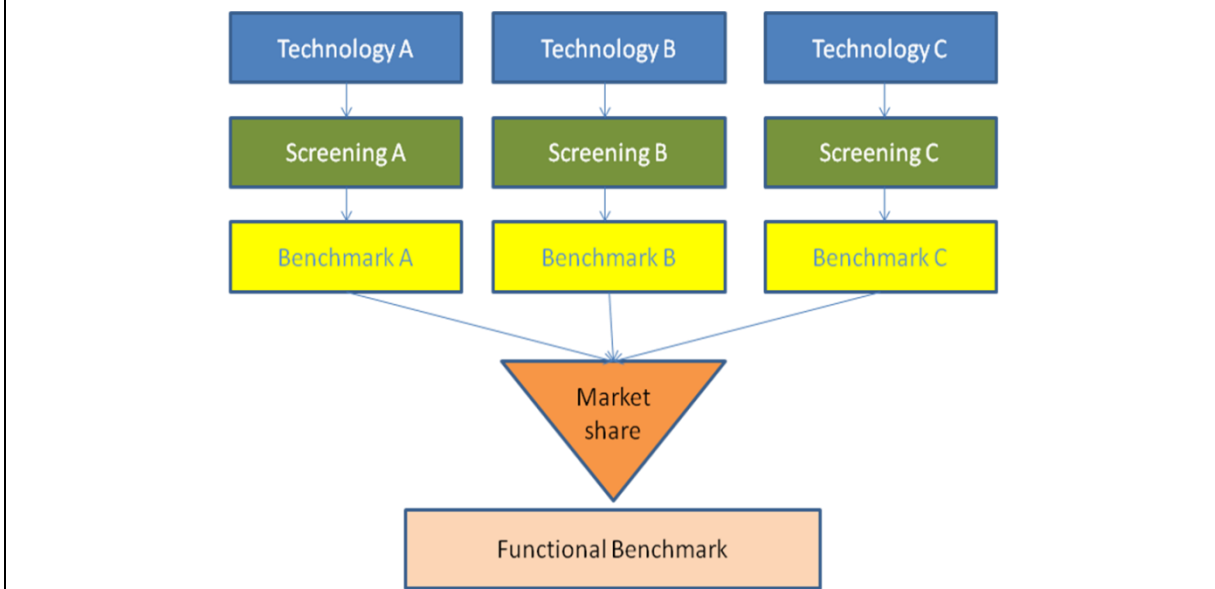

1091

1092

### 1093 6.6.7 The PEF screening

1094 The PEF screening is necessary because it helps focussing data collection activities and data quality  
1095 priorities for the PEFCR supporting study. The screening shall be carried out by the Technical  
1096 Secretariat based on the “representative product” and in compliance with the procedure in chapter  
1097 7.4.

1098 The objective of the screening is to pre-identify the following key information:

- 1099 • Most relevant life cycle stages;
- 1100 • Most relevant processes and elementary flows;
- 1101 • Preliminary indication about the most relevant life cycle impact categories;
- 1102 • Data quality needs;
- 1103 • Preliminary indication about the definition of the benchmark for the product category/sub-  
1104 categories in scope.

1105

1106 The Technical Secretariat is encouraged to also perform the screening study by using top-down  
1107 approaches, like for example Environmentally Extended Input Output (EEIO). In such cases, or for  
1108 any alternative approach for screening proposed by the Technical Secretariat, a screening study shall  
1109 also be done with the baseline approach as described in the PEF Guide) and the results of the two  
1110 studies shall be compared.

1111 The PEF screening can be based on readily available generic data (life cycle inventory databases, e.g.  
1112 from commercial databases) fulfilling the data quality requirements as defined in the most updated  
1113 version of the PEF Guide. In particular, for the screening step a minimum “fair” quality data rating is

1114 required for data contributing to at least 90% of the impact estimated for each EF impact category,  
1115 as assessed via a qualitative expert judgement. In an iterative approach with communication and  
1116 feedback from the Technical Secretariat to all the participating stakeholders, the accuracy and  
1117 representativeness of the model and data shall be improved. The model can be adjusted by  
1118 introducing new processes/activities to be included. Generic data used in the first round can be  
1119 replaced with specific data and other more representative (specific) databases along the process.

1120 The results of the screening should be subject to sensitivity analysis and be also part of the PEFCR  
1121 review process.

## 1122 **6.6.8 The screening report**

1123 Each Technical Secretariat shall send for review to the Commission a screening report and the  
1124 “model” developed through an LCA software. The objective of this review is to support the work of  
1125 the Technical Secretariats helping them to identify at an early stage any deviation from the  
1126 requirements of included in the PEF Guide or in the most updated version of this PEFCR Guidance  
1127 document.

1128 The screening report shall contain following information:

- 1129 • Definition of the functional unit and reference flow;
- 1130 • Flow diagram for each life cycle stage with a clear link between all processes involved and  
1131 one global system boundary diagram;
- 1132 • Identification of the foreground and background data;
- 1133 • For each life cycle stage, a table with all processes involved with a clear identification of the  
1134 source of the Life Cycle Inventory and calculation of the reference flow for each process ;
- 1135 • Assumption about the use, re-use (if appropriate) and end-of-life scenario including the way  
1136 the EoL formula is applied;
- 1137 • Treatment of any multi-functionality issues encountered in the PEF modelling activity;
- 1138 • Results of the sensitivity analysis with a clear identification of the minimum-maximum  
1139 values used to perform it;
- 1140 • Results for each EF impact category with a split per life cycle stage.

1141 In case the Commission identifies any relevant issue, it will address them bilaterally with the  
1142 concerned Technical Secretariat. If there are divergent opinions that cannot be reconciled, the issue  
1143 will be raised at Technical Advisory Board level and, if necessary at Steering Committee level.

1144 The detailed screening report shall be considered confidential by the Commission, thus it will be  
1145 shared only within the Commission EF Teams and any reviewer contracted to support this task.

1146 The decision from a Technical Secretariat not to produce such report or to produce incomplete  
1147 reports would imply the application of chapter 6.7.

1148 The software model used for the screening should be released by each TS to the Commission and  
1149 remain freely accessible to any user also after the pilot phase is concluded. The Commission services  
1150 will update the models by recalculating the results (including the benchmarks) based on the PEF-  
1151 compliant secondary datasets that will be tendered in the last part of the pilot phase (re-modelling).

### 1152 **6.6.9 The draft PEFCR**

1153 Based on the results of the PEF screening and the related consultation, the Technical Secretariat  
1154 shall produce a draft PEFCR.

1155 The draft PEFCR is the guiding document to carry out the PEFCR supporting studies. It shall be  
1156 drafted according to the requirements included in the PEF Guide and the Template provided for this  
1157 purpose.

1158 In the draft PEFCR all impact categories shall be included (and therefore used in the PEFCR  
1159 supporting study). The draft PEFCR shall be revised based on the results of the PEFCR supporting  
1160 studies.

### 1161 **6.6.10 Documents to be submitted to the first consultation**

1162 The documents to be submitted to the first consultation are:

- 1163 • PEF screening report, and
- 1164 • First draft PEFCR (no data sources specified)

1165 The PEF screening report, apart from the quantification of the screening results, shall include the  
1166 following information:

- 1167 • description of the supply chain (processes) and scenarios (upstream, downstream,  
1168 transport),
- 1169 • results of the sensitivity analysis on allocation options,
- 1170 • where and why generic data are to be preferred to specific data in the foreground system (if  
1171 relevant),
- 1172 • the environmental impact category selection process,
- 1173 • additional environmental information (if needed),
- 1174 • data gaps,
- 1175 • life cycle inventories and characterised results for the representative product (for each  
1176 impact category and life cycle stage).

1177 After the approval of the document by the Steering Committee, the Technical Secretariat shall  
1178 upload on the Stakeholder Workspace of the EF Wiki a table analysing the results of the consultation  
1179 (comments received and how they have been dealt with).

### 1180 **6.6.11 The PEFCR supporting studies**

1181 The Technical Secretariat shall encourage the participants/stakeholders to carry out at least 3 PEF  
1182 studies (and at least one for each sub-category covered by the PEFCR) compliant with the latest  
1183 version available of the PEF Guide, the latest version available of this Guidance at the time of  
1184 starting the supporting study, and with any specific requirement included in the draft PEFCR<sup>12</sup>,  
1185 comprising however all environmental impact categories and having a full coverage in terms of life

---

<sup>12</sup> In case of conflicting requirements between the PEF Guide and this Guidance, the latter prevails over the former.

1186 cycle stages and processes. These studies are referred hereafter as PEFCR supporting studies. They  
1187 shall be based on existing products as currently sold in the European market. A template that should  
1188 be followed for PEFCR supporting studies is available in Annex E. Even if the template is not  
1189 followed, the PEFCR supporting study shall include all content included in the Annex E template.

1190 PEFCR supporting studies as well as PEF studies based on a PEFCR shall contain a reference to the  
1191 PEFCR or the version of the related EF Guidance that they comply with.

1192 The goal of the PEFCR supporting studies shall clearly state that it is done as supporting evidence to  
1193 the PEFCR development and the intended audience. The studies should always be done under the  
1194 assumption that their result would be used to contribute to the development of a PEFCR that could  
1195 support comparisons or comparative assertions intended to be disclosed to the public.

1196 The PEFCR supporting studies will be used to test the pertinence and implementability of the draft  
1197 PEFCR including, but not limited to, the identified most relevant environmental impacts, issues  
1198 related to data collection and quality, verification requirements. For this reason, each PEFCR  
1199 supporting study shall implement the procedures explained in chapters 7.4 and 7.19<sup>13</sup>. Moreover,  
1200 the uncertainty analysis carried out on the results of the PEFCR supporting studies may contribute to  
1201 the identification of appropriate performance classes (where relevant and appropriate).

1202 The results of the supporting study (including confidential information) will be accessed only by the  
1203 external verifiers, the PEFCR reviewers, and the EF Team in DG ENV and JRC IES. Otherwise it shall  
1204 remain confidential, unless differently agreed by the company performing the study. The company  
1205 performing the study can grant access to other stakeholders upon request.

1206 Beside the confidential report (template in Annex E in its full version), a second report shall be  
1207 produced that describes the main outcomes of the PEFCR supporting study without disclosing  
1208 confidential information. For this, chapter 5.1 and 9 of the template can be removed from the  
1209 report, while chapter 6 on the results can be replaced by a non-confidential summary. This second  
1210 report will be made available to the Technical Secretariat, the Technical Advisory Board and the  
1211 Steering Committee.

1212 The second report (without confidential information) or a condensed version thereof can be used in  
1213 the communication phase. For example, report or background information to a label.

1214 The information included in the supporting study reports shall only be used for activities related to  
1215 the implementation of the EF pilot phase in the period 2013-2018.

#### 1216 ***6.6.11.1 Identification of the most relevant impact categories***

1217 The identification of the most relevant impact categories shall be done according to the procedure  
1218 explained in chapter 7.4.

---

<sup>13</sup> The implementation of the procedure in Annex E shall be guaranteed in at least 1 supporting study per pilot.

#### 1219 **6.6.12 Disclosure and communication**

1220 The references to communication included in this section are only valid during the environmental  
1221 footprint pilot phase (2013-2018) and as part of the tests carried out by the pilots and the  
1222 Commission on different communication vehicles.

1223 The results of a PEF study carried out in compliance with the PEF Guide or, where existing, with a  
1224 specific PEFCR, are called “PEF-Profile”. Whenever a PEFCR exists for a certain product category,  
1225 then its requirements shall be fulfilled if the information included in the PEF-profile is meant to be  
1226 used for communication purposes.

1227 Each PEFCR shall specify the minimum list of processes that shall be covered by company-specific  
1228 data. The purpose is to avoid that an applicant without access to any primary data is able to perform  
1229 a PEF study and communicate its results by only applying default datasets. Each PEFCR shall define  
1230 what is mandatory based on the relevance and the possibility to have access to primary data.

1231 The PEF-profile could be communicated in different forms, depending on the typology of  
1232 communication (B2B or B2C) and the objective of the communication. A description of some  
1233 communication vehicles (non-exhaustive list) is provided in the background document for the testing  
1234 of communication vehicles in the Environmental Footprint pilot phase<sup>14</sup>.

1235 For final products the pilots shall communicate at least on 3 impact categories among those  
1236 identified in the PEFCR as “most relevant”.

1237 For intermediate products the pilots shall communicate on all impact categories identified in the  
1238 PEFCR as “most relevant”.

1239 Independently from the vehicle chosen, when environmental footprint information is used for  
1240 communication purposes, the results for all impact categories (characterised, normalised, and  
1241 weighted) shall be available to the public through freely accessible information sources (e.g.  
1242 website).

1243 The chosen communication vehicles shall be tested at least by the companies carrying out the PEFCR  
1244 supporting studies during the last phase of the pilot phase. The testing may be organised  
1245 horizontally by the Technical Secretariat. The length of the testing period should be proportionate to  
1246 the approach used. For a brick-and-mortar (real market) test it is suggested to run the test for at  
1247 least 6 months. For focus groups or online tests a duration of 2-3 months is considered sufficient.

1248 Communication shall be tested when the results of the supporting studies are available. More details  
1249 about this element are available in the background document for the testing of communication  
1250 vehicles in the Environmental Footprint pilot phase.

#### 1251 **6.6.13 Verification of the PEFCR supporting studies**

1252 The PEFCR review and the independent verification of the supporting studies are two separate  
1253 processes (for the PEFCR review see chapter 6.6.16).

---

<sup>14</sup> [http://ec.europa.eu/environment/eussd/smgp/pdf/Comm\\_bgdoc\\_v1.1.pdf](http://ec.europa.eu/environment/eussd/smgp/pdf/Comm_bgdoc_v1.1.pdf)

1254 The verification of the PEFCR supporting studies will be conducted before their public release. Due  
1255 to limited resources available (the costs of the verifiers will be covered by the Commission), only  
1256 about 1/3 of all supporting studies will be the object of verification. At least 1 PEFCR supporting  
1257 study per each pilot will be verified. It will be the Commission to decide which supporting study will  
1258 be verified, and inform the companies concerned directly.

1259 The verifications will take place in several ways, for example by on-site checking, reviewing  
1260 calculations, mass balance calculations, or cross-checks with other sources. Different approaches will  
1261 be tested in order to identify the optimal balance between completeness of verification and costs.

1262 The objectives of the verification are:

- 1263 • To assess compliance of the PEFCR supporting study and its results with the PEF Guide, the  
1264 latest version of this Guidance at the time when the supporting study was started, and the  
1265 reference PEFCR;
- 1266 • To verify the traceability and validity of the information/data, both primary data of the  
1267 organisation carrying out the study or of its suppliers, and other forms of secondary data  
1268 used in the supporting studies. This task might involve cross-check comparison of documents  
1269 (e.g. invoices, bills of sale, etc.) both provided by the organisation producing the PEF profile  
1270 and the suppliers. For the most relevant data it might also be required to perform on-site  
1271 document checks and inspections at the place where the supplier is located.
- 1272 • The presentation of environmental performance included in the PEF profile;
- 1273 • Other additional environmental information included in the PEF profile, if any.

1274 In verifying the underlying data of the life cycle inventory, the verifier will examine that:

- 1275 • The unit processes are defined as specified in the reference PEFCR;
- 1276 • The source of input and output data (that is, referenced literature, vendor-supplied  
1277 databases, and LCI databases) used for a unit process/module of specified unit processes are  
1278 at least of the quality requested in the reference PEFCR;
- 1279 • All relevant information is documented for each unit process, i.e. being consistent and  
1280 understandable to enable an independent evaluation of the relevance of the data in  
1281 accordance to the reference PEFCR. In particular the verifier should check that any  
1282 additional documentation of the LCA process data (sources, correspondence, traceable  
1283 references to origin, and so forth) is provided, especially if this information influenced LCA  
1284 process data selection;
- 1285 • The Data Quality Requirements are met.

1286 In case of existence of secondary data in the results which have been already verified according to  
1287 rules in the PEF Guide, these shall not be subject for further verification regarding the criteria  
1288 methodological consistency, completeness and uncertainty. However, the appropriateness of the  
1289 use of these data for the specific product needs to be verified. This verifications needs to cover the  
1290 aspects of time, geographical and technological representativeness of the secondary data for the use  
1291 in the specific PEF profile.



1292 In verifying the results from the impact assessment, the verifier shall check that the calculations are  
1293 made in a correct way based on the life cycle inventory and recommended characterisation,  
1294 normalisation and weighting factors.

1295 With regard to checking information of the life cycle inventory, the verifier shall make use of sample  
1296 checks for the unit processes/information modules/PEFCR modules to check their conformance to  
1297 original data sources. The organisation shall provide the verifier with information about the  
1298 underlying data and calculations carried out upon request.

1299 Sample checks may preferably be carried out for those unit processes/information modules/PEFCR  
1300 modules having a significant influence on the life cycle inventory, and randomly chosen unit  
1301 processes/information modules/PEFCR modules.

1302 When a large variety of products (e.g. series of products) are subject for verification, sampling  
1303 methods for the LCA study shall be used. If a specific sampling method has been developed by an  
1304 organisation, this method shall be verified by a third party verifier and specified in the PEF profile.

1305 The results of the preparatory study on this issue<sup>15</sup> and the details of the verification approaches  
1306 tested during the EF pilot phase are available here<sup>16</sup>.

#### 1307 **6.6.14 Competences of the verifier**

1308 Please refer to the PEF Guide, section 9.3. During the EF pilot phase, the verifier qualifications shall  
1309 be considered as indicative only.

#### 1310 **6.6.15 Time validity of the PEFCR**

1311 The validity of any PEFCR developed during the pilot phase is 31<sup>st</sup> December 2020.

#### 1312 **6.6.16 The PEFCR review**

1313 The Technical Secretariat shall set up an independent third party review panel composed of a  
1314 minimum of three members (i.e., a chair and two members) for the PEFCR review. The panel should  
1315 comprise of at least one LCA expert (preferably with a background on the product category under  
1316 consideration and product-related environmental aspects), one representative from NGOs, and one  
1317 industry expert. One member shall be selected as the chair. The panel members shall not have  
1318 conflicts of interests on branded products and cannot be members of the Technical Secretariat.

##### 1319 **6.6.16.1 Reviewer qualifications**

1320 Please refer to the PEF Guide, section 9.3. During the EF pilot phase, the reviewer qualifications shall  
1321 be considered as indicative only.

##### 1322 **6.6.16.2 Procedure for review**

1323 With the assistance of the Technical Secretariat, the PEFCR Review Panel shall meet to discuss the  
1324 PEFCR and perform its review. Comments shall be generated and may be general, editorial or

---

<sup>15</sup> *Investigating options for different compliance systems for PEF and OEF declarations,*  
[http://ec.europa.eu/environment/eussd/smgp/pdf/Compliance\\_finalreport.pdf](http://ec.europa.eu/environment/eussd/smgp/pdf/Compliance_finalreport.pdf)

<sup>16</sup> [http://ec.europa.eu/environment/eussd/smgp/ef\\_pilots.htm#verification](http://ec.europa.eu/environment/eussd/smgp/ef_pilots.htm#verification)

1325 technical. The general comments apply to overarching issues affecting the entire PEFCR whereas  
1326 editorial and technical comments may apply to specific sections within the PEFCR.

1327 Within a time period agreed upon by the PEFCR Review Panel and the Technical Secretariat not to  
1328 exceed 30 days, the PEFCR Review panel shall meet to generate their comments that are compiled in  
1329 the Review Report.

1330 The Review Report shall be sent to the Technical Secretariat for their review and discussion. A copy  
1331 of the report shall also be sent to the PEF Pilot Steering Committee.

### 1332 **6.6.16.3 Review criteria**

1333 The reviewers shall investigate whether the PEFCR has been developed in accordance with the  
1334 requirement provided in this Guidance and supports creation of credible and consistent PEF profiles.  
1335 In addition, the following criteria shall also apply:

- 1336 • The PEFCR is consistent with the guidelines provided in the PEF Guide and the latest version  
1337 available of this Guidance and deviations are justified,
- 1338 • Functional unit, allocation and calculation rules are adequate for the product category under  
1339 consideration,
- 1340 • Primary and secondary datasets used in the screening and the supporting studies are  
1341 relevant, representative, and reliable,
- 1342 • Selected LCIA indicators and additional environmental information are appropriate for the  
1343 product category under consideration and the selection is done in accordance with the  
1344 guidelines stated in this Guidance and the PEF Guide,
- 1345 • The benchmark and performance classes are correctly defined or the lack of performance  
1346 classes is appropriately justified
- 1347 • Both LCA-based data and the additional environmental information prescribed by the PEFCR  
1348 give a description of the significant environmental aspects associated with the product.

### 1349 **6.6.16.4 Review report**

1350 A review report should be drafted based on all the comments made by the review panel with  
1351 proposal for changes.

### 1352 **6.6.16.5 Addressing reviewers' comments**

1353 The Technical Secretariat shall review the PEFCR Review Panel's comments/proposals and develop a  
1354 response for each. Using the PEFCR Review Report, the Technical Secretariat generates responses  
1355 that may include:

- 1356 • Acceptance of the proposal: change draft PEFCR to reflect proposal,
- 1357 • Acceptance of the proposal: change draft PEFCR with modification to original proposal,
- 1358 • Supporting commentary why the Technical Secretariat did not agree with the proposal,
- 1359 • Return to PEFCR Review Panel with further questions on the comments/proposals.

1360 If any response by the Technical Secretariat is not accepted by the PEFCR Review Panel, then the  
1361 review panel report and the response of the Technical Secretariat shall be sent to the PEF Pilot  
1362 Technical Advisory Board and to the Steering Committee and the issues will be resolved at that level.

1363 **6.6.17 Documents to be drafted before the final consultation**

1364 The Technical Secretariat shall submit the final draft of the PEFCR into the final consultation. This  
1365 document should be drafted according to the template provided in Annex B.

1366 The PEFCR shall be complete, with the exception of the following elements:

- 1367
- PEF-compliant dataset(s) of the representative product(s) as modelled in the screening and  
1368 eventually modified based on the supporting studies results<sup>17</sup>. The datasets will be provided  
1369 in the context of the remodelling project, tendered by the European Commission and shall  
1370 be ready for the final PEFCR.
  - Final list of secondary datasets to be used by the applicant. These will be available for the  
1371 final PEFCR.  
1372

1373 A table or report with changes based on the final consultation and the PEFCR review shall be  
1374 included for the Technical Advisory Board and Steering Committee to prepare the examination of  
1375 the documents.

1376 After the approval of the document by the Steering Committee, the Technical Secretariat shall  
1377 upload on the Stakeholder Workspace of the EF wiki a table analysing the results of the final  
1378 consultation (comments received and how they have been dealt with).

1379 **6.6.18 Documents to be drafted before final approval by the SC**

1380 The PEFCR shall contain all elements required in the template in Annex B.

1381 Furthermore, an EF-compliant dataset (aggregated and disaggregated) for each Representative  
1382 Product shall be available.

1383 **6.7 Conditions to close a pilot**

1384 A pilot can be closed due to one of the following circumstances:

- 1385
- a) It becomes evident during the process that the representativeness conditions (see 6.6.3) will  
1386 not be achievable. In this case the decision to stop the pilot is taken by the Commission  
1387 without further consultation with the Steering Committee.
  - b) In case relevant deviations from the methodological mandatory requirements foreseen in  
1388 the PEF Guide or the most updated version of this Guidance document are identified by the  
1389 Commission and not solved through a bilateral dialogue with the relevant pilots. In this case  
1390 the Commission can propose to the Steering Committee to stop the work of the pilot till the  
1391 requirements are met.  
1392

1393

---

<sup>17</sup> The dataset(s) developed for each representative product(s) shall be available for free to any user till 31st December 2020 and distributed through a specific node created by the EC in the ELCD Data Network.

1394

# 7 Technical specifications

1395

## 7.1 Functional unit and reference flow

1396

The functional unit (FU) is the quantified performance of a product system, to be used as a reference unit (e.g., the FU of paint could be described as providing protection of 1m<sup>2</sup> of substrate for 50 years with a minimum 98% opacity). Meaningful comparisons shall only be made when products can fulfil the same function. Therefore, the FU of a PEFCR should describe qualitatively and quantitatively the function(s) and duration of the product, according to the four aspects reported in Table 1. The table includes additional requirements for food and non-food PEFCRs that shall be adopted by the respective PEFCRs.

1397

1398

1399

1400

1401

1402

1403

**Table 1. Four aspects of the FU with additional requirements for food and non-food PEFCRs.**

Elements of the FU	Food products	Non-food products
1. The function(s)/service(s) provided: <b>“what”</b>	The FU shall be measured at product consumption level and should exclude inedible parts <sup>18</sup> .	PEFCR specific
2. The extent of the function or service: <b>“how much”</b>	The FU shall be mass or volume based. Any derogation shall be discussed and approved on a case by case basis by the EC.	PEFCR specific
3. The expected level of quality: <b>“how well”</b>	The <i>“How well”</i> feature is not always sufficiently taken into account so far. This item requires future developments	Not always possible to incorporate: Requires further developments
4. The duration/life time of the product: <b>“how long”</b>	Shall be quantified if shelf-life (reported for example as “best before date” or “use by date”) is indicated on the packaging (e.g. number of months)	Shall be quantified if technical standards or agreed procedures at sectoral level exist

1404

The PEFCR shall explain and document any omission of the functions of the product in the definition of the functional unit.

1405

1406

For intermediate products, the FU is more difficult to define because they can often fulfil multiple functions and the whole life cycle of the product is not known. Therefore, a declared unit should be applied, for example, mass (kilogram) or volume (cubic meter).

1407

1408

1409

The PEFCR shall describe (i) how each aspect of the functional unit can affect the environmental footprint of the product, (ii) how to include this effect in the EF calculations and (iii) how an

1410

<sup>18</sup> The term ‘inedible parts’ shall be defined by the TS in the PEFCR.

1411 appropriate reference flow<sup>19</sup> shall be calculated. In case applicable standards exist when defining the  
1412 FU, they shall be used and cited in the PEFCR.

1413 For example, the type of packaging might affect the amount of salad wasted at retail and at the use  
1414 stage. As a consequence, the type of packaging affects the amount of salad which is needed to fulfil  
1415 the “how long” and “how much” described in the FU. The PEFCR shall describe the potential effects  
1416 of food waste and provide a table with the % of salad waste per packaging type applied. Finally, the  
1417 PEFCR shall describe how the % of salad waste from the table is integrated in the reference flow and  
1418 added to the FU of 1kg of salad consumed. All quantitative input and output data collected in the  
1419 analysis shall be calculated in relation to this reference flow of 1kg+x% waste.

## 1420 **7.2 How to define the representative product(s)**

1421 Once the scope and the functional unit of the PEFCR has been agreed, the Technical Secretariat (TS)  
1422 shall develop a “model” of the representative product (RP) sold in the EU market and belonging to  
1423 the product category at hand.

1424 At least one RP shall be defined for each PEFCR as it forms the basis for the modelling of the PEF  
1425 screening. When within a product category several different applications are supported, multiple  
1426 RPs may need to be identified. When defining the “representative product” model, the TS should  
1427 include the following elements to the extent possible:

- 1428 ● Bill of materials (BoM) or ingredients, as relevant;
- 1429 ● A flow diagram (system boundary) covering the entire life cycle;
- 1430 ● Assumptions related to transportation systems;
- 1431 ● Assumptions related to use scenario (if relevant);
- 1432 ● Assumptions related to End-of-Life scenario, including recycling and recovery as relevant.

1433 When modelling the representative product, the TS shall use processes disaggregated at level-1. The  
1434 RP(s) should be established at a level where it enables a meaningful comparison between products  
1435 delivering the same function. For B2C scenario, the RP(s) should be established in order to enable  
1436 informed consumer choice, i.e., to capture the differences between products within the same  
1437 product category.

1438 The RP(s) as the basis of the PEF screening study aims at:

- 1439 1. Identifying the most relevant impact categories, life cycle stages, processes and direct  
1440 elementary flows;
- 1441 2. Facilitating the comparison between products that fall within the same RP;
- 1442 3. Calculate the benchmarks (the EF-profile of a representative product is the benchmark)
- 1443 4. Define the classes of performance (if appropriate).

1444 There are two options for defining the representative product(s):

- 1445 1. It could be a virtual (non-existing) product. This is probably the best option when the market  
1446 is made up of different technologies/materials and there is sufficient market and technical

---

<sup>19</sup> The reference flow is the amount of product needed to fulfil the defined functional unit.

1447 information available. The virtual product shall be calculated based on average sales-  
1448 weighted characteristics of all existing technologies/materials covered by the scope of the  
1449 PEFCR. In addition to the sales-weighted average, other weighting sets may be used, for  
1450 example weighted average based on mass (ton of material) or weighted average based on  
1451 product units (pieces);

1452 2. It could be a real product. This is probably the best option when the market is made up of  
1453 different technologies, but incomplete market and/or technical information are available. A  
1454 real product sold at EU market level may be chosen as representative product.

1455 The TS shall provide information about all the steps taken to define the “representative product”  
1456 model(s) in the screening study and report the information gathered taking the most appropriate  
1457 measure to preserve the confidentiality of data (if this is required).

1458 Business data, gathered during the PEFCR development, could be of confidential nature because of  
1459 competitive business aspects, intellectual property rights or similar legal restrictions. Such  
1460 confidential data shall not be made public under any circumstances; this is under the full  
1461 responsibility of the TS.

1462 The "representative product(s)" shall be presented and discussed with the relevant stakeholders.  
1463 The model and the modelling assumptions are the basis for the screening exercise which provides  
1464 insight into the relevant life cycle stages, processes and impact categories of the product category  
1465 (including the identification of processes for which primary data are requested).

1466 **7.3 List of EF impact categories, normalisation factors and weighting factors**

1467 The PEFCR shall list the 16 impact categories to be used to calculate the PEF profile, as listed in Table 2. Out  
 1468 of these 16 impact categories, the PEFCR shall list those that are most relevant for the product group in  
 1469 scope (see next chapter).

1470 The three toxicity-related impact categories are temporarily excluded from the procedure to identify the  
 1471 most relevant impact categories, life cycle stages, processes and elementary flows. Also, their  
 1472 characterised results shall not be presented in the benchmark values of the PEFCR. This decision will be  
 1473 reconsidered at the end of the transition phase (2020), after the finalisation of the ongoing work done in  
 1474 collaboration between the Commission and ECHA agency in Helsinki on developing new CF based with  
 1475 REACH data. A PEF study carried out in compliance with a PEFCR shall still calculate and include in the PEF  
 1476 report the characterised results for the three toxicity impact categories, but these results shall not be used  
 1477 for other communication purposes and are not taken into consideration in the benchmark and for the  
 1478 identification of the most relevant life cycle stages, processes, and foreground direct elementary flows. If  
 1479 the TS decides to add toxicity as a most relevant IC and present toxicity related impact results in their  
 1480 PEFCR, this shall be done in an additional chapter named "Other impact results" (see PEFCR template) and  
 1481 the existing limitations of the underlying method shall be clearly mentioned.

1482

1483 **Table 2. List of recommended models at midpoint, together with their indicator, unit and source. In red text: the**  
 1484 **differences compared to the PEF guide (2013)**

Recommendation at midpoint					
Impact category	Indicator	Unit	Recommended default LCIA method	Source of CFs	Robustness
Climate change <sup>20</sup>	Radiative forcing as Global Warming Potential (GWP100)	kg CO <sub>2</sub> eq	Baseline model of 100 years of the IPCC (based on IPCC 2013)	EC-JRC, 2017 <sup>21</sup>	I
Ozone depletion	Ozone Depletion Potential (ODP)	kg CFC-11 eq	Steady-state ODPs as in (WMO 1999)	EC-JRC, 2017	I
Human toxicity, cancer*	Comparative Toxic Unit for humans (CTU <sub>h</sub> )	CTU <sub>h</sub>	USEtox model (Rosenbaum et al, 2008)	EC-JRC, 2017	III/interim
Human toxicity, non-cancer*	Comparative Toxic Unit for humans (CTU <sub>h</sub> )	CTU <sub>h</sub>	USEtox model (Rosenbaum	EC-JRC,	III/interim

<sup>20</sup> Three additional sub-indicators may be requested for reporting, depending on the PEFCR. The sub-indicators are further described in section 7.9.

<sup>21</sup> The full list of characterization factors (EC-JRC, 2017a) is available at this link <http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>

Recommendation at midpoint					
Impact category	Indicator	Unit	Recommended default LCIA method	Source of CFs	Robustness
			et al, 2008)	2017	
<b>Particulate matter</b>	<b>Impact on human health</b>	disease incidence	<b>PM method recommended by UNEP (UNEP 2016)</b>	<b>EC-JRC, 2017</b>	<b>I</b>
<b>Ionising radiation, human health</b>	Human exposure efficiency relative to U <sup>235</sup>	kBq U <sup>235</sup> <sub>eq</sub>	Human health effect model as developed by Dreicer et al. 1995 (Frischknecht et al, 2000)	<b>EC-JRC, 2017</b>	II
<b>Photochemical ozone formation, human health</b>	Tropospheric ozone concentration increase	kg NMVOC <sub>eq</sub>	LOTOS-EUROS model (Van Zelm et al, 2008) as implemented in ReCiPe 2008	<b>EC-JRC, 2017</b>	II
<b>Acidification</b>	Accumulated Exceedance (AE)	mol H <sup>+</sup> <sub>eq</sub>	Accumulated Exceedance (Seppälä et al. 2006, Posch et al, 2008)	<b>EC-JRC, 2017</b>	II
<b>Eutrophication, terrestrial</b>	Accumulated Exceedance (AE)	mol N <sub>eq</sub>	Accumulated Exceedance (Seppälä et al. 2006, Posch et al, 2008)	<b>EC-JRC, 2017</b>	II
<b>Eutrophication, freshwater</b>	Fraction of nutrients reaching freshwater end compartment (P)	kg P <sub>eq</sub>	EUTREND model (Struijs et al, 2009) as implemented in ReCiPe	<b>EC-JRC, 2017</b>	II
<b>Eutrophication, marine</b>	Fraction of nutrients reaching marine end compartment (N)	kg N <sub>eq</sub>	EUTREND model (Struijs et al, 2009) as implemented in ReCiPe	<b>EC-JRC, 2017</b>	II
<b>Ecotoxicity, freshwater*</b>	Comparative Toxic Unit for ecosystems (CTU <sub>e</sub> )	CTU <sub>e</sub>	USEtox model, (Rosenbaum et al, 2008)	<b>EC-JRC, 2017</b>	III/interim



Recommendation at midpoint					
Impact category	Indicator	Unit	Recommended default LCIA method	Source of CFs	Robustness
<b>Land use</b>	<ul style="list-style-type: none"> <li>• Soil quality index<sup>22</sup></li> <li>• Biotic production</li> <li>• Erosion resistance</li> <li>• Mechanical filtration</li> <li>• Groundwater replenishment</li> </ul>	<ul style="list-style-type: none"> <li>• Dimensionless (pt)</li> <li>• kg biotic production</li> <li>• kg soil</li> <li>• m<sup>3</sup> water</li> <li>• m<sup>3</sup> groundwater</li> </ul>	Soil quality index based on LANCA (Beck et al. 2010 and Bos et al. 2016)	EC-JRC, 2017	III
<b>Water use<sup>#</sup></b>	User deprivation potential (deprivation-weighted water consumption)	m <sup>3</sup> world <sub>eq</sub>	Available Water REmaining (AWARE) as recommended by UNEP, 2016	EC-JRC, 2017	III
<b>Resource use<sup>23</sup>, minerals and metals</b>	Abiotic resource depletion (ADP ultimate reserves)	kg Sb <sub>eq</sub>	CML 2002 (Guinée et al., 2002) and van Oers et al. 2002.		III
<b>Resource use, fossils</b>	Abiotic resource depletion – fossil fuels (ADP-fossil) <sup>24</sup>	MJ	CML 2002 (Guinée et al., 2002) and van Oers et al. 2002	EC-JRC, 2017	III

1485 \*Long-term emissions (occurring beyond 100 years) shall be excluded from the toxic impact categories. Toxicity  
1486 emissions to this sub-compartment have a characterisation factor set to 0 in the EF LCIA (to ensure consistency). If  
1487 included by the applicant in the LCI modelling, the sub-compartment 'unspecified (long-term)' shall be used.

1488 *#The results for water use might be overestimated and shall therefore be interpreted with caution. Some of*  
1489 *the EF datasets tendered during the pilot phase and used in this PEFCR/OEFSR include inconsistencies in the*  
1490 *regionalization and elementary flow implementations. This problem has nothing to do with the impact*  
1491 *assessment method or the implementability of EF methods, but occurred during the technical development*  
1492 *of some of the datasets. The PEFCR/OEFSR remains valid and usable. The affected EF datasets will be*  
1493 *corrected by mid-2019. At that time it will be possible to review this PEFCR/OEFSR accordingly, if seen*  
1494 *necessary.*

1495 The list of normalization factors and weighting factors are available in Annex A.

<sup>22</sup> This index is the result of the aggregation, performed by JRC, of the 4 indicators provided by LANCA model as indicators for land use

<sup>23</sup> The indicator "biotic resource intensity" was initially recommended under the additional environmental information. It will be further worked upon and explored during the transition phase.

<sup>24</sup> In the ILCD flow list, and for the current recommendation, Uranium is included in the list of energy carriers, and it is measured in MJ.

1496 The full list of characterization factors (EC-JRC, 2017a) is available at this link  
1497 <http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>

1498

## 1499 **7.4 Identification of most relevant impact categories, life cycle stages, processes** 1500 **and elementary flows**

1501 The identification of most relevant impact categories, life cycle stages, processes, direct elementary flows,  
1502 benchmark, and classes of performance shall be based on the screening study.

1503 There is an important operational difference between most relevant impact categories, and life cycle  
1504 stages on one hand and most relevant processes, and direct elementary flows on the other. In particular,  
1505 most relevant impact categories and life cycle stages are mainly relevant in the context of the  
1506 "communication" part of PEF. They might serve the purpose of "warning" an organisation about the area  
1507 where they should focus their attention in order to look deeper on how to improve the environmental  
1508 performance of their product.

1509 The identification of the most relevant processes and direct elementary flows is more important for the  
1510 engineers/designers to identify actions for improving the overall footprint e.g. by-pass or change a process,  
1511 further optimise a process, apply antipollution technology etc. This is in particular relevant for internal  
1512 studies. However, and this is specific to the PEFCR development process, the identification of the most  
1513 relevant processes and direct elementary flows has a key role in the decision process to identify data-  
1514 related requirements (see section below on data quality requirements for further information).

### 1515 **7.4.1 Procedure to identify the most relevant impact categories**

1516 The identification of the most relevant impact categories shall be based on the normalised and weighted  
1517 results of the representative product(s) as recalculated after the remodelling. At last three relevant impact  
1518 categories shall be considered. The most relevant impact categories shall be identified as all impact  
1519 categories that cumulatively contribute to at least **80%** of the total environmental impact (excluding  
1520 toxicity related impact categories). This should start from the largest to the smallest contributions. The TS  
1521 may add more impact categories to the list of the most relevant ones but none shall be deleted.

### 1522 **7.4.2 Procedure to identify the most relevant life cycle stages**

1523 The most relevant life cycle stages are the life cycle stages which together contribute to at least **80%** of any  
1524 of the most relevant impact categories identified. This should start from the largest to the smallest  
1525 contributions. The TS may add more life cycle stages to the list of the most relevant ones but none shall be  
1526 deleted.

1527 In order to guarantee a minimum level of harmonisation among different PEFCRs, the default life cycle  
1528 stages presented in the PEFCR shall be as a minimum:

- 1529 ● Raw material acquisition and pre-processing (including production of parts and unspecific
- 1530 components);
- 1531 ● Production of the main product;
- 1532 ● Product distribution and storage;
- 1533 ● Use stage (if in scope);
- 1534 ● End-of-life (including product, recovery / recycling, if in scope).

1535 The TS may decide to split or add additional life cycle stages if there are good reasons for and this shall be  
 1536 justified in the PEFCR. E.g., the life cycle stage 'Raw material acquisition and pre-processing' may be split  
 1537 into 'Raw material acquisition', 'pre-processing', and 'raw materials supplier transport'.

1538 If the use stage accounts for more than 50% of the total impact then the procedure shall be re-run by  
 1539 excluding the use stage. In this case, the list of most relevant life cycle stages shall be those selected  
 1540 through the latter procedure plus the use stage.

1541 **7.4.3 Procedure to identify the most relevant processes**

1542 Each most relevant impact category shall be further investigated to identify the most relevant processes  
 1543 used to model each life cycle stage. The processes shall be modelled as disaggregated at level-1.  
 1544 Similar/identical processes taking place in different life cycle stages (e.g. transportation) shall be accounted  
 1545 for separately. The identification of the most relevant processes shall be done according to Table 3 below.

1546 **Table 3. Criteria to select at which life cycle stage level to identify the most relevant processes.**

Contribution of the use stage to the total impact	Most relevant processes identified at the level of
≥ 50%	<ul style="list-style-type: none"> <li>· Whole life cycle excluding use stage, and</li> <li>· Use stage</li> </ul>
< 50%	<ul style="list-style-type: none"> <li>· Whole life cycle</li> </ul>

1547 The most relevant processes are those that collectively contribute at least with **80%** to any of the most  
 1548 relevant impact categories identified. The TS may add more processes to the list of the most relevant ones  
 1549 but none shall be delete.

1550 In most cases, vertically aggregated datasets may be identified as representing relevant processes. In such  
 1551 cases it may not be obvious which process is responsible for contributing to an impact category. The  
 1552 metadata accompanying the data should be analysed by the TS and used to identify the most relevant  
 1553 processes. If this is not possible, the TS may decide whether to seek further disaggregated data or to treat  
 1554 the aggregated dataset as a process for the purposes of identifying relevance<sup>25</sup>.

---

<sup>25</sup> In this last case, if an aggregated dataset is relevant, everything in it is automatically relevant

#### 1555 **7.4.4 Procedure to identify the most relevant direct elementary flows**

1556 For each most relevant process, the identification of the most relevant direct elementary flows is important  
1557 to define which direct emissions or resource use should be requested as company-specific data (i.e. the  
1558 foreground elementary flows within the processes listed in the PEFCR as mandatory company-specific).

1559 The most relevant direct elementary flows are defined as those direct elementary flows contributing  
1560 cumulatively at least with **80%** to the total impact of the direct elementary flows of the process, for each  
1561 most relevant impact category. The analysis shall be limited to the direct emissions of the level-1  
1562 disaggregated datasets. This means that the 80% cumulative contribution shall be calculated against the  
1563 impact caused by the direct emissions only, and not against the total impact of the process. The TS may  
1564 add more elementary flows to the list of the most relevant ones but none shall be delete.

1565 During the pilot phase, this is excluded from the procedures and no most relevant direct elementary flows  
1566 shall be identified. During the transition phase the inclusion of this procedure will be reconsidered.

#### 1567 **7.4.5 Dealing with negative numbers**

1568 When identifying the percentage impact contribution for any life cycle stage, process or flow, it is  
1569 important that absolute values are used (i.e. the minus sign is ignored). This allows the relevance of any  
1570 credits (e.g., from recycling) to be identified. In case of flows with a negative impact score, (i) you should  
1571 consider those flows to have a plus sign, namely a positive score, (ii) the total impact score needs to be  
1572 recalculated including the converted negative scores, (iii) the total impact score is set to 100% and (iv) the  
1573 percentage impact contribution for any life cycle stage, process or flow is assessed to this new total.

#### 1574 **7.4.6 Specific instructions about aggregating elementary flows**

1575 Metal resource flows are not specified per origin of ore type in the source files of the ILCD recommended  
1576 methods. However, in several background databases, metal resource flows are differentiated (for example,  
1577 Silver, Ag 4.6E-5%, Au 1.3E-4%, in ore, Silver, Ag 4.2E-3%, Au 1.1E-4%, in ore, Silver, Ag 2.1E-4%, Au 2.1E-  
1578 4%, in ore, etc.). Therefore, the specified flows were added to the ILCD method in LCA software packages  
1579 with the same characterization factors as for the unspecified metals. When doing a contribution analysis of  
1580 the metal resource flows, the flows per metal (silver, copper, nickel, etc.) shall be aggregated

1581 There are five different fossil energy resource flows specified in the source files of the ILCD recommended  
1582 methods (brown coal; 11.9 MJ/kg, crude oil; 42.3 MJ/kg, hard coal; 26.3 MJ/kg, natural gas; 44.1 MJ/kg,  
1583 peat; 8.4 MJ/kg). However, in several background databases, fossil energy resource flows are specified with  
1584 different calorific values (for example, Gas, natural, 46.8 MJ per kg, Gas, natural, 36.6 MJ per m3, Gas,  
1585 natural, 35 MJ per m3, Gas, natural, 30.3 MJ per kg, etc.<sup>26</sup>). Therefore, the specified flows were added to  
1586 the ILCD method in LCA software packages with characterization factors related to the factors in the  
1587 original source, taking the different calorific value into account. When doing a contribution analysis of the

---

<sup>26</sup> These different flows can appear due the inconsistency between different databases.

1588 fossil energy resource flows the flows based on the 5 original flows (brown coal, crude oil, hard coal,  
 1589 natural gas and peat) shall be aggregated.

1590 **7.4.7 Conclusions**

1591 In Table 4 the requirements to define most relevant contributions are summarized.

1592 **Table 4. Summary of requirements to define most relevant contributions.**

Item	At what level does relevance need to be identified?	Threshold
<b>Most relevant impact categories</b>	Normalised and weighted results	Impact categories cumulatively contributing at least <b>80%</b> of the total environmental impact (excluding toxicity related impact categories)
<b>Most relevant life cycle stages</b>	For each most relevant impact category	All life cycle stages contributing cumulatively more than <b>80%</b> to that impact category
<b>Most relevant processes</b>	For each most relevant impact category	All processes contributing cumulatively more than <b>80%</b> to that impact category
<b>Most relevant elementary flows (excluded for the pilot phase)</b>	For each most relevant process and most relevant impact category	All direct elementary flows contributing cumulatively at least to <b>80%</b> to the impact (caused by the direct elementary flows only)

1593 **7.4.8 Example**

1594 What follows is a fictitious example, not based on any specific PEF study results.

1595 **Most relevant impact categories**

1596 **Table 5. Contribution of different impact categories based on normalised and weighted results**

Impact category	Contribution to the total impact (%)	Contribution % (excluding toxicity impact categories)
Climate change	21.5	28.0
Ozone depletion	3.0	3.9
Human toxicity, cancer	8.3	-
Human toxicity, non-cancer	14.9	-

Impact category	Contribution to the total impact (%)	Contribution % (excluding toxicity impact categories)
Particulate matter	0.1	0.1
Ionizing radiation, human health	0.5	0.7
Photochemical ozone formation, human health	2.4	3.1
Acidification	1.5	2.1
Eutrophication, terrestrial	1.0	1.3
Eutrophication, freshwater	1.0	1.3
Eutrophication, marine	0.1	0.1
Ecotoxicity, freshwater	0.1	-
Land use	14.3	18.6
Water use	18.6	24.2
Resource use, minerals and metals	6.7	8.8
Resource use, fossils	6.0	7.8

1597 Based on the normalised and weighted results, and excluding the toxicity related impacts, the most  
1598 relevant impact categories are: climate change, water use, land use, and resource use (minerals and metals  
1599 and fossils) for a cumulative contribution of 87.4% of the total impact.

1600 **Most relevant life cycle stages**

1601 **Table 6. Contribution of different life cycle stages to the climate change impact category (based on the**  
1602 **characterised inventory results)**

Life cycle stage	Contribution (%)
Raw material acquisition and pre-processing	50.3
Production of the main product	21.2
Product distribution and storage	16.5
Use stage (if in scope)	5.9
End-of-life	6.1

1603 The three life cycle stages in yellow will be the ones identified as "most relevant" for climate change as  
 1604 they are contributing to more than 80%. Ranking shall start from the highest contributors. This procedure  
 1605 shall be repeated for all the selected most relevant EF impact categories.

1606 **Most relevant processes**

1607 **Table 7. Contribution of different processes to the climate change impact category (based on the characterised**  
 1608 **inventory results)**

Life cycle stage	Unit process	Contribution (%)
Raw material acquisition and pre-processing	Process A	8.9
	Process B	41.4
Production of the main product	Process C	18.4
	Process D	2.8
Product distribution and storage	Process E	16.5
Use stage	Process F	5.9
End-of-life	Other processes	6.1

1609 According to the proposed procedure the processes B, C and E shall be selected as "most relevant".  
 1610 However, the TS could consider deciding that process D, even if only contributing to 2.8% (and therefore  
 1611 not contributing more than Process A which is not relevant) is considered as most relevant to their sector,  
 1612 maybe because is the one of those expected to be in situation 1 of the DNM. They may therefore decide to  
 1613 add that process to the list of the most relevant that therefore would become: Process **B, C, D** and **E**.

1614 This procedure shall be repeated for all the selected most relevant impact categories.

1615 **Most Relevant direct elementary flows (excluded for the pilot phase)**

1616 **Table 8. Example of impact assessment results - contribution of each elementary flow to a specific process (climate**  
 1617 **change, results expressed in gCO<sub>eq</sub>).**

Inventory flow	Substance 1	Substance 2	Substance 3	Substance 4	Substance 5	Total
Process B	1100	600	500	450	50	2700
Process C	300	250	20	30	430	1030
Process E	64	1	1	1	1	68
<b>Total</b>	1464	856	521	481	436	3798

1618

1619 **Table 9. Most relevant direct elementary flows contributing to climate change (based on the inventory results**  
 1620 **before normalisation and weighting) – process level.**

Inventory flow	Substance 1	Substance 2	Substance 3	Substance 4	Substance 5	Total
Process B	41%	22%	19%	17%	2%	100%
Process C	29%	24%	2%	3%	42%	100%
Process E	94%	1%	1%	1%	1%	100%

1621

1622 In this case the PEFCR shall require the reporting of the direct emissions in blue for each of the three most  
 1623 relevant processes. This procedure shall be repeated for all the selected most relevant impact categories.

1624 **7.5 Sampling procedure**

1625 In some cases, a sampling procedure is needed by the applicant of a PEFCR in order to limit the data  
 1626 collection only to a representative sample of plants/farms etc. Examples of cases when the sampling  
 1627 procedure may be needed are in case multiple production sites are involved in the production of the same  
 1628 SKU. E.g., in case the same raw material/input material comes from multiple sites or in case the same  
 1629 process is outsourced to more than one subcontractor/supplier.

1630 There exist different procedures to derive a representative sample. For PEFCRs a stratified sample shall be  
 1631 used, i.e. one that ensures that sub-populations (strata) of a given population are each adequately  
 1632 represented within the whole sample of a research study. With this type of sampling, it is guaranteed that  
 1633 subjects from each sub-population are included in the final sample, whereas simple random sampling does  
 1634 not ensure that sub-populations are represented equally or proportionately within the sample.

1635 Using a stratified sample will always achieve greater precision than a simple random sample, provided that  
 1636 the sub-populations have been chosen so that the items of the same sub-population are as similar as  
 1637 possible in terms of the characteristics of interest. In addition, a stratified sample guarantees better  
 1638 coverage of the population. The researcher has control over the sub-populations that are included in the  
 1639 sample, whereas simple random sampling does not guarantee that sub-populations (strata) of a given  
 1640 population are each adequately represented within the final sample. However, one main disadvantage of  
 1641 stratified sampling is that it can be difficult to identify appropriate sub-populations for a population.

1642 The following procedure shall be applied in order to select a representative sample as a stratified sample:

- 1643 1) define the population
- 1644 2) define homogenous sub-populations (stratification)
- 1645 3) define the sub-samples at sub-population level
- 1646 4) define the sample for the population starting from the definition of sub-samples at sub-population  
 1647 level.



1648 **7.5.1 How to define homogenous sub-populations (stratification)**

1649 Stratification is the process of dividing members of the population into homogeneous subgroups (sub-  
1650 populations) before sampling. The sub-populations should be mutually exclusive: every element in the  
1651 population shall be assigned to only one sub-population.

1652 Aspects at least to be taken into consideration in the identification of the sub-populations:

- 1653 - Geographical distribution of sites
- 1654 - Technologies/farming practices involved
- 1655 - Production capacity of the companies/sites taken into consideration

1656 Additional aspects to be taken into consideration may be added by the TS for a specific product category.

1657 The number of sub-populations may be identified as:

1658 
$$N_{sp} = g * t * c \quad \text{[Equation 1]}$$

- 1659 ○ N<sub>sp</sub>: number of sub-populations
- 1660 ○ g : number of countries in which the sites/plants/farms are located
- 1661 ○ t : number of technologies/farming practices
- 1662 ○ c : number of classes of capacity of companies

1663 In case additional aspects are taken into account, the number of sub-populations is calculated using the  
1664 formula just provided and multiplying the result with the numbers of classes identified for each additional  
1665 aspect (e.g., those sites which have an environmental management or reporting systems in place).

1666 **Example 1**

1667 Identify the number of sub-populations for the following population:

1668 350 farmers located in the same region in Spain, all the farmers have more or less the same annual  
1669 production and are characterized by the same harvestings techniques.

1670 In this case:

- 1671 • g=1 : all the farmers are located in the same country
- 1672 • t=1 : all the framers are using the same harvesting techniques
- 1673 • c=1 : the capacity of the companies is almost the same (i.e. the have the same annual production)

1674 
$$N_{sp} = g * t * c = 1 * 1 * 1 = 1$$

1675 Only one sub-population may be identified that coincides with the population.

1676 **Example 2**

1677 350 farmers are distributed in three different countries (100 in Spain, 200 in France and 50 in Germany).  
 1678 There are two different harvesting techniques that are used that differ in a relevant way (Spain: 70  
 1679 technique A, 30 technique B; France: 100 technique A, 100 technique B; Germany: 50 technique A). The  
 1680 capacity of the farmers in term of annual production varies between 10000t and 100000t. According to  
 1681 expert judgement/relevant literature, it has been estimated that farmers with an annual production lower  
 1682 than 50000t are completely different in terms of efficiency compared to the farmers with an annual  
 1683 production higher than 50000t. Two classes of companies are defined based on the annual production:  
 1684 class 1, if production is lower than 50000 and class 2, if production if higher than 50000. (Spain: 80 class 1,  
 1685 20 class 2; France: 50 class 1, 150 class 2; Germany: 50 class 1). In Table 10 are included the details about  
 1686 the population.

1687 **Table 10. Identification of the sub-population for Example 2.**

Sub-population	Country		Technology		Capacity	
1	Spain	100	Technique A	70	Class 1	50
2	Spain		Technique A		Class 2	20
3	Spain		Technique B	30	Class 1	30
4	Spain		Technique B		Class 2	0
5	France	200	Technique A	100	Class 1	20
6	France		Technique A		Class 2	80
7	France		Technique B	100	Class 1	30
8	France		Technique B		Class 2	70
9	Germany	50	Technique A	50	Class 1	50
10	Germany		Technique A		Class 2	0
11	Germany		Technique B	0	Class 1	0
12	Germany		Technique B		Class 2	0

1688

1689 In this case:

- 1690 •  $g=3$  : three countries
- 1691 •  $t=2$  : two different harvesting techniques are identified
- 1692 •  $c=2$  : two classes of production are identified

1693 
$$N_{sp} = g * t * c = 3 * 2 * 2 = 12$$

1694 It is possible to identify maximum 12 sub-populations that are summarized in Table 11 :

1695 **Table 11. Summary of the sub-population for example 2.**

Sub-population	Country	Technology	Capacity	Number of companies in the sub-population
1	Spain	Technique A	Class 1	50
2	Spain	Technique A	Class 2	20

Sub-population	Country	Technology	Capacity	Number of companies in the sub-population
3	Spain	Technique B	Class 1	30
4	Spain	Technique B	Class 2	0
5	France	Technique A	Class 1	20
6	France	Technique A	Class 2	80
7	France	Technique B	Class 1	30
8	France	Technique B	Class 2	70
9	Germany	Technique A	Class 1	50
10	Germany	Technique A	Class 2	0
11	Germany	Technique B	Class 1	0
12	Germany	Technique B	Class 2	0

1696 **7.5.2 How to define sub-sample size at sub-population level**

1697 Once the sub-populations have been identified, for each sub-population the size of sample shall be  
1698 calculated (the sub-sample size). Two approaches are possible:

- 1699 1) based on the total production of the sub-population  
1700 2) based on the number of sites/farms/plants involved in the sub-population

1701 The chosen approach shall be specified in the PEFCR. The same approach shall be used for all the sub-  
1702 populations selected.

1703 **7.5.2.1 First approach**

1704 In case the first approach is chosen the PEFCR shall establish the unit of measure for the production, if t,  
1705 m<sup>3</sup>, m<sup>2</sup>, value). The PEFCR shall identify the percentage of production to be covered by each sub-  
1706 population. The percentage of production to be covered by each sub-population shall not be lower than  
1707 50%, expressed in the relevant unit. This percentage determines the sample size within the sub-population.

1708 **7.5.2.2 Second approach**

1709 In case the second approach is chosen:

1710 The required sub-sample size shall be calculated using the square root of the sub-population size.

1711 
$$n_{SS} = \sqrt{n_{SP}} \quad \text{[Equation 2]}$$

- 1712 ○ n<sub>SS</sub>: required sub-sample size  
1713 ○ n<sub>SP</sub>: sub-population size

1714 **Example**

1715 **Table 12. Example – how to calculate the number of companies in each sub-sample.**

Sub-population	Country	Technology	Capacity	Number of companies in the sub-population	Number of companies in the sample (sub-sample size, [n <sub>SS</sub> ])
1	Spain	Technique A	Class 1	50	7
2	Spain	Technique A	Class 2	20	5
3	Spain	Technique B	Class 1	30	6
4	Spain	Technique B	Class 2	0	0
5	France	Technique A	Class 1	20	5
6	France	Technique A	Class 2	80	9
7	France	Technique B	Class 1	30	6
8	France	Technique B	Class 2	70	8
9	Germany	Technique A	Class 1	50	7
10	Germany	Technique A	Class 2	0	0
11	Germany	Technique B	Class 1	0	0
12	Germany	Technique B	Class 2	0	0

1716 **7.5.3 How to define the sample for the population**

1717 The representative sample of the population corresponds to the sum of the sub-samples at sub-population  
1718 level.

1719 **7.5.4 What to do in case rounding is necessary**

1720 In case rounding is necessary, the general rule used in mathematics shall be applied:

- 1721 • If the number you are rounding is followed by 5, 6, 7, 8, or 9, round the number up.
- 1722 • If the number you are rounding is followed by 0, 1, 2, 3, or 4, round the number down.

1723 **7.5.5 Requirements for the PEFCR**

1724 The TS shall decide if sampling is allowed or not allowed in its PEFCR. The TS may explicitly prohibit the use  
1725 of sampling procedures in the PEFCR, in this case sampling won't be allowed for PEF studies. If the TS  
1726 allows sampling, the PEFCR shall contain a sentence like: "In case sampling is needed, it shall be conducted  
1727 as specified in this PEFCR. However, sampling is not mandatory and any applicant of this PEFCR may decide  
1728 to collect the data from all the plants or farms, without performing any sampling".

1729 In case the PEFCR allows the use of sampling in PEF studies, the PEFCR shall:

- 1730 • list the aspect to be taken into consideration in the selection of the sample for data collection;
- 1731 • identify and list aspects that shall be taken into consideration when identifying the sub-  
1732 populations, in addition to the three proposed by default in this document (if appropriate);
- 1733 • identify which of the two approaches shall be used to define the size of sub-samples at sub-  
1734 population level in case the applicant needs a sampling procedure, if the approach based on the

1735 total production of the sub-population of the approach based on the number of sites/farms/plants  
1736 involved in the sub-population;

- 1737 • in case approach 1) is chosen, define the percentage of representativeness and how this  
1738 percentage shall be calculated by the applicant of the PEFCR. The percentage shall not be lower  
1739 than the minimum identified in this document, e.g. 50% of the production;
- 1740 • the PEFCR shall define the requirements for reporting by the user of the PEFCR. Description of the  
1741 population and of the selected sample used for the EF study shall be clearly described in the EF  
1742 report. E.g., the % of the total production or % of number of sites, following the requirements  
1743 stated in the PEFCR.

1744

## 1745 **7.6 Cut-Off**

1746 Any cut-off shall be avoided in the screening study and supporting studies. However, based on the results  
1747 of the screening study and if confirmed by the supporting study results, the PEFCR may identify and list the  
1748 processes excluded from the modelling by applying the following rule:

- 1749 - In case processes are excluded from the model this shall be done based on a 1% cut-off for all impact  
1750 categories based on environmental significance, additionally to the cut-off already included in the  
1751 background datasets. This rule is valid for both intermediate and final products. To calculate a 1% cut-  
1752 off order the processes starting from the less relevant to the most relevant one. The processes that in  
1753 total account less than 1% of the environmental impact for each impact category may be excluded  
1754 from PEF studies (starting from the less relevant). In case the pilot decides to apply the cut-off rule,  
1755 the PEFCR shall list the processes that may be excluded based on the cut-off.
- 1756 - Human toxicity-Cancer effect, Human toxicity-non Cancer effect and Freshwater Ecotoxicity shall not  
1757 be taken into account when selecting processes that may be excluded based on the cut-off rule. In  
1758 other words, it means that if a process accounts for less than 1% for all the impact categories with the  
1759 only exception of toxicity-related ICs, this process may be cut-off.
- 1760 - In case the processes identified following this procedure starting from the results of the screening  
1761 study are not confirmed by the supporting studies, these cannot be excluded based on the cut-off  
1762 rule.

1763  
1764 Only the processes identified following this procedure starting from the results of the screening study and  
1765 confirmed by the supporting studies may be listed in the PEFCR and excluded according to the cut off rule.  
1766 No additional cut-offs are allowed for PEF studies in addition to those listed in the PEFCR.  
1767

## 1768 **7.7 Handling multi-functional processes**

1769 If a process or facility provides more than one function, i.e. it delivers several goods and/or services ("co-  
1770 products"), it is "multifunctional". In these situations, all inputs and emissions linked to the process shall be  
1771 partitioned between the product of interest and the other co-products in a principled manner. Systems  
1772 involving multi-functionality of processes shall be modelled in accordance with the following decision

1773 hierarchy, with additional guidance provided by PEFCRs if available. However, for activities at farm, and  
1774 activities at slaughterhouse, and electricity use the allocation approach to be used shall be the one  
1775 described in sections 7.10, 7.11, and 7.13 respectively.

## 1776 **Decision hierarchy**

### 1777 I) Subdivision or system expansion

1778 Wherever possible, subdivision or system expansion should be used to avoid allocation. Subdivision refers  
1779 to disaggregating multifunctional processes or facilities to isolate the input flows directly associated with  
1780 each process or facility output. System expansion refers to expanding the system by including additional  
1781 functions related to the co-products. It shall be investigated first whether the analysed process can be  
1782 subdivided or expanded. Where subdivision is possible, inventory data should be collected only for those  
1783 unit processes<sup>27</sup> directly attributable<sup>28</sup> to the goods/services of concern. Or if the system can be expanded,  
1784 the additional functions shall be included in the analysis with results communicated for the expanded  
1785 system as a whole rather than on an individual co-product level.

### 1786 II) Allocation based on a relevant underlying physical relationship

1787 Where subdivision or system expansion cannot be applied, allocation should be applied: the inputs and  
1788 outputs of the system should be partitioned between its different products or functions in a way that  
1789 reflects relevant underlying physical relationships between them. (ISO 14044:2006, 14)

1790 Allocation based on a relevant underlying physical relationship refers to partitioning the input and output  
1791 flows of a multi-functional process or facility in accordance with a relevant, quantifiable physical  
1792 relationship between the process inputs and co-product outputs (for example, a physical property of the  
1793 inputs and outputs that is relevant to the function provided by the co-product of interest). Allocation based  
1794 on a physical relationship can be modelled using direct substitution if a product can be identified that is  
1795 directly substituted<sup>29</sup>.

1796 Can a direct substitution-effect be robustly modelled? This can be demonstrated by proving that (1) there  
1797 is a direct, empirically demonstrable substitution effect, AND (2) the substituted product can be modelled  
1798 and the resource use and emissions profile data subtracted in a directly representative manner: If yes (i.e.  
1799 both conditions are verified), model the substitution effect.

1800 Or

1801 Can input/output flows be allocated based on some other relevant underlying physical relationship that  
1802 relates the inputs and outputs to the function provided by the system? This can be demonstrated by  
1803 proving that a relevant physical relationship can be defined by which to allocate the flows attributable to

---

<sup>27</sup> A unit process is the smallest element considered in the Resource Use and Emissions Profile for which input and output data are quantified. (based on ISO 14040:2006)

<sup>28</sup> Directly attributable refers to a process, activity or impact occurring within the defined system boundary.

<sup>29</sup> See below for an example of direct substitution.

1804 the provision of the defined function of the product system<sup>30</sup>: If yes, allocate based on this physical  
1805 relationship.

1806

1807 III) Allocation Based on Some Other Relationship

1808 Allocation based on some other relationship may be possible. For example, economic allocation refers to  
1809 allocating inputs and outputs associated with multi-functional processes to the co-product outputs in  
1810 proportion to their relative market values. The market price of the co-functions should refer to the specific  
1811 condition and point at which the co-products are produced. Allocation based on economic value shall only  
1812 be applied when (I and II) are not possible. In any case, a clear justification for having discarded I and II and  
1813 for having selected a certain allocation rule in step III shall be provided, to ensure the physical  
1814 representativeness of the PEF results as far as possible.

1815 Allocation based on some other relationship can be approached in one of the following alternative ways:

1816 Can an indirect substitution<sup>31</sup> effect be identified? AND can the substituted product be modelled and the  
1817 inventory subtracted in a reasonably representative manner? If yes (i.e. both conditions are verified),  
1818 model the indirect substitution effect.

1819

1820 Or

1821 Can the input/output flows be allocated between the products and functions on the basis of some other  
1822 relationship (e.g. the relative economic value of the co-products)? If yes, allocate products and functions  
1823 on the basis of the identified relationship

1824

1825 Dealing with multi-functionality of products is particularly challenging when recycling or energy recovery of  
1826 one (or more) of these products is involved as the systems tend to get rather complex. The Circular  
1827 Footprint Formula (see section 7.18.1) provides an approach that shall be used to estimate the overall  
1828 emissions associated to a certain process involving recycling and/or energy recovery. These moreover also  
1829 relate to waste flows generated within the system boundaries.

1830 The PEFCR shall further specify multi-functionality solutions for application within the defined system  
1831 boundaries and, where appropriate, for upstream and downstream stages. If feasible/appropriate, the  
1832 PEFCR may further provide specific factors to be used in the case of allocation solutions. All such multi-  
1833 functionality solutions specified in the PEFCR shall be clearly justified with reference to the PEF multi-  
1834 functionality solution hierarchy.

- 1835
- Where subdivision is applied, the PEFCR shall specify which processes are to be sub-divided and the  
1836 principles that such subdivision should adhere to.

---

<sup>30</sup> A product system is the collection of unit processes with elementary and product flows, performing one or more defined functions, and which models the life cycle of a product (ISO 14040:2006)

<sup>31</sup> Indirect substitution occurs when a product is substituted but you don't know by which products exactly.

- 1837 • Where allocation by physical relationship is applied, the PEFCR shall specify the relevant underlying  
1838 physical relationships to be considered and list allocation values (which shall be fixed for all studies  
1839 applying the PEFCR).
- 1840 • Where allocation by some other relationship is applied, the PEFCR shall specify this relationship  
1841 and list the allocation values (which shall be fixed for all studies applying the PEFCR).

## 1842 7.8 Extended product lifetime

1843 Extended product lifetime, due to reuse or refurbishment of a product, can be split into two situations:

- 1844 1. Into a product with original product specifications (providing the same function)
- 1845 2. Into a product with different product specifications (providing another function)

1846 In situation 1, the product lifetime is extended into a product with original product specifications (providing  
1847 the same function) and shall be included in the FU and reference flow. The PEFCR shall describe how reuse  
1848 or refurbishment is included in the calculations of the reference flow and full life cycle model, taking into  
1849 account the “how long” of the FU. Default values for extended lifetime shall be provided in the PEFCR or  
1850 shall be listed as mandatory company-specific information to be collected.

1851 In situation 2, the reuse/refurbishment of a product results into a product with different product  
1852 specifications (providing another function). This shall be considered as part of the CFF, as a form of  
1853 recycling (see section 7.18.23). Also, old parts that have been changed during refurbishment shall be  
1854 modelled under the CFF.

### 1855 7.8.1 Reuse rates

1856 Reuse rate is the number of times a material is used at the factory. This is often also called trip rates, reuse  
1857 time or number of rotations. This may be expressed as the absolute number of reuse or as % of reuse rate.  
1858 For example: a reuse rate of 80% equals 5 reuses. Equation 3 describes the conversion:

$$1859 \text{ Number of reuse} = \frac{1}{100\% - \% \text{ reuse rate}} \quad \text{[Equation 3]}$$

1860 The number of reuse applied here refers to the total number of uses during the life of the material. It  
1861 includes both the first use and all the following reuses.

1862 Specific calculation rules for reusable packaging as well as average reuse rates for company or third party  
1863 operated packaging pools can be found in section 7.16.2.

### 1864 7.8.2 How to apply 'reuse rate' (situation 1)

1865 The number of times a material is reused affects the environmental profile of the product at different life  
1866 cycle stages. The following 5 steps explain how the different life cycle stages with reusable materials shall  
1867 be modelled, using packaging as an example:



1868 1) Raw material acquisition: The reuse rate determines the quantity of packaging material consumed per  
1869 product sold. The raw material consumption shall be calculated by dividing the actual weight of the  
1870 packaging by the number of times this packaging is reused. For example: A 1l glass bottle weights 600  
1871 grams and is reused 10 times. The raw material use per litre is 60 gram (= 600 gram per bottle / 10 reuses).

1872 2) Transport from packaging manufacturer to the product factory (where the products are packed): The  
1873 reuse rate determines the quantity of transport that is needed per product sold. The transport impact shall  
1874 be calculated by dividing the one-way trip impact by the number of times this packaging is reused. One way  
1875 transport distances shall be provided by the PEFCR.

1876 3) Transport from product factory to final client and back: additional to the transport needed to go to the  
1877 client, the return transport shall also be taken into account. To model the total transport, section 7.14 on  
1878 modelling transport shall be followed.

1879  
1880 4) At product factory: once the empty packaging is returned to the product factory, energy and resource  
1881 use shall be accounted for cleaning, repairing or refilling (if applicable).

1882 5) Packaging End-of-Life: the reuse rate determines the quantity of packaging material (per product sold) to  
1883 be treated at End-of-Life. The amount of packaging treated at End-of-Life shall be calculated by dividing the  
1884 actual weight of the packaging by the number of times this packaging was reused.

## 1885 **7.9 Climate change modelling**

1886 The impact category 'climate change' covers three sub-categories:

- 1887 1. Climate change – fossil
- 1888 2. Climate change – biogenic
- 1889 3. Climate change – land use and land transformation

1890  
1891 To provide all necessary information for developing the PEFCR, the PEFCR screening study shall always  
1892 calculate the three climate change sub-categories separately. If climate change is identified as a most-  
1893 relevant impact category, the PEFCR shall (i) always request to report the total climate change as the sum  
1894 of the three sub-categories, and (ii) shall request the reporting of the sub-categories 'Climate change -  
1895 biogenic' and 'Climate change - land use and land transformation' separately if the screening study shows a  
1896 contribution of more than 5%<sup>32</sup> each to the total score. The PEFCR shall clarify the reason for reporting or  
1897 not reporting the two sub-categories.

1898 The PEF guide indicates that credits from 'temporary carbon storage' are excluded. This means that  
1899 emissions emitted within a limited amount of time after their uptake shall be counted for as emitted "now"  
1900 and there is no discounting of emissions within that given time frame (also in line with ISO/TS14067). The

---

<sup>32</sup>For example, if 'Climate change - biogenic' contributes with 7% (using absolute values) to the total climate change impact and 'Climate change – land use and land transformation' contributes with 3% to the total climate change impact. In that case the Total climate change impact and the 'Climate change – biogenic' shall be reported. It is up to the TS to decide where and how to report the latter ('Climate change – biogenic').

1901 term 'limited amount of time' is here defined as 100 years, in line with other guiding documents such as in  
1902 ILCD handbook (JRC 2016) and PAS2050:2011. Therefore, biogenic carbon emitted later than 100 years  
1903 after its uptake is considered as permanent carbon storage.

#### 1904 **7.9.1 Sub-category 1: Climate change – fossil**

1905 This category covers greenhouse gas (GHG) emissions to any media originating from the oxidation and/or  
1906 reduction of fossil fuels by means of their transformation or degradation (e.g. combustion, digestion,  
1907 landfilling, etc.). This impact category includes emissions from peat and calcination/carbonation of  
1908 limestone.

1909 *Modelling requirements:* The flows falling under this definition should be modelled consistently with the  
1910 most updated EF list of elementary flows<sup>33</sup>. The names ending with '(fossil)' (e.g., 'carbon dioxide (fossil)'  
1911 and 'methane (fossil)') shall be used if available.

#### 1912 **7.9.2 Sub-category 2: Climate change – biogenic**

1913 This sub-category covers carbon emissions to air (CO<sub>2</sub>, CO and CH<sub>4</sub>) originating from the oxidation and/or  
1914 reduction of aboveground biomass by means of its transformation or degradation (e.g. combustion,  
1915 digestion, composting, landfilling) and CO<sub>2</sub> uptake from the atmosphere through photosynthesis during  
1916 biomass growth – i.e. corresponding to the carbon content of products, biofuels or above ground plant  
1917 residues such as litter and dead wood. Carbon exchanges from native forests<sup>34</sup> shall be modelled under  
1918 sub-category 3 (including connected soil emissions, derived products or residues).

1919 *Modelling requirements:* the flows falling under this definition shall be modelled consistently with the most  
1920 updated ILCD list of elementary flows and using the flow names ending with '(biogenic)'. The allocation  
1921 rules used for all other elementary flows shall also apply to model the biogenic carbon flows. A simplified  
1922 modelling approach should be used where only those flows that influence the climate change impact  
1923 results (namely biogenic methane emissions) are modelled. This option is often used by food LCAs as it  
1924 avoids modelling human digestion while deriving eventually at a zero balance. The following rules apply:

- 1925 i. Only the emission 'methane (biogenic)' is modelled
- 1926 ii. No further biogenic emissions and uptakes from atmosphere are modelled
- 1927 iii. When methane emissions can be both fossil or biogenic, the release of biogenic methane shall be  
1928 modelled first and then the remaining fossil methane

1929 In case all emissions and removals are modelled separately, note that the corresponding characterisation  
1930 factors for biogenic CO<sub>2</sub> uptakes and emissions are set to zero. Complementary characterisation factors

---

<sup>33</sup><http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>

<sup>34</sup>Native forests – represents native or long-term, non-degraded forests. Definition adapted from table 8 in Annex V C(2010)3751 to Directive 2009/28/EC. In principle this definition excludes short term forests, degraded forests, managed forest, and forests with short-term or long-term rotations.

1931 shall be applied in case these flows are to be used to calculate additional information. In that case, the  
1932 PEFCR shall describe how the additional information shall be calculated and which complementary  
1933 characterisation factors shall be applied.

1934 For cradle to grave assessments of final products with a lifetime beyond 100 years, a carbon credit shall be  
1935 modelled. For cradle to grave assessments of final products with a lifetime below 100 years, the carbon  
1936 storage time is co-determined by the storage time in the forest system (at plant uptake). Annex I describes  
1937 in detail how the carbon storage time shall be calculated in this case. This could be the case for example for  
1938 olive trees or cork trees.

1939 Carbon credits shall be modelled as an emission uptake as 'resource from air' using the elementary flow  
1940 'carbon dioxide (biogenic-100yr)'. Please note that any carbon credit shall be properly allocated among the  
1941 different by-products the system delivered over the full timeframe. For example, in case cork plantations  
1942 last for 300 years, the amount to carbon stored during 200 years may be credited but shall be allocated  
1943 over the different products the cork plantation delivers. The PEFCR shall request concrete proof of these  
1944 carbon storages in order to get the credits.

1945 For intermediate products (cradle to gate) the lifetime of the final product is not known. Therefore, no  
1946 carbon credits shall be modelled at this point in the life cycle. The biogenic carbon content at factory gate  
1947 (physical content and allocated content) shall always be reported as 'additional technical information'.

### 1948 **7.9.3 Sub-category 3: Climate change – land use and land transformation**

1949 This sub-category accounts for carbon uptakes and emissions (CO<sub>2</sub>, CO and CH<sub>4</sub>) originating from carbon  
1950 stock changes caused by land use change and land use. This sub-category includes biogenic carbon  
1951 exchanges from deforestation, road construction or other soil activities (including soil carbon emissions).  
1952 For native forests, all related CO<sub>2</sub> emissions are included and modelled under this sub-category (including  
1953 connected soil emissions, products derived from native forest<sup>35</sup> and residues), while their CO<sub>2</sub> uptake is  
1954 excluded.

1955 *Modelling requirements:* the flows falling under this definition shall be modelled consistently with the most  
1956 updated ILCD list of elementary flows and using the flow names ending with '(land use change)'. Biogenic  
1957 carbon uptakes and emissions have to be inventoried separately for each elementary flow.

1958 For **land use change:** all carbon emissions and removals shall be modelled following the modelling  
1959 guidelines of PAS 2050:2011 (BSI 2011) and the supplementary document PAS2050-1:2012 (BSI 2012) for  
1960 horticultural products.

1961 *PAS 2050:2011 (BSI 2011): Large emissions of GHGs can result as a consequence of land use change.*  
1962 *Removals as a direct result of land use change (and not as a result of long-term management practices) do*  
1963 *not usually occur, although it is recognized that this could happen in specific circumstances. Examples of*

---

<sup>35</sup> Following the instantaneous oxidation approach in IPCC 2013 (Chapter 2).

1964 *direct land use change are the conversion of land used for growing crops to industrial use or conversion*  
1965 *from forestland to cropland. All forms of land use change that result in emissions or removals are to be*  
1966 *included. Indirect land use change refers to such conversions of land use as a consequence of changes in*  
1967 *land use elsewhere. While GHG emissions also arise from indirect land use change, the methods and data*  
1968 *requirements for calculating these emissions are not fully developed. Therefore, the assessment of*  
1969 *emissions arising from indirect land use change is not included.*

1970 *The GHG emissions and removals arising from direct land use change shall be assessed for any input to the*  
1971 *life cycle of a product originating from that land and shall be included in the assessment of GHG emissions.*  
1972 *The emissions arising from the product shall be assessed on the basis of the default land use change values*  
1973 *provided in PAS 2050:2011 Annex C, unless better data is available. For countries and land use changes not*  
1974 *included in this annex, the emissions arising from the product shall be assessed using the included GHG*  
1975 *emissions and removals occurring as a result of direct land use change in accordance with the relevant*  
1976 *sections of the IPCC (2006). The assessment of the impact of land use change shall include all direct land use*  
1977 *change occurring not more than 20 years, or a single harvest period, prior to undertaking the assessment*  
1978 *(whichever is the longer). The total GHG emissions and removals arising from direct land use change over*  
1979 *the period shall be included in the quantification of GHG emissions of products arising from this land on the*  
1980 *basis of equal allocation to each year of the period<sup>36</sup>.*

1981 *1) Where it can be demonstrated that the land use change occurred more than 20 years prior to the*  
1982 *assessment being carried out, no emissions from land use change should be included in the assessment.*

1983 *2) Where the timing of land use change cannot be demonstrated to be more than 20 years, or a single*  
1984 *harvest period, prior to making the assessment (whichever is the longer), it shall be assumed that the land*  
1985 *use change occurred on 1 January of either:*

- 1986       • *the earliest year in which it can be demonstrated that the land use change had occurred; or*  
1987       • *on 1 January of the year in which the assessment of GHG emissions and removals is being carried*  
1988       *out.*

1989 *The following hierarchy shall apply when determining the GHG emissions and removals arising from land*  
1990 *use change occurring not more than 20 years or a single harvest period, prior to making the assessment*  
1991 *(whichever is the longer):*

- 1992       1. *where the country of production is known and the previous land use is known, the GHG emissions*  
1993       *and removals arising from land use change shall be those resulting from the change in land use*  
1994       *from the previous land use to the current land use in that country (additional guidelines on the*  
1995       *calculations can be found in PAS 2050-1:2012);*  
1996       2. *where the country of production is known, but the former land use is not known, the GHG emissions*  
1997       *arising from land use change shall be the estimate of average emissions from the land use change*  
1998       *for that crop in that country (additional guidelines on the calculations can be found in PAS 2050-*  
1999       *1:2012);*

---

<sup>36</sup> In case of variability of production over the years , a mass allocation should be applied.

2000 3. *where neither the country of production nor the former land use is known, the GHG emissions*  
2001 *arising from land use change shall be the weighted average of the average land use change*  
2002 *emissions of that commodity in the countries in which it is grown.*

2003 *Knowledge of the prior land use can be demonstrated using a number of sources of information, such as*  
2004 *satellite imagery and land survey data. Where records are not available, local knowledge of prior land use*  
2005 *can be used. Countries in which a crop is grown can be determined from import statistics, and a cut-off*  
2006 *threshold of not less than 90% of the weight of imports may be applied. Data sources, location and timing*  
2007 *of land use change associated with inputs to products shall be reported.*

2008 Intermediate products (cradle to gate) derived from native forest shall always report as meta-data (in the  
2009 'additional technical information' section of the PEF study) (i) their carbon content (physical content and  
2010 allocated content) and (ii) that corresponding carbon emissions shall be modelled with '(land use change)'  
2011 elementary flows.

2012 For **soil carbon stock**: soil carbon emissions shall be included and modelled under this sub-category (e.g.,  
2013 from rice fields). Soil carbon emissions derived from aboveground residues (except from native forest) shall  
2014 be modelled under sub-category 2, such as the application of non-native forest residues or straw. Soil  
2015 carbon uptake (accumulation) shall be excluded from the footprint results as it is highly questionable how  
2016 the long term uptakes (beyond 100 years) can be guaranteed in practice. For example, from grasslands or  
2017 improved land management through tilling techniques or other management actions taken in relation to  
2018 agricultural land. Soil carbon storage may be included in the PEF CR as additional environmental  
2019 information when proof is provided. For example, when legislation has different modelling requirements  
2020 for the sector, such as the EU greenhouse gas accounting directive from 2013 (Decision 529/2013/EU)  
2021 which indicate carbon stock accounting.

#### 2022 **7.9.4 Characterisation factors of methane, carbon dioxide and carbon monoxide**

2023 Within the current PEF method, the global warming potentials of the third assessment report of IPCC  
2024 (2007) are applied. The GWPs shall be updated using the Fifth assessment report of IPCC (2013), including  
2025 climate-change carbon feedbacks for both CO<sub>2</sub> and non-CO<sub>2</sub> substances (following the UNEP/SETAC  
2026 recommendations of the Pellston Workshop, January 2016). The values with feedbacks are applied to  
2027 ensure consistency, as feedbacks are already included for CO<sub>2</sub>. The GWPs of well-mixed GHGs can be found  
2028 in chapter 8 of the Scientific basis report, Tables 8.7 and 8.SM.16. The GWPs for near term GHGs are not  
2029 recommended for use due to their complexity and high uncertainty. Near term GHGs refer to substances  
2030 that are not well-mixed once emitted to the atmosphere because of their very rapid decay (black carbon,  
2031 organic carbon, nitrogen oxides, sulphur oxides, volatile organic compounds, and carbon monoxide).

2032 The third assessment IPCC report (2007) estimated the global warming potential for methane at 25 for a  
2033 time period of 100 years. This value factors in the indirect climate effects of methane emissions (such as  
2034 the positive feedback on the methane lifetime and on the concentrations of ozone and stratospheric water  
2035 vapour) but excludes the oxidation of methane into carbon dioxide. The Fifth assessment report of IPCC  
2036 (2013) reports a global warming potential for methane at 34, still with the exclusion of methane oxidation  
2037 into carbon dioxide and which is valid for biogenic methane only (IPCC 2013, Table 8.7). IPCC (2013) refers

2038 to Boucher et al. (2009) to add the methane oxidation for fossil methane, resulting in a GWP of 36. The  
 2039 added value of +2 includes only a partial oxidation of methane into CO<sub>2</sub>. Boucher et al. (2009), calculated  
 2040 an upper limit of +2.5 when considering that all methane is converted into CO<sub>2</sub> and up to +2.75 with a  
 2041 longer time horizon. Within the context of the environmental footprint a simple stoichiometric calculation  
 2042 is used to compensate the avoided CO<sub>2</sub> uptake within the released methane (+2.75). It can be discussed  
 2043 which correction factor should be applied, (i) +2 following IPCC, (ii) +2.5 following the upper margin of  
 2044 Boucher et al. (2009) for a time horizon of 100 years or (iii) +2.75 using the stoichiometric balance (all  
 2045 emissions happens "now"). The last approach is chosen, as a GWP of 36.75 reassures the same outcome  
 2046 between a detailed modelling (modelling all carbon uptakes and releases) and a simplified modelling  
 2047 approach (only modelling the CH<sub>4</sub> release). Within the EF context, the same result between a detailed  
 2048 modelling approach or the EF proposed simplified modelling approach is considered to be essential. This  
 2049 means that for fossil methane a GWP of 36.75 shall be used.

2050 For biogenic carbon modelling the list of ILCD elementary flows and CFs in Table 13 shall be applied:

2051 **Table 13. CFs (in CO<sub>2</sub>-equivalents, with carbon feedbacks).**

Substance	Compartment	GWP <sub>100</sub>
<b>Carbon dioxide (fossil)</b>	Air emission	1
<b>Methane (fossil)</b>	Air emission	36.75
<b>Carbon monoxide (fossil)</b>	Air emission	1.57 <sup>37</sup>
<b>Carbon dioxide (biogenic)</b>	Resources from air	0
<b>Carbon dioxide (biogenic-100yr)</b>	Resources from air	-1
<b>Carbon dioxide (biogenic)</b>	Air emission	0
<b>Methane (biogenic)</b>	Air emission	34
<b>Carbon monoxide (biogenic)</b>	Air emission	0
<b>Carbon dioxide (land use change)</b>	Resources from air	-1
<b>Carbon dioxide (land use change)</b>	Air emission	1
<b>Methane (land use change)</b>	Air emission	36.75
<b>Carbon monoxide (land use change)</b>	Air emission	1.57

2052

<sup>37</sup> The effects of near term climate forcers are uncertain and therefore excluded (following the UNEP/SETAC recommendations of the Pellston Workshop, January 2016). The GWP presented here represents only the effects from degradation of CO into CO<sub>2</sub> (stoichiometric calculation).

2053 **7.10 Agricultural modelling**

2054 For agricultural products the PEFCR shall provide clear modelling guidelines for agricultural activities. The  
2055 modelling guidelines in this chapter shall be followed by the PEFCRs. Any exception to these rules shall be  
2056 agreed with the Commission before being implemented.

2057 **7.10.1 Handling multi-functional processes**

2058 The rules described in the LEAP Guideline shall be followed: 'Environmental performance of animal feeds  
2059 supply chains (pages 36-43), FAO 2015, available at  
2060 <http://www.fao.org/partnerships/leap/publications/en/>.

2061 **7.10.2 Crop type specific and country-region-or-climate specific data**

2062 Crop type specific and country-region-or-climate specific data for yield, water and land use, land use  
2063 change, fertiliser (artificial and organic) amount (N, P amount) and pesticide amount (per active  
2064 ingredient), per hectare per year, should be used.

2065 **7.10.3 Averaging data**

2066 Cultivation data shall be collected over a period of time sufficient to provide an average assessment of the  
2067 life cycle inventory associated with the inputs and outputs of cultivation that will offset fluctuations due to  
2068 seasonal differences. This shall be undertaken as described in the LEAP guidelines<sup>38</sup>, set out below:

- 2069
- 2070 ● For annual crops, an assessment period of at least three years shall be used (to level out  
2071 differences in crop yields related to fluctuations in growing conditions over the years such as  
2072 climate, pests and diseases, et cetera). Where data covering a three-year period is not available i.e.  
2073 due to starting up a new production system (e.g. new greenhouse, newly cleared land, shift to  
2074 other crop), the assessment may be conducted over a shorter period, but shall be not less than 1  
2075 year. Crops/plants grown in greenhouses shall be considered as annual crops/plants, unless the  
2076 cultivation cycle is significantly shorter than a year and another crop is cultivated consecutively  
2077 within that year. Tomatoes, peppers and other crops which are cultivated and harvested over a  
2078 longer period through the year are considered as annual crops.
  - 2079 ● For perennial plants (including entire plants and edible portions of perennial plants) a steady state  
2080 situation (i.e. where all development stages are proportionally represented in the studied time  
2081 period) shall be assumed and a three-year period shall be used to estimate the inputs and  
outputs<sup>39</sup>.

---

<sup>38</sup> Environmental performance of animal feeds supply chains, FAO 2015, available at  
<http://www.fao.org/partnerships/leap/publications/en/>.

<sup>39</sup> The underlying assumption in the cradle to gate life cycle inventory assessment of horticultural products is that the inputs and outputs of the cultivation are in a 'steady state', which means that all development stages of perennial crops (with different quantities of inputs and outputs) shall be proportionally represented in the time period of cultivation that is studied. This approach gives the advantage that inputs and outputs of a relatively short period can

- 2082
- 2083
- 2084
- 2085
- 2086
- 2087
- 2088
- 2089
- 2090
- 2091
- Where the different stages in the cultivation cycle are known to be disproportional, a correction shall be made by adjusting the crop areas allocated to different development stages in proportion to the crop areas expected in a theoretical steady state. The application of such correction shall be justified and recorded. The life cycle inventory of perennial plants and crops shall not be undertaken until the production system actually yields output.
  - For crops that are grown and harvested in less than one year (e.g. lettuce produced in 2 to 4 months) data shall be gathered in relation to the specific time period for production of a single crop, from at least three recent consecutive cycles. Averaging over three years can best be done by first gathering annual data and calculating the life cycle inventory per year and then determine the three years average.

#### 2092 7.10.4 Pesticides

2093 Pesticide emissions shall be modelled as specific active ingredients. The USEtox life cycle impact  
2094 assessment method has a build in multimedia fate model which simulates the fate of the pesticides starting  
2095 from the different emission compartments. Therefore, default emission fractions to environmental  
2096 emission compartments are needed in the LCI modelling (Rosenbaum et al., 2015). As temporary approach,  
2097 the pesticides applied on the field shall be modelled as 90% emitted to the agricultural soil compartment,  
2098 9% emitted to air and 1% emitted to water (based on expert judgement due to current limitations<sup>40</sup>). More  
2099 specific data might be used if available.

2100 A robust model to assess the link between the amount applied on the field and the amount ending up in  
2101 the emission compartment is still missing today. The PESTLCI model might fill in this gap in the future, but is  
2102 currently still under testing.

#### 2103 7.10.5 Fertilisers

2104 Fertiliser (and manure) emissions shall be differentiated per fertilizer type and cover as a minimum:

- 2105
- 2106
- 2107
- 2108
- NH<sub>3</sub>, to air (from N-fertiliser application)
  - N<sub>2</sub>O, to air (direct and indirect) (from N-fertiliser application)
  - CO<sub>2</sub>, to air (from lime, urea and urea-compounds application)
  - NO<sub>3</sub>, to water unspecified (leaching from N-fertiliser application)

---

be used for the calculation of the cradle-to-gate life cycle inventory from the perennial crop product. Studying all development stages of a horticultural perennial crop can have a lifespan of 30 years and more (e.g. in case of fruit and nut trees).

<sup>40</sup> Several databases consider a 100% emitted to soil out of simplification (e.g. Agribalyse and Ecoinvent). It is recognized that emissions to freshwater and air do occur. However, emission fractions vary significantly depending on the type of pesticide, the geographical location, time of application and application technique (ranging from 0% to 100%). Especially the % emitted to water can be strongly debated, however, overall it seems that 1% indicates a reasonable average (e.g. WUR-Alterra 2016: Emissies landbouwbestrijdingsmiddelen). Please note that these are temporary values until future modelling fills this gap.



- 2109 • PO<sub>4</sub>, to water unspecified or freshwater (leaching and run-off of soluble phosphate from P-fertiliser
- 2110 application)
- 2111 • P, to water unspecified or freshwater (soil particles containing phosphorous, from P-fertiliser
- 2112 application).

2113 The impact assessment model for freshwater eutrophication should start (i) when P leaves the agricultural  
 2114 field (run off) or (ii) from manure or fertiliser application on agricultural field. Within LCI modelling, the  
 2115 agricultural field (soil) is often seen as belonging to the technosphere and thus included in the LCI model.  
 2116 This aligns with approach (i) where the impact assessment model starts after run-off, i.e. when P leaves the  
 2117 agricultural field. Therefore, within the EF context, the LCI should be modelled as the amount of P emitted  
 2118 to water after run-off and the emission compartment 'water' shall be used. When this amount is not  
 2119 available, the LCI may be modelled as the amount of P applied on the agricultural field (through manure or  
 2120 fertilisers) and the emission compartment 'soil' shall be used. In this case, the run-off from soil to water is  
 2121 part of the impact assessment method and included in the CF for soil.

2122 The impact assessment marine Eutrophication starts after N leaves the field (soil). Therefore, N emissions  
 2123 to soil shall not be modelled. The amount of emissions ending up in the different air and water  
 2124 compartments per amount of fertilisers applied on the field shall be modelled within the LCI. Nitrogen  
 2125 emissions shall be calculated from Nitrogen applications of the farmer on the field and excluding external  
 2126 sources (e.g. rain deposition). To avoid strong inconsistencies among different PEFCRs, within the EF  
 2127 context it is decided to fix a number of emission factors by following a simplified approach. For nitrogen  
 2128 based fertilisers, the Tier 1 emissions factors of IPCC 2006 (*Table 2-4*) should be used, as presented in Table  
 2129 14. Note that the values provided shall not be used to compare different types of synthetic fertilizers. More  
 2130 detailed modelling shall be used for that. In case better data is available, a more comprehensive Nitrogen  
 2131 field model may be used by the PEFCR, provided (i) it covers at least the emissions requested above, (ii) N  
 2132 shall be balanced in inputs and outputs and (iii) it shall be described in a transparent way.

2133 **Table 14. Tier 1 emission factors of IPCC 2006 (modified).**

Emission	Compartment	Value to be applied
N <sub>2</sub> O (synthetic fertiliser and manure; direct and indirect)	Air	0.022 kg N <sub>2</sub> O/ kg N fertilizer applied
NH <sub>3</sub> (synthetic fertiliser)	Air	kg NH <sub>3</sub> = kg N * FracGASF= 1*0.1* (17/14)= 0.12 kg NH <sub>3</sub> / kg N fertilizer applied
NH <sub>3</sub> (manure)	Air	kg NH <sub>3</sub> = kg N*FracGASF= 1*0.2* (17/14)= 0.24 kg NH <sub>3</sub> / kg N manure applied
NO <sub>3</sub> <sup>-</sup> (synthetic fertiliser and manure)	Water	kg NO <sub>3</sub> <sup>-</sup> = kg N*FracLEACH = 1*0.3*(62/14) = 1.33 kg NO <sub>3</sub> <sup>-</sup> / kg N applied

2134

2135 It is recognized that the above nitrogen field model has its limitations and shall be improved in the future.  
 2136 Therefore, any PEFCR developed within the EF transition phase (2018-2020) and which has agricultural  
 2137 modelling in scope shall test (as minimum) the following alternative approach:

2138 The N-balance is calculated using the parameters in Table 15 and the formula below. The total NO<sub>3</sub>-N  
 2139 emission to water is considered a variable and its total inventory shall be calculated as:

2140 "Total NO<sub>3</sub>-N emission to water" = "NO<sub>3</sub><sup>-</sup> base loss" + "additional NO<sub>3</sub>-N emissions to water", with

2141 "Additional NO<sub>3</sub>-N emissions to water" = "N input with all fertilisers" + "N<sub>2</sub> fixation by crop" – "N-  
 2142 removal with the harvest" – "NH<sub>3</sub> emissions to air" – "N<sub>2</sub>O emissions to air" – "N<sub>2</sub> emissions to air" -  
 2143 "NO<sub>3</sub><sup>-</sup> base loss".

2144 If in certain low-input schemes the value for "additional NO<sub>3</sub>-N emissions to water" be negative, the value  
 2145 is to be set to "0". Moreover, in such cases the absolute value of the calculated "additional NO<sub>3</sub>-N  
 2146 emissions to water" is to be inventoried as additional N-fertiliser input into the system, using the same  
 2147 combination of N-fertilisers as employed to the analysed crop. This serves to avoid regarding fertility-  
 2148 depleting schemes by capturing the N-depletion by the analysed crop that is assumed to lead to the need  
 2149 for additional fertiliser later on to keep the same soil fertility level.

2150 **Table 15. Alternative approach for nitrogen modelling.**

Emission	Compartment	Value to be applied
NO <sub>3</sub> <sup>-</sup> base loss (synthetic fertiliser and manure)	Water	kg NO <sub>3</sub> <sup>-</sup> = kg N * FracLEACH = 1*0.1*(62/14) = 0.44 kg NO <sub>3</sub> <sup>-</sup> / kg N applied
N <sub>2</sub> O (synthetic fertiliser and manure; direct and indirect)	Air	0.022 kg N <sub>2</sub> O/ kg N fertilizer applied
NH <sub>3</sub> - Urea (synthetic fertiliser)	Air	kg NH <sub>3</sub> = kg N * FracGASF = 1*0.15* (17/14) = 0.18 kg NH <sub>3</sub> / kg N fertilizer applied
NH <sub>3</sub> - Ammonium nitrate (synthetic fertiliser)	Air	kg NH <sub>3</sub> = kg N * FracGASF = 1*0.1* (17/14) = 0.12 kg NH <sub>3</sub> / kg N fertilizer applied
NH <sub>3</sub> - others (synthetic fertiliser)	Air	kg NH <sub>3</sub> = kg N * FracGASF = 1*0.02* (17/14) = 0.024 kg NH <sub>3</sub> / kg N fertilizer applied
NH <sub>3</sub> (manure)	Air	kg NH <sub>3</sub> = kg N * FracGASF = 1*0.2* (17/14) = 0.24 kg NH <sub>3</sub> / kg N manure applied
N <sub>2</sub> -fixation by crop		For crops with symbiotic N <sub>2</sub> -fixation: the fixed amount is assumed to be identical to the N-content in the harvested crop
N <sub>2</sub>	Air	0.09 kg N <sub>2</sub> / kg N applied

### 2151 7.10.6 Heavy metal emissions

2152 Heavy metal emissions from field inputs shall be modelled as emission to soil and/or leaching or erosion to  
2153 water. The inventory to water shall specify the oxidation state of the metal (e.g., Cr<sup>+3</sup>, Cr<sup>+6</sup>). As crops  
2154 assimilate part of the heavy metal emissions during their cultivation clarification is needed on how to  
2155 model crops that act as a sink. Two different modelling approaches are allowed:

- 2156 ● The final fate of the heavy metals elementary flows are not further considered within the system  
2157 boundary: the inventory does not account for the final emissions of the heavy metals and therefore  
2158 shall not account for the uptake of heavy metals by the crop. For example, heavy metals in  
2159 agricultural crops cultivated for human consumption end up in the plant. Within the EF context  
2160 human consumption is not modelled, the final fate is not further modelled and the plant acts as a  
2161 heavy metal sink. Therefore, the uptake of heavy metals by the crop shall not be modelled.
- 2162 ● The final fate (emission compartment) of the heavy metal elementary flows is considered within  
2163 the system boundary: the inventory does account for the final emissions (release) of the heavy  
2164 metals in the environment and therefore shall also account for the uptake of heavy metals by the  
2165 crop. For example, heavy metals in agricultural crops cultivated for feed will mainly end up in the  
2166 animal digestion and used as manure back on the field where the metals are released in the  
2167 environment and their impacts are captured by the impact assessment methods. Therefore, the  
2168 inventory of the agricultural stage shall account for the uptake of heavy metals by the crop. A  
2169 limited amount ends up in the animal (=sink), which may be neglected for simplification.  
2170

### 2171 7.10.7 Rice cultivation

2172 Methane emissions from rice cultivation shall be included based on the calculation rules of IPCC (2006)  
2173 (Volume 4, Chapter 5.5, page 44-53).

### 2174 7.10.8 Peat soils

2175 Drained peat soils shall include carbon dioxide emissions on the basis of a model that relates the drainage  
2176 levels to annual carbon oxidation.

### 2177 7.10.9 Other activities

2178 The following activities shall be included in agricultural modelling, if applicable:

- 2179 ● Input of seed material (kg/ha),
- 2180 ● Input of peat to soil (kg/ha + C/N ratio),
- 2181 ● Input of lime (kg CaCO<sub>3</sub>/ha, type),
- 2182 ● Machine use (hours, type) (to be included if there is high level of mechanisation),
- 2183 ● Input N from crop residues that stay on the field or are burned (kg residue + N content/ha).  
2184 Including emissions from residues burning.

2185 Drying and storage of products shall always be included, unless its exclusion is clearly justified in the PEFCR.  
2186 Unless it is clearly documented that operations are carried out manually, field operations shall be  
2187 accounted for through total fuel consumption or through inputs of specific machinery, transports to/from  
2188 the field, energy for irrigation, etc.

## 2189 7.11 Cattle, sheep, goat, and pork modelling

2190 **DISCLAIMER: The content of section 7.11 is based on the best information made available during the**  
2191 **pilot phase. This information will be used mainly to carry out the re-modelling step of the PEFCRs**  
2192 **developed in the context of the EF pilot phase (2013-2018).**

2193 **It is acknowledged that there are wide margins for improvements both in terms of allocation approaches**  
2194 **and underlying data. This work will be continued during the transition phase (2018-2020).**

2195 This section includes instructions on how to model issues related to farm, slaughterhouse and rendering  
2196 modules for the animals involved in the pilot phase and namely cattle, pig, sheep and goat. In particular,  
2197 instructions will be provided on:

- 2198 1. Allocation of upstream burdens at farm level among outputs leaving the farm
  - 2199 2. Allocation of upstream burdens (linked to live animals) at slaughterhouse among outputs leaving  
2200 the slaughterhouse.
- 2201

### 2202 7.11.1 Allocation within the farm module

2203 At farm module, subdivision shall be used for processes that can be directly attributed to certain outputs  
2204 (e.g. energy use and emissions related to milking processes). When the processes cannot be subdivided  
2205 due to the lack of separate data or because technically impossible, the upstream burden, e.g. feed  
2206 production, shall be allocated to farm outputs using a biophysical allocation method. Default values shall  
2207 be provided for each type of animal and these default values shall be included in the PEFCR and used by  
2208 PEF/OEF studies unless company-specific data are collected. The change of allocation factors is allowed  
2209 only when company-specific data are collected and used for the farm module. In case generic data are used  
2210 for the farm module, no change of allocation factors is allowed and the ones included in this document  
2211 shall be used.

### 2212 7.11.2 Allocation within the farm module for cattle

2213 The IDF 2015<sup>41</sup> allocation method between milk, cull cows and surplus calves shall be used. Dead animals  
2214 and all the products coming from dead animals shall be regarded as waste and the Circular Footprint  
2215 Formula (CFF) shall be applied. In this case, however, the traceability of the products coming from dead  
2216 animals shall be granted in order for this aspect to be taken into consideration into PEF studies.

---

<sup>41</sup> IDF 2015. A common carbon footprint approach for dairy sector: The IDF guide to standard life cycle assessment methodology. Bulletin of the International Dairy Federation 479/2015.

2217 Manure exported to another farm shall be considered as

- 2218 ○ **Residual (default option):** when manure does not have an economic value at the farm  
2219 gate, it is regarded as residual without allocation of an upstream burden. The emissions  
2220 related to manure management up to farm gate are allocated to the other outputs of the  
2221 farm where manure is produced.
- 2222 ○ **Co-product:** when exported manure has economic value at farm gate, an economic  
2223 allocation of the upstream burden shall be used for manure by using the relative economic  
2224 value of manure compared to milk and live animals at the farm gate. Biophysical allocation  
2225 based on IDF rules shall nevertheless be applied to allocate the remaining emissions  
2226 between milk and live animals.
- 2227 ○ **Manure as waste:** when manure is treated as waste (e.g. landfilled), the CFF shall be  
2228 applied.

2229 The allocation factor (AF) for milk shall be calculated using the following equation:

$$2230 \quad AF = 1 - 6.04 * \frac{M_{meat}}{M_{milk}} \quad \text{[Equation 4]}$$

2231

2232 Where  $M_{meat}$  is the mass of live weight of all animals sold including bull calves and culled mature animals  
2233 per year and  $M_{milk}$  is the mass of fat and protein corrected milk (FPCM) sold per year (corrected to 4% fat  
2234 and 3.3% protein). The constant 6.04 describes the causal relationship between the energy content in feed  
2235 in relation to the milk and live weight of animals produced. The constant is determined based on a study  
2236 that collected data from 536 US dairy farms<sup>42</sup>. Although based on US farms, IDF considers that the  
2237 approach is applicable to the European farming systems.

2238 The FPCM (corrected to 4% fat and 3.3% protein) shall be calculated by using the following formula:

2239 [Equation 5]

$$2240 \quad FPCM \left( \frac{kg}{yr} \right) = Production \left( \frac{kg}{yr} \right) * (0.1226 * True Fat \% + 0.0776 * True Protein \% + 0.2534)$$

2241 When a default value of 0.02  $kg_{meat}/kg_{milk}$  for the ratio of live weight of animals and milk produced in  
2242 Equation 4 is used, the equation yields default allocation factors of 12% to live weight of animals and 88%  
2243 to milk (Table 16). These values shall be used as default values for allocating the upstream burdens to milk  
2244 and live weight of animals for cattle when secondary datasets are used. When company-specific data are  
2245 collected for the farming stage, the allocation factors shall be changed using the equations included in this  
2246 section.

---

<sup>42</sup> Thoma et al. (2013). A biophysical approach to allocation of life cycle environmental burdens for fluid milk supply chain analysis. International Dairy Journal 31 (2013)

2247 **Table 16: Default allocation factors for cattle at farming.**

Co-product	Allocation factor
Animals, live weight	12%
Milk	88%

2248 **7.11.3 Allocation within the farm module for the sheep and goat**

2249 A biophysical approach shall be used for the allocation of upstream burdens to the different co-products  
 2250 for sheep and goat. The 2006 IPCC guidelines for national greenhouse gas inventories<sup>43</sup> contain a model to  
 2251 calculate energy requirements that shall be used for sheep and, as a proxy, for goats. This model is applied  
 2252 in the present document.

2253 Dead animals and all the products coming from dead animals shall be regarded as waste and the Circular  
 2254 Footprint Formula (CFF) shall be applied. In this case, however, the traceability of the products coming  
 2255 from dead animals shall be granted in order for this aspect to be taken into consideration into EF studies.

2256 The use of the default allocation factors included in this document is mandatory whenever secondary  
 2257 datasets are used for the life cycle stage of farming for sheep and goat. If company specific data are used  
 2258 for this life cycle stage, then the calculation of the allocation factors with the company specific data shall be  
 2259 performed using the equations provided.

2260 The allocation factors shall be calculated as follows<sup>44</sup>:

2261 
$$\% \text{ wool} = \frac{[\text{Energy for wool } (NE_{wool})]}{[(\text{Energy for wool } (NE_{wool}) + \text{Energy for milk } (NE_l) + \text{Energy for meat } (NE_g))]} \quad [\text{Equation 6}]$$

2262 
$$\% \text{ milk} = \frac{[\text{Energy for milk } (NE_l)]}{[(\text{Energy for wool } (NE_{wool}) + \text{Energy for milk } (NE_l) + \text{Energy for meat } (NE_g))]} \quad [\text{Equation 7}]$$

2263 
$$\% \text{ meat} = \frac{[\text{Energy for meat } (NE_g)]}{[(\text{Energy for wool } (NE_{wool}) + \text{Energy for milk } (NE_l) + \text{Energy for meat } (NE_g))]} \quad [\text{Equation 8}]$$

2264 For the calculation of energy for wool ( $NE_{wool}$ ), energy for milk ( $NE_l$ ) and energy for meat ( $NE_g$ ) with  
 2265 company specific data, the equations included in IPCC<sup>45</sup> and reported below shall be used. In case  
 2266 secondary data are used instead, the default values for the allocation factors provided in this document  
 2267 shall be used.

<sup>43</sup> Dong, H., Mangino, J., McAllister, T.A., Hatfield, J.L., Johnson, D.E., Lassey, K. R.,... Romanoskaya, A. (2006). Chapter 10 Emissions From Livestock And Manure Management. In H.S. Eggleston, L. Buendia, K. Miwa, T. Ngara & K. Tanabe (Eds.), 2006 IPCC Guidelines for National Greenhouse Gas Inventories. Japan: IGES.

<sup>44</sup> The same naming as used in "Dong, H., Mangino, J., McAllister, T.A., Hatfield, J.L., Johnson, D.E., Lassey, K. R.,... Romanoskaya, A. (2006). Chapter 10 Emissions From Livestock And Manure Management. In H.S. Eggleston, L. Buendia, K. Miwa, T. Ngara & K. Tanabe (Eds.), 2006 IPCC Guidelines for National Greenhouse Gas Inventories. Japan: IGES" is used.

<sup>45</sup> Dong, H., Mangino, J., McAllister, T.A., Hatfield, J.L., Johnson, D.E., Lassey, K. R.,... Romanoskaya, A. (2006). Chapter 10 Emissions From Livestock And Manure Management. In H.S. Eggleston, L. Buendia, K. Miwa, T. Ngara & K. Tanabe (Eds.), 2006 IPCC Guidelines for National Greenhouse Gas Inventories. Japan: IGES

2268 **Energy for wool,  $NE_{wool}$**

2269 
$$NE_{wool} = \frac{(EV_{wool} \cdot Production_{wool})}{365}$$
 [Equation 9]

2270

2271  $NE_{wool}$  = net energy required to produce wool, MJ day<sup>-1</sup>

2272  $EV_{wool}$  = the energy value of each kg of wool produced (weighed after drying but before scouring), MJ

2273 kg<sup>-1</sup>. A default value of 157 MJ kg<sup>-1</sup> (NRC, 2007<sup>46</sup>) shall be used for this estimate.<sup>47</sup>

2274  $Production_{wool}$  = annual wool production per sheep, kg yr<sup>-1</sup>

2275 Default values to be used for the calculation of  $NE_{wool}$  and the resulting net energy required are reported in  
2276 Table 17.

2277 **Table 17: Default values to be used for the calculation of  $NE_{wool}$  for sheep.**

Parameter	Value	Source
$EV_{wool}$ - sheep	157 MJ kg <sup>-1</sup>	NRC, 2007
$Production_{wool}$ - sheep	7.121 kg	Average of the four values provided in Table 1 of "Application of LCA to sheep production systems: investigating co-production of wool and meat using case studies from major global producers. Wiedemann et al, Int J. of LCA 2015.
$NE_{wool}$ - sheep	3.063 MJ/d	Calculated using Eq. 9
$NE_{wool}$ - goat	2.784 MJ/d	Calculated from $NE_{wool}$ – sheep using Eq. 12

2278 **Energy for milk,  $NE_l$**

2279 
$$NE_l = Milk \cdot EV_{milk}$$
 [Equation 10]

2280  $NE_l$  = net energy for lactation, MJ day<sup>-1</sup>

2281 Milk = amount of milk produced, kg of milk day<sup>-1</sup>

2282  $EV_{milk}$  = the net energy required to produce 1 kg of milk. A default value of 4.6 MJ/kg (AFRC, 1993) shall be  
2283 used which corresponds to a milk fat content of 7% by weight.

2284

2285

<sup>46</sup> NRC. 2007. Nutrient requirements of small ruminants: Sheep, goats, cervids, and new world camelids. National Research Council. Washington DC, National Academies Press.

<sup>47</sup> The default value of 24 MJ kg<sup>-1</sup> originally included in the IPPC document has been modified into 157 MJ kg<sup>-1</sup> following the indication of FAO - Greenhouse gas emissions and fossil energy demand from small ruminant supply chains Guidelines for quantification, draft for public review, 2014.

2286 **Table 18: Default values to be used for the calculation of NEI for sheep.**

Parameter	Value	Source
$EV_{milk}$ - sheep	4.6 MJ kg <sup>-1</sup>	AFRC, 1993
Milk - sheep	2.08 kg/d	Estimated milk production 550 lbs of sheep milk per year (average value), milk production estimated for 120 days in one year.
$NE_l$ - sheep	9.568 MJ/d	Calculated using Eq. 10
$NE_l$ - goat	8.697 MJ/d	Calculated from $NE_l$ – sheep using Eq. 12

2287  
 2288 **Energy for meat,  $NE_g$**   
 2289

2290 
$$NE_g = WG_{lamb} \cdot \frac{a+0.5b(BW_i+BW_f)}{365} \quad \text{[Equation 11]}$$

2291  
 2292  $NE_g$  = net energy needed for growth, MJ day<sup>-1</sup>  
 2293  $WG_{lamb}$  = the weight gain ( $BW_f - BW_i$ ), kg yr<sup>-1</sup>  
 2294  $BW_i$  = the live bodyweight at weaning, kg  
 2295  $BW_f$  = the live bodyweight at 1-year old or at slaughter (live-weight) if slaughtered prior to 1 year of age, kg  
 2296 a, b = constants as described in Table 19.

2297 Note that lambs will be weaned over a period of weeks as they supplement a milk diet with pasture feed or  
 2298 supplied feed. The time of weaning should be taken as the time at which they are dependent on milk for  
 2299 half their energy supply. The  $NE_g$  equation used for sheep includes two empirical constants (a and b) that  
 2300 vary by animal species/category (Table 19).

2301  
 2302 **Table 19: Constants for use in calculating  $NE_g$  for sheep<sup>48</sup>.**

Animal species/category	a (MJ kg <sup>-1</sup> )	b (MJ kg <sup>-2</sup> )
Intact males	2.5	0.35
Castrates	4.4	0.32
Females	2.1	0.45

2303  
 2304 In case company specific data are used for the farming stage, the allocation factors shall be recalculated. In  
 2305 this case, the parameter "a" and "b" shall be calculated as weighted average when more than one animal  
 2306 category is present.

2307  
 \_\_\_\_\_  
<sup>48</sup> This table corresponds to Table 10.6 in Dong, H., Mangino, J., McAllister, T.A., Hatfield, J.L., Johnson, D.E., Lassey, K. R.,... Romanoskaya, A. (2006). Chapter 10 Emissions From Livestock And Manure Management. In H.S. Eggleston, L. Buendia, K. Miwa, T. Ngara & K. Tanabe (Eds.), 2006 IPCC Guidelines for National Greenhouse Gas Inventories. Japan: IGES.



2308 **Table 20: Default values to be used for the calculation of NE<sub>g</sub> for sheep.**

Parameter	Value	Source
WG <sub>lamb</sub> - sheep	26.2-15=11.2 kg	Calculated
BW <sub>i</sub> - sheep	15 kg	It is assumed that the weaning happens at six weeks. Weight at six weeks read from Figure 1 in "A generic model of growth, energy metabolism and body composition for cattle and sheep", Johnson et al, 2015 – Journal of Animal Science.
BW <sub>f</sub> - sheep	26.2 kg	Average of the values for weight at slaughter, sheep as provided in Appendix 5, Greenhouse gas emissions and fossil energy demand from small ruminant supply chains, FAO 2014.
a - sheep	3	Average of the three values provided in Table 19 <b>Table 19</b>
b - sheep	0.37	Average of the three values provided in Table 19
NE <sub>g</sub> - sheep	0.326 MJ/d	Calculated using Eq. 11
NE <sub>g</sub> - goat	0.296 MJ/d	Calculated from NE <sub>g</sub> – sheep using Eq. 12

2309  
 2310 The default allocation factors to be used in PEFCR and in EF studies for sheep and goat are reported in  
 2311 Table 21 together with the calculations. The same equations<sup>49</sup> and default values used for the calculation of  
 2312 the energy requirements for sheep are used for the calculation of the energy requirements for goats after  
 2313 application of a correction factor.

2314 Net energy requirement, goat = [(goat weight) / (sheep weight)]<sup>0.75</sup> • Net energy requirement, sheep

2315  
 2316 **Sheep weight:** 64.8 kg, average of male and female sheeps for different regions in the world, data from  
 2317 Appendix 5, Greenhouse gas emissions and fossil energy demand from small ruminant supply chains, FAO  
 2318 2014.

2319  
 2320 **Goat weight:** 57.05 kg, average of male and female goats for different regions in the world, data from  
 2321 Appendix 5, Greenhouse gas emissions and fossil energy demand from small ruminant supply chains, FAO  
 2322 2014.

2323 Net energy requirement, goat = [(57.05) / (64.8)]<sup>0.75</sup> • Net energy requirement, sheep [Equation 12]

<sup>49</sup> Page 10.24 of Dong, H., Mangino, J., McAllister, T.A., Hatfield, J.L., Johnson, D.E., Lassey, K. R.,... Romanoskaya, A. (2006). Chapter 10 Emissions From Livestock And Manure Management. In H.S. Eggleston, L. Buendia, K. Miwa, T. Ngara & K. Tanabe (Eds.), 2006 IPCC Guidelines for National Greenhouse Gas Inventories. Japan: IGES

2324  
 2325 **Table 21: Default allocation factors to be used in PEFCR and in EF studies for sheep and goat at farming stage.**

	<b>Sheep</b>	<b>Goat<sup>50</sup></b>
<b>Allocation factor, meat</b>	$\% \text{ meat} = \frac{[(NE_g)]}{[(NE_{wool}) + (NE_l) + (NE_g)]} = 2.52\%$	2.51 %
<b>Allocation factor, milk</b>	$\% \text{ milk} = \frac{[(NE_l)]}{[(NE_{wool}) + (NE_l) + (NE_g)]} = 73.84\%$	73.85%
<b>Allocation factor, wool</b>	$\% \text{ wool} = \frac{[(NE_{wool})]}{[(NE_{wool}) + (NE_l) + (NE_g)]} = 23.64\%$	23.64%

2326 **7.11.4 Allocation within the farm module for pig**

2327 Allocation at farming stage between piglets and sows shall be made applying economic allocation. The  
 2328 default allocation factors to be used are reported below (data from the meat screening study).

2329  
 2330 **Table 22: Allocation at farming stage between piglets and sows**

	<b>Unit</b>	<b>Price</b>	<b>Allocation factors</b>
<b>Piglets</b>	24.8 p	0.95 €/kg live weight	92.63%
<b>Sow to slaughter</b>	84.8 kg	40.80 €/pig	7.37%

2331 **7.11.5 Allocation within the slaughterhouse**

2332 Slaughterhouse and rendering processes produce multiple outputs going to the food and feed chain or to  
 2333 other non-food or feed value chains as the leather industry or chemical or energy recovery chains.

2334 At the slaughterhouse and rendering module, subdivision shall be used for processes that can be directly  
 2335 attributed to certain outputs. When the processes cannot be subdivided, the remaining (e.g. excluding that  
 2336 already allocated to milk for milk producing system and/or to wool for wool producing system) upstream  
 2337 burden shall be allocated to slaughterhouse and rendering outputs using the economic allocation method.  
 2338 Default values for prices and mass fractions are provided for cattle, pigs and small ruminants (sheep, goat)  
 2339 and these default values shall be included in relevant PEFCRs and used by PEF studies and PEF supporting  
 2340 studies. No change of allocation factors is allowed.

2341 **7.11.6 Allocation within the slaughterhouse for cattle**

2342 At the slaughterhouse the allocation factors are established for the categories reported in

---

<sup>50</sup> Allocation factors for goat are calculated starting from the net energy requirements for goat estimated from the net energy requirements for sheep and considering: sheep weight=64.8 kg and goat weight= 57.05 kg.

2343 Table 23. If allocation factors to subdivide the impact of the carcass among the different cuts are desired,  
2344 they shall be defined in the relevant PEFCR.

2345 The by-products from slaughterhouse and rendering can be classified in three categories:

- 2346 • **Category 1:** Risk materials, e.g. infected/contaminated animals or animal by-products
  - 2347 ○ Disposal and use: incineration, co-incineration, landfill, used as biofuel for combustion,
  - 2348 manufacture of derived products
- 2349 • **Category 2:** Manure and digestive tract content, products of animal origin unfit for human  
2350 consumption
  - 2351 ○ Disposal and use: incineration, co-incineration, landfill, fertilisers, compost, biofuels,
  - 2352 combustion, manufacture of derived products
- 2353 • **Category 3:** Carcasses and parts of animals slaughtered and which are fit for human consumption  
2354 but are not intended for human consumption for commercial reasons, include skins and hides  
2355 going for leather industry (note that hides and skins can also belong to other categories depending  
2356 on the condition and nature that is determined by the accompanying sanitary documentation)
  - 2357 ○ Disposal and use: incineration, co-incineration, landfill, feed, pet food, fertilisers, compost,
  - 2358 biofuels, combustion, manufacture of derived products (e.g. leather), oleo-chemicals and
  - 2359 chemicals

2360 The upstream burden to slaughterhouse and rendering outputs shall be allocated as follows:

- 2361 • **Food grade materials:** product with allocation of an upstream burden
- 2362 • **Cat 1 material:** default no allocation of upstream burdens as it is seen as animal by-product treated  
2363 as waste according to the CFF
- 2364 • **Cat 2 material:** default no allocation of upstream burdens as it is seen as animal by-product treated  
2365 as waste according to the CFF
- 2366 • **Cat 3 material going the same way as cat 1 and cat 2** (for fat – to be burned, or bone and meat  
2367 meal) and does not have an economic value at the slaughterhouse gate: default no allocation of  
2368 upstream burdens as it is treated as waste according to the CFF
- 2369 • **Cat 3 skins and hides** (unless they are classified as waste and/or following the same way as cat 1  
2370 and cat2): product with allocation of an upstream burden
- 2371 • **Cat 3 materials, not included in previous categories:** product with allocation of an upstream  
2372 burden

2373 The default values in

2374 Table 23 shall be used in PEFCR, supporting studies and PEF studies. The change of allocation factors is not  
2375 allowed.

2376

2377 **Table 23: Economic allocation ratios for beef (data already included in the CMWG Report)**

	<b>Mass fraction (F)</b>	<b>Price (P)</b>	<b>Economic allocation (EA)</b>	<b>Allocation ratio* (AR)</b>
	%	€/kg	%	
<b>a) Fresh meat and edible offal</b>	49.0	3.00	92.9 <sup>51</sup>	1.90
<b>b) Food grade bones</b>	8.0	0.19	1.0	0.12
<b>c) Food grade fat</b>	7.0	0.40	1.8	0.25
<b>d) Cat. 3 slaughter by-products</b>	7.0	0.18	0.8	0.11
<b>e) Hides and skins</b>	7.0	0.80	3.5	0.51
<b>f) Cat 1/2 material and waste</b>	22.0	0.00	0.0	0.00

2378 \*Allocation ratio (AR) have been calculated as ‘Economic allocation’ divided by ‘Mass fraction’

2379 Allocation ratios (AR) shall be used to calculate the environmental impact of a unit of product by using  
2380 Equation 13.

2381  $EI_i = EI_w * AR_i$  [Equation 13]

2382 Where,  $EI_i$  is the environmental impact per mass unit of product  $i$ , ( $i$  = a slaughterhouse output listed in  
2383 Table 1),  $EI_w$  is the environmental impact of the whole animal divided by live weight mass of the animal and  
2384  $AR_i$  is the allocation ratio for product  $i$  (calculated as economic value of  $i$  divided by mass fraction of  $i$ ).

2385  $EI_w$  shall include upstream impacts, slaughterhouse impacts that cannot be directly attributed to any  
2386 specific products and impacts of waste management. The default values for  $AR_i$  as shown in Table 1 shall be  
2387 used for the EF studies to represent the European average situation.

2388 **7.11.7 Allocation within the slaughterhouse for pigs**

2389 The default values in

2390 Table 24 shall be used in PEFCR, supporting studies and PEF studies dealing with allocation within the  
2391 slaughterhouse for pigs. The change of allocation factors based on company-specific data is not allowed.  
2392 The mass fractions and the prices are taken from the screening study provided by the meat pilot.  
2393

2394 **Table 24: Economic allocation ratios for pigs (from the meat screening study)**

	<b>Mass fraction (F)</b>	<b>Price (P)</b>	<b>Economic allocation (EA)</b>	<b>Allocation ratio* (AR)</b>
	%	€/kg	%	
<b>a) Fresh meat and edible offal</b>	67.0 <sup>52</sup>	1.08	98.67 <sup>53</sup>	1.54
<b>b) Food grade bones</b>	11.0	0.03	0.47	0.04
<b>c) Food grade fat</b>	3.0	0.02	0.09	0.03
<b>d) Cat. 3 slaughter by-products</b>	19.0	0.03	0.77	0.04
<b>e) Hides and skins (categorized in cat.3 products)</b>	0.0	0.00	0	0
<b>Total</b>	100.0		100.0	

2395 **7.11.8 Allocation within the slaughterhouse for sheep and goat**

2396 The default values in Table 25 shall be used in PEFCR, supporting studies and PEF studies dealing with  
 2397 allocation within the slaughterhouse for sheep and goat. The change of allocation factors based on  
 2398 company-specific data is not allowed. The mass fractions and the prices are taken from the screening study  
 2399 made by the meat pilot. Until more reliable data on mass fractions and price for goats are made available,  
 2400 the same allocation factors for the sheep shall be used also for goat.

2401  
 2402 **Table 25: Economic allocation ratios for sheep (from the meat screening study). The same allocation factors shall be used**  
 2403 **also for goat.**

	<b>Mass fraction (F)</b>	<b>Price (P)</b>	<b>Economic allocation (EA)</b>	<b>Allocation ratio* (AR)</b>
	%	€/kg	%	
<b>a) Fresh meat and edible offal</b>	44.0	7	97.8 <sup>54</sup>	2.22
<b>b) Food grade bones</b>	4.0	0.01	0.0127	0.0032
<b>c) Food grade fat</b>	6.0	0.01	0.0190	0.0032

<sup>52</sup> The data in the screening do not sum up to 100%, but to 96%. We have recalculated the percentages to arrive at 100%. To be checked with the meat pilot what happened to the missing 4%

<b>d) Cat. 3 slaughter by-products</b>	13.0	0.15	0.618	0.05
<b>e) Hides and skins (categorized in cat.3 products)</b>	14.0	0.35	1.6	0.11
<b>f) cat ½ material and waste</b>	19	0	0	0
	100		100	

2404 **7.12 Biodiversity**

2405 The current PEF method includes no impact category named "biodiversity". However, the current PEF  
 2406 method includes at least 6 impact categories that have an effect on biodiversity (i.e., climate change,  
 2407 eutrophication aquatic freshwater, eutrophication aquatic marine, acidification, water use, land use). As  
 2408 biodiversity is an important topic on the political agenda, when developing a PEFCR, biodiversity shall be  
 2409 addressed separately (besides the PEF impact categories) through the procedure below:

- 2410 1. When performing the screening study the TS shall make an assessment about the relevance of  
 2411 biodiversity on the product group in scope of the PEFCR. This assessment shall be independent from  
 2412 the results of the PEF impact assessment method and clearly explained in a dedicated section of the  
 2413 screening.
- 2414 2. The PEFCR shall clearly explain in the section on "EF impact assessment" whether biodiversity is  
 2415 considered relevant or not. If the TS determine that there are significant impacts on biodiversity, then  
 2416 they shall describe in this section of the PEFCR how biodiversity impacts shall be assessed and  
 2417 reported by the applicant. The biodiversity results shall be reported under "additional environmental  
 2418 information".

2419 While the TS is free to determine how biodiversity shall be assessed and reported (if relevant), the  
 2420 following suggestions are offered:

- 2421 ● To express the (avoided) impact on biodiversity as the percentage of material that comes from  
 2422 ecosystems that have been managed to maintain or enhance conditions for biodiversity, as  
 2423 demonstrated by regular monitoring and reporting of biodiversity levels and gains or losses (e.g.  
 2424 less than 15% loss of species richness due to disturbance, but the pilots may set their own level  
 2425 provided this is well justified). The assessment should refer to materials that end up in the final  
 2426 products and to materials that have been used during the production process. For example,  
 2427 charcoal that is used in steel production processes, or soy that is used to feed cows that produce  
 2428 dairy etc.
- 2429 ● To report additionally the percentage of such materials for which no chain of custody or  
 2430 traceability information can be found.
- 2431 ● To use a certification system as a proxy. The TS shall determine which certification schemes  
 2432 provide sufficient evidence for ensuring biodiversity maintenance and describe the criteria used. A  
 2433 useful overview of standards can be found on <http://www.standardsmap.org/>.



2434 **7.13 Electricity modelling**

2435 The guidelines in this section shall only be used for those processes where company-specific information is  
2436 collected (situation 1 / Option 1 & situation 2 / Option 1 of the Data Needs Matrix) and shall not be applied  
2437 by PEF CRs that cover electricity as main product (e.g., pilot on photovoltaic system).

2438 **7.13.1 General guidelines**

2439 In PEF studies the following electricity mix shall be used in hierarchical order:

- 2440 (i) Supplier-specific electricity product<sup>55</sup> shall be used if:
- 2441 (a) available, and
- 2442 (b) the set of minimum criteria to ensure the contractual instruments are reliable is  
2443 met.
- 2444 (ii) The supplier-specific total electricity mix shall be used if:
- 2445 (i) available, and
- 2446 (ii) the set of minimum criteria to ensure the contractual instruments are reliable  
2447 is met.
- 2448 (iii) As a last option, the 'country-specific residual grid mix, consumption mix' shall be used  
2449 (available at <http://lcdn.thinkstep.com/Node/>). Country-specific means the country in which  
2450 the life cycle stage occurs. This may be an EU country or non-EU country. The residual grid mix  
2451 characterizes the unclaimed, untracked or publicly shared electricity. This prevents double  
2452 counting with the use of supplier-specific electricity mixes in (i) and (ii).

2453 Note: if for a country, there is a 100% tracking system in place, case (i) shall be applied.

2454 The environmental integrity of the use of supplier-specific electricity mix depends on ensuring that  
2455 contractual instruments (for tracking) **reliably and uniquely convey claims to consumers**. Without this, the  
2456 PEF lacks the accuracy and consistency necessary to drive product/corporate electricity procurement  
2457 decisions and accurate consumer (buyer of electricity) claims. Therefore, a set of minimum criteria that  
2458 relate to the integrity of the contractual instruments as reliable conveyers of environmental footprint  
2459 information has been identified. They represent the minimum features necessary to use supplier-specific  
2460 mix within PEF studies.

2461

2462 **7.13.2 Set of minimal criteria to ensure contractual instruments from suppliers**

2463 The PEF CR shall prescribe that a supplier-specific electricity product/mix may only be used when the  
2464 applicant ensures that any contractual instrument meets the criteria specified below. If contractual  
2465 instruments do not meet the criteria, then country-specific residual electricity consumption-mix shall be  
2466 used in the modelling.

---

<sup>55</sup> See. ISO 14067

2467 The proposed list of criteria below is based on the criteria from the GHG Protocol Scope 2 Guidance – An  
 2468 amendment to the GHG Protocol Corporate Standard – Mary Sotos – World Resource Institute. A  
 2469 contractual instrument used for electricity modelling shall:

2470 **Criterion 1: Convey attributes**

- 2471 ● Convey the energy type mix associated with the unit of electricity produced.
- 2472 ● The energy type mix shall be calculated based on delivered electricity, incorporating certificates  
 2473 sourced and retired on behalf of its customers. Electricity from facilities for which the attributes  
 2474 have been sold off (via contracts or certificates) shall be characterized as having the environmental  
 2475 attributes of the country residual consumption mix where the facility is located.

2476 **Criterion 2: Be a unique claim**

- 2477 ● Be the only instruments that carry the environmental attribute claim associated with that quantity  
 2478 of electricity generated.
- 2479 ● Be tracked and redeemed, retired, or cancelled by or on behalf of the company (e.g. by an audit of  
 2480 contracts, third party certification, or may be handled automatically through other disclosure  
 2481 registries, systems, or mechanisms).

2483 **Criterion 3: Be as close as possible to the period to which the contractual instrument is applied**

2484 Table 26 gives guidance on how to fulfil each criterion.

2485 **Table 26: Minimal criteria to ensure contractual instruments from suppliers**

<b>Criterion 1</b>	<b>CONVEY ENVIRONMENTAL ATTRIBUTES AND GIVE EXPLANATION ABOUT THE CALCULATION METHOD</b> <ul style="list-style-type: none"> <li>● Convey the energy type mix (or other related environmental attributes) associated with the unit of electricity produced.</li> <li>● Give explanation about the calculation method used to determine this mix</li> </ul>
<b>Context</b>	Each program or policy will establish their own eligibility criteria and the attributes to be conveyed. These criteria specify energy resource type and certain energy generation facility characteristics, such as type of technologies, facility ages, or facility locations (but differ from one program/policy to another one). These attributes specify the energy resource type and sometimes some energy generation facility characteristics.
<b>Conditions for satisfying the criterion</b>	1) Convey the energy mix: If there is no energy type mix specified in the contractual instruments, ask your supplier to receive this information or other environmental attributes (GHG emission rate...). If no answer is received, use the 'country-specific residual grid mix, consumption mix'. If an answer is received, go to step 2).

	<p>2) Give explanation about the calculation method used: Ask your supplier to receive calculation method details in order to ensure he follow the above principle. If no information is received, apply the supplier-specific electricity mix, include the information received and document it was not possible to check for double counting.</p>
<p><b>Criterion 2</b></p>	<p><b>UNIQUE CLAIMS</b></p> <ul style="list-style-type: none"> <li>• Be the only instrument that carry the environmental attribute claim associated with that quantity of electricity generation.</li> <li>• Be tracked and redeemed, retired, or cancelled by or on behalf of the company (e.g. by an audit of contracts, third party certification, or may be handled automatically through other disclosure registries, systems, or mechanisms).</li> </ul>
<p>Context</p>	<p>Certificates generally serve four main purposes, including[3] (i) supplier disclosure, (ii) supplier quotas for the delivery or sales of specific energy sources, (iii) tax exemption, (iv) voluntary consumer programs.</p> <p>Each program or policy will establish their own eligibility criteria. These criteria specify certain energy generation facility characteristics, such as type of technologies, facility ages, or facility locations (but differ from one program/policy to another one). Certificates must come from facilities meeting these criteria in order to be eligible for use in that program. In addition, individual country markets or policy-making bodies may accomplish these different functions using a single certificate system or a multi-certificate system.</p>
<p><b>Conditions for satisfying the criterion</b></p>	<ol style="list-style-type: none"> <li>1. Is the plant located in a country with no tracking system? Consult the following report – Table 2: <a href="http://www.reliable-disclosure.org/upload/161-RE-DISS_2014_Residual_Mix_Results_2015-05-15_corrected2.pdf">http://www.reliable-disclosure.org/upload/161-RE-DISS_2014_Residual_Mix_Results_2015-05-15_corrected2.pdf</a>. <ul style="list-style-type: none"> <li>- If yes, use the 'country-specific residual grid mix, consumption mix'</li> <li>- If no, go to the second question</li> </ul> </li> <li>2. Is the plant located in a country with a part of untracked consumption &gt; 95%? <ul style="list-style-type: none"> <li>- If yes, use the 'country-specific residual grid mix, consumption mix' as the best data available to approximate the residual consumption mix</li> <li>- If no, go to the 3<sup>rd</sup> question</li> </ul> </li> <li>3. Is the plant located in a country with a single certificate system or a multi-certificate system? Consult the following report : <a href="https://ec.europa.eu/energy/intelligent/projects/en/projects/e-track-ii">https://ec.europa.eu/energy/intelligent/projects/en/projects/e-track-ii</a> Then : <ul style="list-style-type: none"> <li>- If the plant is located in a region/country with a single certificate system the unique claim criteria is met. Use energy type mix mentioned on the contractual instrument.</li> <li>- If the plant is located in a region/country with a multi-certificate system, the unique claim is not ensured. Contact the country-specific Issuing Body (The European organization which governs the European Energy Certificate System, <a href="http://www.aib-net.org">http://www.aib-net.org</a>) to identify if there is a need to ask for more than one contractual instrument(s) to be sure there is no risk of double counting</li> </ul> </li> </ol>

	<ul style="list-style-type: none"> <li>○ If more than one contractual instruments is needed, request all contractual instruments at the supplier to avoid double counting</li> <li>○ If it is not possible to avoid double counting, report this risk of double counting in the PEF study and use the 'country-specific residual grid mix, consumption mix'.</li> </ul>
<b>Criteria 3</b>	<b>Be issued and redeemed as close as possible to the period of electricity consumption to which the contractual instrument is applied.</b>

2486

### 2487 7.13.3 How to model 'country-specific residual grid mix, consumption mix'

2488 Datasets for residual grid mix, per energy type, per country and per voltage have been purchased by the  
 2489 European Commission and are available in the dedicated node (<http://lcdn.thinkstep.com/Node/>). In case  
 2490 the necessary dataset is not available, the alternative dataset shall be chosen according to the procedure  
 2491 described in section 7.19.5. If no dataset is available, the following approach may be used:

2492 Determine the country consumption mix (e.g. X% of MWh produced with hydro energy, Y% of MWh  
 2493 produced with coal power plant) and combined them with LCI datasets per energy type and country/region  
 2494 (e.g. LCI dataset for the production of 1MWh hydro energy in Switzerland):

- 2495 ○ Activity data related to non-EU country consumption mix per detailed energy type shall be  
 2496 determined based on:
  - 2497 - Domestic production mix per production technologies
  - 2498 - Import quantity and from which neighbouring countries
  - 2499 - Transmission losses
  - 2500 - Distribution losses
  - 2501 - Type of fuel supply (share of resources used, by import and / or domestic supply)

2502 These data may be found in the publications of the International Energy Agency (IEA).

- 2503 ○ Available LCI datasets per fuel technologies in the node.
- 2504 ○ The LCI datasets available are generally specific to a country or a region in terms of:
  - 2505 - fuel supply (share of resources used, by import and / or domestic supply),
  - 2506 - energy carrier properties (e.g. element and energy contents)
  - 2507 - technology standards of power plants regarding efficiency, firing technology, flue-  
 2508 gas desulphurisation, NOx removal and de-dusting.

### 2509 7.13.4 A single location with multiple products and more than one electricity mix

2510 How to proceed if only a part of the electricity use is covered by a supplier-specific mix or on-site electricity  
 2511 generation and how to attribute the electricity mix among products produced at the same location? In  
 2512 general, the subdivision of electricity supply used among multiple products is based on a physical

2513 relationship (e.g. number of pieces or kg of product). If the consumed electricity comes from more than  
2514 one electricity mix, each mix source shall be used in terms of its proportion in the total kWh consumed. For  
2515 example, if a fraction of this total kWh consumed is coming from a specific supplier a supplier-specific  
2516 electricity mix shall be used for this part. See below for on-site electricity use.

2517 A specific electricity type, may be allocated to one specific product in the following conditions:

- 2518 a. The production (and related electricity consumption) of a product occurs in a separate site  
2519 (building), the energy type physical related to this separated site may be used.
- 2520 b. The production (and related electricity consumption) of a product occurs in a shared space with  
2521 specific energy metering or purchase records or electricity bills, the product specific information  
2522 (measure, record, bill) may be used.
- 2523 c. All the products produced in the specific plant are supplied with a public available PEF study. The  
2524 company who wants to make the claim shall make all PEF studies available. The allocation rule  
2525 applied shall be described in the PEF study, consistently applied in all PEF studies connected to the  
2526 site and verified. An example is the 100% allocation of a greener electricity mix to a specific  
2527 product.

#### 2528 **7.13.5 For multiple locations producing one product**

2529 In case a product is produced in different locations or sold in different countries, the electricity mix shall  
2530 reflect *the* ratios of production or ratios of sales between EU countries/regions. To determine the ratio a  
2531 physical unit shall be used (e.g. number of pieces or kg of product). For PEF studies, where such data are  
2532 not available, the average EU residual consumption mix (EU-28 +EFTA), or region representative residual  
2533 mix, shall be used. The same general guidelines mentioned above shall be applied.

#### 2534 **7.13.6 Electricity use at the use stage**

2535 For the use stage the consumption grid mix shall be used. The electricity mix shall reflect the ratios of sales  
2536 between EU countries/regions. To determine the ratio a physical unit shall be used (e.g. number of pieces  
2537 or kg of product). Where such data are not available, the average EU consumption mix (EU-28 +EFTA), or  
2538 region representative consumption mix, shall be used.

#### 2539 **7.13.7 How to deal with on-site electricity generation?**

2540 If on-site electricity production is equal to the site own consumption, two situations apply: the company  
2541 shall:

- 2542 ○ No contractual instruments have been sold to a third party: the applicant shall model its  
2543 own electricity mix (combined with LCI datasets).
- 2544 ○ Contractual instruments have been sold to a third party: the applicant shall use 'country-  
2545 specific residual grid mix, consumption mix' (combined with LCI datasets).

2546 If electricity is produced in excess of the amount consumed on-site within the defined system boundary  
2547 and is sold to, for example, the electricity grid, this system can be seen as a multifunctional situation. The  
2548 system will provide two functions (e.g. product + electricity) and the following rules shall be followed:

- 2549 ○ If possible, apply subdivision.
- 2550 ○ Subdivision applies both to separate electricity productions or to a common electricity production  
2551 where you may allocate based on electricity amounts the upstream and direct emissions to your own  
2552 consumption and to the share you sell out of your company (e.g. if a company has a wind mill on its  
2553 production site and export 30% of the produced electricity, emissions related to 70% of produced  
2554 electricity should be accounted in the PEF study.
- 2555 ○ If not possible, direct substitution shall be used. The country-specific residual consumption electricity  
2556 mix shall be used as substitution<sup>56</sup>.
- 2557 ○ Subdivision is considered as not possible when upstream impacts or direct emissions are closely  
2558 related to the product itself.

2559

### 2560 **7.13.8 Electricity modelling for benchmark calculations**

2561 In benchmark calculations the following electricity mix shall be used in hierarchical order:

- 2562 (i) **Sector specific information on the use of green electricity shall be used if:**
  - 2563 a. available, and
  - 2564 b. the set of minimum criteria to ensure the contractual instruments are reliable is met.  
2565 **This can be combined with the remaining electricity to be modelled with the residual grid mix.**
- 2566 (ii) **In case no sector specific information is available, the consumption grid mix shall be used.**

2567

2568 In case the benchmark is produced in different locations or sold in different countries, the electricity mix  
2569 shall reflect the ratios of production or ratios of sales between EU countries/regions. To determine the  
2570 ratio a physical unit shall be used (e.g. number of pieces or kg of product). Where such data are not  
2571 available, the average EU consumption mix (EU-28 +EFTA), or region representative consumption mix, shall  
2572 be used.

### 2573 **7.14 Modelling transport**

2574 The PEFCR shall provide default transport scenarios to be used in case these data are not listed as  
2575 mandatory company-specific information and supply-chain specific information is not available. The default  
2576 transport scenarios shall reflect the European average transport, including all different transport options  
2577 within the current product category (e.g., home delivery). Future transport options (not existing yet today  
2578 at real scale) shall be excluded. In case no PEFCR-specific data is available the default scenarios and values  
2579 outlined below shall be used.

---

<sup>56</sup> For some countries, this option is a best case rather than a worst case.

2580 Replacement of the default values below with PEFCR-specific values shall be clearly mentioned and  
2581 justified in the PEFCR.

2582 The (final and intermediate) client of the product shall be defined in the PEFCR<sup>57</sup>. The final client may be a  
2583 consumer (i.e. a person who purchases goods and services for personal use) or a company that uses the  
2584 product for final use, such as restaurants, professional painters, or a construction site. Re-sellers and  
2585 importers are intermediate clients and not final clients.

## 2586 **7.14.1 How to allocate the transport burdens**

### 2587 **7.14.1.1 Truck transport**

2588 LCA datasets for truck transport are per tkm (tonne\*km) expressing the environmental impact for 1 tonne  
2589 of product that drives 1km in a truck with certain load. The transport payload (=maximum mass allowed) is  
2590 indicated in the dataset. For example, a truck of 28-32t has a payload of 22t. The LCA dataset for 1tkm  
2591 (fully loaded) expresses the environmental impact for 1 ton of product that drives 1km within a 22t loaded  
2592 truck. The transport emissions are allocated based on the mass of the product transported and you get  
2593 only 1/22 share of the full emissions of the truck. When the mass of a full freight is lower than the load  
2594 capacity of the truck (e.g., 10t), the transport of the product may be considered volume limited. In this  
2595 case, the truck has less fuel consumption per total load transported and the environmental impact per ton  
2596 of product is 1/10 share of the total emissions of the volume limited truck. Within the EF-compliant  
2597 transport datasets available at <http://lcdn.thinkstep.com/Node/>, the transport payload is modelled in a  
2598 parameterised way through the utilisation ratio. The utilisation ratio is calculated as the kg real load  
2599 divided by the kg payload and shall be adjusted upon the use of the dataset. In case the real load is 0 kg, a  
2600 real load of 1 kg shall be used to allow the calculation. Note that default truck volumes cannot be provided  
2601 as this strongly depends on the type of material transported. In case truck volumes are needed to calculate  
2602 the volume limited transport load, PEFCR-specific data should be used.

2603 The PEFCR shall specify the utilisation ratio to be used for each truck transport modelled, as well clearly  
2604 indicate whether the utilisation ratio includes empty return trips.

- 2605 ● If the load is mass limited: a default utilisation ratio of 64%<sup>58</sup> shall be used. This utilisation ratio  
2606 includes empty return trips. Therefore, empty returns shall not be modelled separately. The PEFCR  
2607 shall list the truck dataset as indicated on the node, together with the utilisation factor to be used  
2608 (64%). The PEFCR shall clearly indicate that the user shall check and adapt the utilisation factor.
- 2609 ● If the load is volume limited **and the full volume is used**: the PEFCR shall indicate the company-  
2610 specific utilisation ratio calculated as the kg real load/kg payload of the dataset and indicate how  
2611 empty returns shall be modelled.

---

<sup>57</sup> A clear definition of the final client facilitates a correct interpretation of the PEFCR by practitioners which will enhance the comparability of results.

<sup>58</sup> Eurostat 2015 indicates that 21% of the kms truck transport are driven with empty load and 79% are driven loaded (with an unknown load). In Germany only, the average truck load is 64%.

- 2612       • If the load is delicate (e.g. flowers): the full truck volume might not be used. The PEFCR shall  
2613 evaluate the most appropriate load factor to be applied.
- 2614       • Bulk transport (e.g., gravel transport from mining pit to concrete plant) shall be modelled with a  
2615 default utilisation ratio of 50% (100% loaded outbound and 0% loaded inbound).
- 2616       • Reusable products and packaging shall be modelled with PEFCR-specific utilisation ratios. The  
2617 default value of 64% (including empty return) cannot be used because the return transport is  
2618 modelled separately for reusable products.

#### 2619 **7.14.1.2 Van transport**

2620 Vans are often used for home delivery products like books and clothes or home delivery from retailers. For  
2621 vans the mass is never a limiting factor, but rather the volume, where often the van is half empty.  
2622 Therefore, a default utilisation ratio of 50% shall be used<sup>59</sup>. A lorry of <7.5t shall be used as approximation,  
2623 with an utilisation ratio of 20%. A lorry of <7.5t with a payload of 3.3t and an utilisation ratio of 20%, comes  
2624 to the same load as a van with payload of 1.2t and utilisation ratio of 50%.

#### 2625 **7.14.1.3 Consumer transport**

2626 LCA datasets for consumer transport (typically, passenger car) are per km. In the PEF context the allocation  
2627 of the car impact shall be based on volume. The maximum volume to be considered for consumer  
2628 transport is 0.2 m<sup>3</sup> (around 1/3 of a trunk of 0.6 m<sup>3</sup>). For products larger than 0.2 m<sup>3</sup> the full car transport  
2629 impact shall be considered. For products sold through supermarkets or shopping malls, the product volume  
2630 (including packaging and empty spaces such as between fruits or bottles) shall be used to allocate the  
2631 transport burdens over the product transported. The allocation factor shall be calculated as the volume of  
2632 the product transported divided by 0.2 m<sup>3</sup>. For simplification, all other types of consumer transport (like  
2633 buying in specialised shops or using combined trips) shall be modelled as through supermarket. The PEFCR  
2634 shall prescribe the default allocation value to be used.

#### 2635 **7.14.2 From supplier to factory**

2636 The PEFCR shall specify default transport distance to be used for the transport of product from supplier to  
2637 factory. If specific data are not included in the PEFCR, then the default data provided below shall be used.

2638 For suppliers located within Europe:

2639 For packaging materials from manufacturing plants to filler plants (beside glass; values based on Eurostat  
2640 2015<sup>60</sup>), the following scenario shall be used:

- 2641       • 230 km by truck (>32 t, EURO 4; UUID 938d5ba6-17e4-4f0d-bef0-481608681f57), PEFCR specific  
2642 utilisation ratio; and

---

<sup>59</sup> as no EF-compliant dataset for van transport (with payload of ± 1.2t) is currently available at <http://lcdn.thinkstep.com/Node/>).

<sup>60</sup>Calculated as the mass weighted average of the goods categories 06, 08 and 10 using the Ramon goods classification for transport statistics after 2007. The category 'non-metallic mineral products' are excluded as they can double count with glass.



- 2643 ● 280 km by train (average freight train; UUID 02e87631-6d70-48ce-affd-1975dc36f5be); and  
2644 ● 360 km by ship (barge; UUID 4cfacea0-cce4-4b4d-bd2b-223c8d4c90ae).

2645 For transport of empty bottles (communication from FEVE<sup>61</sup>), the following scenario shall be used:

- 2646 ● 350 km by truck (>32 t, EURO 4; UUID 938d5ba6-17e4-4f0d-bef0-481608681f57), PEFCR specific  
2647 utilisation ratio; and  
2648 ● 39 km by train (average freight train; UUID 02e87631-6d70-48ce-affd-1975dc36f5be); and  
2649 ● 87 km by ship (barge; UUID 4cfacea0-cce4-4b4d-bd2b-223c8d4c90ae).

2650 For all other products from supplier to factory (values based on Eurostat 2015<sup>62</sup>), the following scenario  
2651 shall be used:

- 2652 ● 130 km by truck (>32 t, EURO 4; UUID 938d5ba6-17e4-4f0d-bef0-481608681f57), PEFCR specific  
2653 utilisation ratio; and  
2654 ● 240 km by train (average freight train; UUID 02e87631-6d70-48ce-affd-1975dc36f5be); and  
2655 ● 270 km by ship (barge; UUID 4cfacea0-cce4-4b4d-bd2b-223c8d4c90ae).

2656 For all suppliers located outside Europe, the following scenario shall be used:

- 2657 ● 1000 km by truck (>32 t, EURO 4; UUID 938d5ba6-17e4-4f0d-bef0-481608681f57), for the sum of  
2658 distances from harbour/airport to factory outside and inside Europe. PEFCR specific utilisation  
2659 ratio; and  
2660 ● 18000 km by ship (transoceanic container; UUID 6ca61112-1d5b-473c-abfa-4accc66a8a63) or  
2661 10'000 km by plane (cargo; UUID 1cc5d465-a12a-43da-aa86-a9c6383c78ac).  
2662 ● If producers country (origin) is known: the adequate distance for ship and airplane should be  
2663 determined using <http://www.searates.com/services/routes-explorer> or  
2664 [https://co2.myclimate.org/en/flight\\_calculators/new](https://co2.myclimate.org/en/flight_calculators/new)

2665 In case it is unknown if the supplier is located within or outside Europe, the transport shall be modelled as  
2666 supplier being located outside Europe.

### 2667 **7.14.3 From factory to final client**

2668 The transport from factory to final client (including consumer transport) shall be included in the  
2669 distribution stage of the PEFCR. This helps fair comparisons between products delivered through traditional  
2670 shops as well as delivered at home.

---


<sup>61</sup> Based on the peer reviewed LCA study of the European container glass, FEVE 2016. Primary data collected among 84% of the European container glass manufactures.

<sup>62</sup> Calculated as the mass weighted average of the goods of all categories.

2671 In case no PEFCR-specific transport scenario is available, the default scenario outlined below shall be used  
 2672 as a basis (see Figure 3) together with a number of PEFCR-specific values:

- 2673 ● Ratio between products sold through retail, distribution centre (DC) and directly to the final client;
- 2674 ● For factory to final client: Ratio between local, intracontinental and international supply chains;
- 2675 ● For factory to retail: distribution between intracontinental and international supply chains;

2677 The PEFCR-specific values may be replaced by supply-chain-specific information following the Data Needs  
 2678 Matrix (DNM).

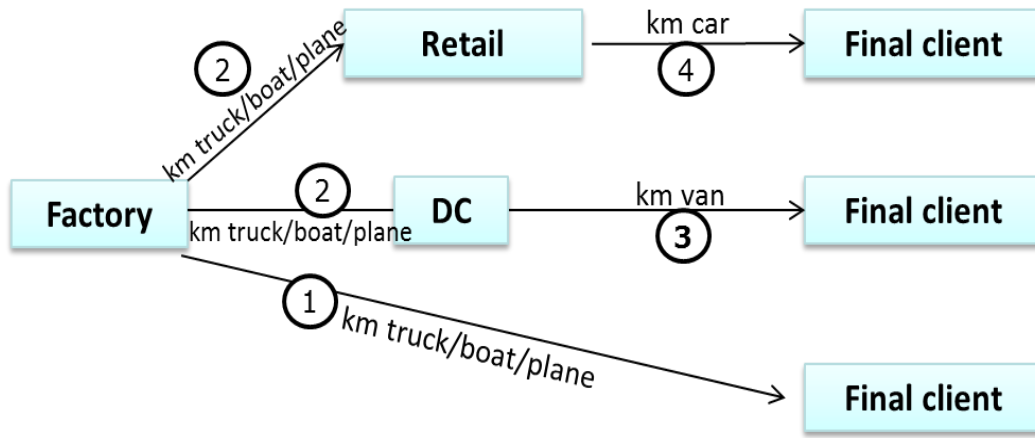

2679  
 2680 **Figure 3: default transport scenario.**

2681 (1) X% (PEFCR specific) from factory to final client:

- 2682 ● X% (PEFCR specific) local supply chain: 1'200 km by truck (>32 t, EURO 4; UUID 938d5ba6-17e4-4f0d-bef0-481608681f57), PEFCR specific utilisation ratio.
- 2683
- 2684 ● X% (PEFCR specific) intracontinental supply chain: 3'500 km by truck (>32 t, EURO 4; UUID 938d5ba6-17e4-4f0d-bef0-481608681f57), PEFCR specific utilisation ratio.
- 2685
- 2686 ● X% (PEFCR specific) international supply chain: 1'000 km by truck (>32 t, EURO 4; UUID 938d5ba6-17e4-4f0d-bef0-481608681f57), PEFCR specific utilisation ratio and 18'000 km by ship (transoceanic container; UUID 6ca61112-1d5b-473c-abfa-4accc66a8a63). Note that for specific cases, plane or train may be used instead of ship.
- 2687
- 2688
- 2689

2690 (2) X% (PEFCR specific) from factory to retail/DC:

- 2691 ● X% (PEFCR specific) local supply chain: 1'200 km by truck (>32 t, EURO 4; UUID 938d5ba6-17e4-4f0d-bef0-481608681f57), PEFCR specific utilisation ratio.
- 2692
- 2693 ● X% (PEFCR specific) intracontinental supply chain: 3'500 km by truck (>32 t, EURO 4; UUID 938d5ba6-17e4-4f0d-bef0-481608681f57) (Eurostat 2014), PEFCR specific utilisation ratio.
- 2694
- 2695 ● X% (PEFCR specific) international supply chain: 1'000 km truck (>32 t, EURO 4; UUID 938d5ba6-17e4-4f0d-bef0-481608681f57), PEFCR specific utilisation ratio and 18'000 km by ship
- 2696

2697 (transoceanic container; UUID 6ca61112-1d5b-473c-abfa-4accc66a8a63). Note that for specific  
2698 cases, plane or train may be used instead of ship.

2699 (3) X% (PEFCR specific) from DC to final client:

2700 ● 100% Local: 250 km round trip by van (lorry <7.5t, EURO 3, utilisation ratio of 20%; UUID aea613ae-  
2701 573b-443a-aba2-6a69900ca2ff)

2702 (4) X% (PEFCR specific) from retail to final client:

2703 ● 62%: 5 km, by passenger car (average; UUID 1ead35dd-fc71-4b0c-9410-7e39da95c7dc), PEFCR  
2704 specific allocation

2705 ● 5%: 5 km round trip, by van (lorry <7.5t, EURO 3 with utilisation ratio of 20%<sup>63</sup>; UUID aea613ae-  
2706 573b-443a-aba2-6a69900ca2ff)

2707 ● 33%: no impact modelled

2708 Note that for reusable products the return transport from retail/DC to factory shall be modelled in addition  
2709 to the transport needed to go to retail/DC. The same transport distances as from product factory to final  
2710 client shall be used (see above), however the truck utilisation ratio might be volume limited depending on  
2711 the type of product. The PEFCR shall indicate the utilisation ratio to be used for the return transport.

#### 2712 **7.14.4 From EOL collection to EOL treatment**

2713 The transport from collection place to EOL treatment is included in the landfill, incineration and recycling  
2714 datasets tendered by the EC. However, there are some cases, where additional default data might be  
2715 needed by the PEFCR. The following values shall be used in case no better data is available:

2716 ● Consumer transport from home to sorting place: 1 km by passenger car (UUID 1ead35dd-fc71-  
2717 4b0c-9410-7e39da95c7dc)<sup>63</sup>

2718 ● Transport from collection place to methanisation: 100 km by truck (>32 t, EURO 4; UUID 938d5ba6-  
2719 17e4-4f0d-bef0-481608681f57)

2720 ● Transport from collection place to composting: 30 km by truck (lorry <7.5t, EURO 3 with UUID  
2721 aea613ae-573b-443a-aba2-6a69900ca2ff)

#### 2722 **7.14.5 Transport processes for cooled and frozen product**

2723 Note that the transport processes from factory to final client, DC and retail suggested above are for  
2724 products at ambient temperature only. Products frozen or cooled are to be transported in freezers or  
2725 coolers. These datasets are available at <http://lcdn.thinkstep.com/Node/>.

---

<sup>63</sup> Assumption (Justification: 75% of households do not need to "move" their waste, or can simply do it by walking. However 25% of the households do about 4 km by car to bring their waste to a local collection place (whether for trash or for recycling), which corresponds in average for all waste to 1 km by car).

2726 **7.15 Modelling infrastructure and equipment**

2727 For screening all processes shall be included in the modelling without applying any cut-off. For the  
2728 screening studies, where appropriate, the following default modelling approaches shall be used in case no  
2729 better data is available. Note that the below data and values are based on assumptions (except indicated  
2730 otherwise). For all other infrastructures and equipment not included below, the modelling assumptions  
2731 and secondary datasets used shall be clearly documented.

2732 **7.15.1 Distribution centre (DC)**

- 2733
- 2734 ● Infrastructure and building: a distribution centre is a 30000 m<sup>2</sup> building, 5 m high, and with a 30000  
2735 m<sup>2</sup> parking. Fridges and freezers equipment (production and end-of-life) shall be considered for  
2736 DCs that contains cooling systems. Default data for fridge or freezer production of 1m<sup>3</sup> external  
2737 volume and an internal storage space of 210 L (15 years lifetime): 20 kg iron, 1.5 kg aluminium, 7.8  
2738 kg compressor, 0.01 kg copper, 0.06 kg cables, 0.3 kg glass, 6 kg plastic, 1 kg oil, 4 kg insulating  
2739 foam, 1.1 kg water, 0.04 kg pollutant (using mercury as proxy) (Swiss Energy, October 2012).  
2740 Packaging: 4 kg cardboard, 0.5 kg plastic film (LDPE), along with a 50 g paper notice.
  - 2741 ● Energy consumption: the storage energy consumption is 30 kWh/m<sup>2</sup>-year and 360 MJ bought (=  
2742 burnt in boiler) or 10 Nm<sup>3</sup> natural gas/m<sup>2</sup>-year (if using the value per Nm<sup>3</sup>, do not forget to consider  
2743 emissions from combustion and not only production of natural gas). For DCs that contain cooling  
2744 systems an additional energy use for the chilled or frozen storage is 40 kWh/m<sup>3</sup>-year (with an  
2745 assumption of 2 m high for the fridges and freezers). For DCs with both ambient and cooled  
2746 storage: 20% of the area of the DC is chilled or frozen. Note: the energy for chilled or frozen  
2747 storage is only the energy to “keep cool”.
  - 2748 ● Refrigerant gases consumption and leakages for DCs that contains cooling systems: gas content in  
2749 fridges and freezers is 0.29 kg R404A per m<sup>2</sup> (retail PEFCR). A 10% annual leakage is considered  
2750 (Palandre 2003). For the portion of refrigerant gases remaining in the equipment at end-of-life, 5%  
2751 is emitted at end-of-life and the remaining fraction is treated as hazardous waste.
  - 2752 ● Water: 365 m<sup>3</sup> of water is used per year for activities such as cleaning, lawn irrigation, etc. The  
2753 production of this amount of tap water as well as its treatment in wastewater treatment plant shall  
2754 be considered.
  - 2755 ● Allocation of the DC space-time per product: The distribution centre impact per product is  
2756 calculated using an allocation based on the total storage capacity of the distribution centre. An  
2757 average distribution centre can store 60000 m<sup>3</sup> of product, being 48'000 m<sup>3</sup> for ambient storage  
2758 and 12000 m<sup>3</sup> for chilled or frozen storage (assuming 50% of the 30000 m<sup>2</sup> building is dedicated to  
2759 storage on 4 m high). Storage during 52 weeks, i.e., 3120000 m<sup>3</sup>-weeks/year. The total storage  
2760 capacity shall be allocated with the following storage volumes and times:
    - 2761 ○ For ambient products: 4 times the product volume \* stored 4 weeks
    - 2762 ○ For chilled products: 3 times the product volume \* stored 1 week
    - For frozen products: 2 times the product volume \* stored 4 weeks

## 2763 7.15.2 Retail space

2764 In case there is no specialization of retail, the default data presented below shall be used in the modelling.

- 2765
- 2766
- 2767
- 2768
- 2769
- 2770
- 2771
- 2772
- 2773
- 2774
- 2775
- 2776
- 2777
- 2778
- 2779
- 2780
- 2781
- 2782
- 2783
- 2784
- 2785
- 2786
- 2787
- 2788
- 2789
- 2790
- 2791
- 2792
- 2793
- 2794
- 2795
- 2796
- **Infrastructure:** A retail centre shall be modelled as a 2000 m<sup>2</sup> building with 4000 m<sup>2</sup> parking (the value for parking includes both employees and clients parking as well as all infrastructures such as the access road, area for delivery, etc.)
  - **Fridges and freezers in case of cooling:** 60 m<sup>2</sup> fridges and 60 m<sup>2</sup> freezer, 2 m high, i.e., 240 m<sup>3</sup> fridges measured as external volume with 50% being “internal storage volume” (= 120 m<sup>3</sup>). Default data for fridge or freezer production of 1m<sup>3</sup> external volume and an internal storage space of 210 L (15 years lifetime): 20 kg iron, 1.5 kg aluminium, 7.8 kg compressor, 0.01 kg copper, 0.06 kg cables, 0.3 kg glass, 6 kg plastic, 1 kg oil, 4 kg insulating foam, 1.1 kg water, 0.04 kg pollutant (using mercury as proxy) (Swiss Energy, October 2012). Packaging: 4 kg cardboard, 0.5 kg plastic film, along with a 50 g paper notice.
  - **Energy consumption<sup>64</sup>:** A general energy consumption of 300 kWh/m<sup>2</sup>·year for the entire building surface. For retail specialized in non-food/non-beverage products: 150 kWh/m<sup>2</sup>·year for the entire building surface. For retail specialized in food/beverage products: 400 kWh/m<sup>2</sup>·year for the entire building surface plus energy consumption for chilled and frozen storage of 1900 kWh/m<sup>2</sup>·year and 2700 kWh/m<sup>2</sup>·year respectively.
  - **Refrigerant gases:** Gas content in fridges and freezers is 0.29 kg R404A per m<sup>2</sup>. The production and end-of-life, as well as the leakages shall be considered and 10% annual leakage (Palandre 2003). For the portion of refrigerant gases remaining in the equipment at end-of-life, 5% are assumed to be emitted at end-of-life and the remaining fraction is treated as hazardous waste.
  - **Water:** 3'650 m<sup>3</sup> of water is used per year for activities such as cleaning, customer bathrooms, lawn irrigation, etc. The production of this amount of tap water as well as its treatment in wastewater treatment plant shall be considered.
  - **Allocation of the retail space-time per product:** A retail place can store 2'000 m<sup>3</sup> of products (assuming 50% of the 2'000 m<sup>2</sup> building is covered by shelves of 2 m high) during 52 weeks, i.e., 104000 m<sup>3</sup>·weeks/year. The total storage capacity shall be allocated with the following storage volumes and times:
    - For ambient products: 4 times the product volume \* stored 4 weeks
    - For chilled products: 3 times the product volume \* stored 2 weeks
    - For frozen products: 2 times the product volume \* stored 4 weeks
  - **Repacking:** consuming about 3 t plastic film (LDPE) per supermarket per year. The production and end-of-life (100% recycling) of LDPE packaging film shall be considered. This represents a default value of 0.47 g LDPE film / kg of product<sup>65</sup>.

---

<sup>64</sup>Derived from table 17, p. 59, of the PERIFEM and ADEME “Guide sectorial 2014: Réalisation d’un bilan des émissions de gaz à effet de serre pour distribution et commerce de détail”.

<sup>65</sup>The virtual retailer considered for the OEF retail screening sells about 6370 tons products per supermarket per year.

2797 **7.15.3 Fridge**

- 2798 ● Fridge size: assumed to 1 m<sup>3</sup> (external volume, measured as a rectangular cuboid including space  
2799 lost due to protuberances, for example to calculate its space use in a DC or in a truck during  
2800 delivery) and with an internal storage space of 210 L.
- 2801 ● Material composition: 20 kg iron, 1.5 kg aluminium, 7.8 kg compressor, 0.01 kg copper, 0.06 kg  
2802 cables, 0.3 kg glass, 6 kg plastic, 1 kg oil, 4 kg insulating foam, 1.1 kg water, 0.04 kg pollutant (using  
2803 mercury as proxy) (Swiss Energy, October 2012). Packaging is assumed to be made of 4 kg  
2804 cardboard, 0.5 kg plastic film, along with a 50 g paper notice.
- 2805 ● Fridge maintenance: assumed to be 12 washings per year (with 1 L water and 1 g soap for each  
2806 washing).
- 2807 ● Refrigerant gas: about 100 g R134a/fridge and 1% leakage (IPCC/TEAP 2005) (note that when the  
2808 fridge is used as a proxy for cooling infrastructure in DCs and retailer, the refrigerant gas  
2809 production and leakage should be removed to avoid double counting with the values used directly  
2810 in the modelling of DCs and retailer).

2811 **7.15.4 Dishwasher**

- 2812 ● Material composition: 10 kg plastic, 20 kg steel, 15 kg aluminium, 3 kg electronic components, 0.1  
2813 kg printed wiring board. Packaging is assumed to be 10 kg cardboard and 2 kg plastic.
- 2814 ● A fraction of a cycle is allocated depending on the dish size (assumptions):
  - 2815 ○ 20% for a pot, a baking dish or a frying pan
  - 2816 ○ 14.3% for a medium pan
  - 2817 ○ 10% for a small pan or a vase
  - 2818 ○ 5% for a drip filter decanter, a pet food dish or an ashtray
  - 2819 ○ 3.3% for a bowl
  - 2820 ○ 2.5% for a glass, a mug, a tea cup or a normal plate
  - 2821 ○ 1.67% for a small plate or an espresso cup
  - 2822 ○ 0.5% for each cutlery piece

2823 **7.15.5 Small equipment to be considered**

- 2824 ● Frying pan: 1 kg steel and 200 g plastic. Lifetime: 500 uses
- 2825 ● Cooking pot: 1 kg steel and 100 g plastic. Lifetime: 1500 uses
- 2826 ● Glass: 260 g glass. Lifetime: 365 uses
- 2827 ● Baking sheet: 200 g steel. Lifetime: 780 uses
- 2828 ● Cup: 260 g ceramic. Lifetime: 365 uses
- 2829 ● Pet food dish: 200 g plastic. Lifetime: 3650 uses

- 2830 • Polypropylene plastic bag for general trash: 6.7g PP per kg of waste (35 g plastic for a 35 L bag, own  
2831 measurement; average municipal solid waste density is 150 kg/m<sup>3</sup>)<sup>66</sup>
- 2832 • Polypropylene plastic bag for recycled green waste and food waste: 2.5g PP per kg of waste (35 g  
2833 plastic for a 35 L bag, own measurement). The average green/food waste density is 400 kg/m<sup>3</sup>)<sup>67</sup>

## 2834 7.16 Packaging modelling

### 2835 7.16.1 Packaging datasets

2836 A large number of EF-compliant packaging related datasets are available on the node  
2837 (<http://lcdn.thinkstep.com/Node>). These European average packaging datasets shall be used in case the  
2838 PEFCR doesn't request the use of primary data, no supplier-specific information is available or the  
2839 packaging is not relevant. Although the default secondary datasets shall be listed in the PEFCR to be used  
2840 by the applicants, for some multi-material packaging the PEFCR should or shall provide additional  
2841 information to allow the applicant to perform a correct modelling. This is the case for beverage cartons and  
2842 bag-in-box packaging.

2843 Beverage cartons are made out of LDPE granulates and liquid packaging board, with or without aluminium  
2844 foil. The amount of LDPE granulates, board and foil (also called the bill of material of beverage cartons)  
2845 depends on the application of the beverage carton and shall be defined in the PEFCR (e.g., wine cartons,  
2846 milk cartons). Beverage cartons shall be modelled by combining the prescribed amounts of material  
2847 datasets with the beverage carton conversion dataset.

2848 Bag in box is made out of corrugated board and packaging film. The PEFCR should define the amount of  
2849 corrugated board, as well as the amount and type of packaging film. If this is not prescribed by the PEFCR,  
2850 the applicant applying the PEFCR shall use the default dataset for bag-in-box.

### 2851 7.16.2 Packaging reuse rates

2852 Reuse rate is the number of times a packaging material is used (e.g., filled) at the factory. This is often also  
2853 called trip rates, reuse time or number of rotations. This may be expressed as the absolute number of  
2854 reuse or as % of reuse rate. For example: a reuse rate of 80% equals 5 reuses. Equation 14 describes the  
2855 conversion:

$$2856 \text{ Number of reuse} = \frac{1}{100\% - \% \text{ reuse rate}} \quad [\text{Equation 14}]$$

<sup>66</sup><http://www.senat.fr/rap/o98-415/o98-4151.html>, <http://www.ic.gc.ca/eic/site/csr-rse.nsf/eng/rs00181.html>,  
<http://www.ijastnet.com/journals/Vol.1.No.3;June.2011/8.pdf>,

[http://www.academia.edu/3013719/Comprehensive\\_Characteristics\\_of\\_the\\_Municipal\\_Solid\\_Waste\\_Generated\\_in\\_the\\_Faculty\\_of\\_Engineering\\_UKM](http://www.academia.edu/3013719/Comprehensive_Characteristics_of_the_Municipal_Solid_Waste_Generated_in_the_Faculty_of_Engineering_UKM), [http://www.unep.or.jp/ietc/ESTdir/Pub/MSW/RO/Latin\\_A/Topic\\_g.asp](http://www.unep.or.jp/ietc/ESTdir/Pub/MSW/RO/Latin_A/Topic_g.asp)

<sup>67</sup><http://www.epa.vic.gov.au/business-and-industry/lower-your-impact/~media/Files/bus/EREP/docs/wastematerials-densities-data.pdf>

2857 The number of reuse applied here refers to the total number of uses during the life of a packaging. It  
2858 includes both the first use and all the following reuses.

2859 A packaging return system can be organized by the company owning the packaging material (company  
2860 owned pools) or can be organized at a higher level by a third party e.g., the government or a pooler (third  
2861 party operated pools). This may have an influence on the lifetime of the material as well as the data source  
2862 to be used. Therefore, it is important to separate these two return systems.

2863 For company owned packaging pools the reuse rate shall be calculated using supply-chain-specific data.  
2864 Depending on the data available within the company, two different calculation approaches may be used  
2865 (see Option a and b presented below). Returnable glass bottles are used as example but the calculations  
2866 also apply for other company owned reusable packaging.

2867 **Option a:** The use of supply-chain-specific data, based on accumulated experience over the lifetime of the  
2868 previous glass bottle pool. This is the most accurate way to calculate the reuse rate of bottles for the  
2869 previous bottle pool and can be a proper estimate for the current bottle pool. The following supply-chain-  
2870 specific data is collected (see wiki page 'Access to documents of common interest'  
2871 <https://webgate.ec.europa.eu/fpfis/wikis/display/EUENVFP/>):

- 2872 ● Number of bottles filled during the lifetime of the bottle pool (#Fi)
  - 2873 ● Number of bottles at initial stock plus purchased over the lifetime of the bottle pool (#B)
- 2874

2875 Reuse rate of the bottle pool  $= \frac{\# F_i}{\# B}$  [Equation 15]

2876 The net glass use (kg glass/l beverage)  $= \frac{\# B \times (\text{kg glass/bottle})}{\# F_i}$  [Equation 16]

2877 This calculation option shall be used:

- 2878 i. With data of the previous bottle pool when the previous and current bottle pool are comparable.  
2879 Meaning, the same product category, similar bottle characteristics (e.g., size), comparable return  
2880 systems (e.g., way of collection, same consumer group and outlet channels), etc.
- 2881 ii. With data of the current bottle pool when future estimations/extrapolations are available on (i) the  
2882 bottle purchases, (ii) the volumes sold, and (iii) the lifetime of the bottle pool.

2883 The data shall be supply-chain-specific and shall be verified by an external verification, including the  
2884 reasoning of this method choice.

2885 **Option b:** When no real data is tracked the calculation shall be done partly based on assumptions. This  
2886 option is less accurate due to the assumptions made and therefore conservative/safe estimates shall be  
2887 used. The following data is needed:



- 2888 ● Average number of rotations of a single bottle, during one calendar year (if not broken). One loop  
 2889 consists of filling, delivery, use, back to brewer for washing (#Rot)  
 2890 ● Estimated lifetime of the bottle pool (LT, in years)  
 2891 ● Average percentage of loss per rotation. This refers to the sum of losses at consumer and the  
 2892 bottles scrapped at filling sites (%Los)

2893

2894 Reuse rate of the bottle pool = 
$$\frac{LT}{(LT \times \%Los) + \left(\frac{1}{\#Rot}\right)}$$
 [Equation 17]

2895 This calculation option shall be used when option a) is not applicable (e.g., the previous pool is not usable  
 2896 as reference). The data used shall be verified by an external verification, including the reasoning of this  
 2897 method choice.

2898 **7.16.2.1 Average reuse rates for company owned pools**

2899 The following average reuse rates shall be used within the screening studies and to calculate the  
 2900 benchmark (corresponding to the representative product) for those PEFCRs that have company owned  
 2901 reusable packaging pools in scope, unless data of better quality is available:

- 2902 ● Glass bottles: 20 trips for beer and water bottles<sup>68</sup>, 2 trips for wine<sup>69</sup>  
 2903 ● Plastic crates for bottles: 30 trips<sup>70</sup>  
 2904 ● Plastic pallets: 30 trips (Nederlands Instituut voor Bouwbiologie en Ecologie, 2014<sup>71</sup>)  
 2905

2906 If the TS decide to use other values within their PEF screening study or benchmark calculation, they shall  
 2907 clearly justify why and provide the data source. In case a specific packaging type is not present in the list  
 2908 above, sector-specific data shall be used. New values shall be subject to the PEFCR review.

2909 **7.16.2.2 Average reuse rates for third party operated pools**

2910 Average reuse rates provided by literature vary a lot, are not usable as such or too country specific. Some  
 2911 data sources are outdated (more than 15 years old) and thus not representative for the current situation  
 2912 (<http://ec.europa.eu/environment/waste/studies/reuse.htm>). Some others are biased due to a significant  
 2913 change in consumer behaviour. For example, the return rate of beer bottles in Denmark is higher than  
 2914 100% due to a decrease of this packaging in sales (Årsrapport, 2013). One recent study is valid for Germany  
 2915 only and provides reuse rates for reusable glass bottles in third party operated pools and company owned  
 2916 pools (Deloitte, 2014).

---

<sup>68</sup> Agreement from packaging working group members (including beer and packed water pilot).

<sup>69</sup> Estimation: <http://ec.europa.eu/environment/waste/studies/packaging/belgium.pdf>

<sup>70</sup> Technical approximation as no data source could be found. Technical specifications guarantee a lifetime of 10 years. A return of 3 times per year (between 2 to 4) is taken as first approximation.

<sup>71</sup> Most conservative number is used.

2917 The following reuse rates shall be used by those PEFCRs that have third party operated reusable packaging  
2918 pools in scope, unless data of better quality is available:

- 2919 ● Glass bottles: 30 trips for beer and water<sup>72</sup>, 5 trips for wine<sup>73</sup>
- 2920 ● Plastic crates for bottles: 30 trips<sup>74</sup>
- 2921 ● Plastic pallets: 50 trips (Nederlands Instituut voor Bouwbiologie en Ecologie, 2014)<sup>75</sup>
- 2922 ● Wooden pallets: 25 trips (Nederlands Instituut voor Bouwbiologie en Ecologie, 2014)<sup>76</sup>

2923 If the TS decides to use other values within their final PEFCR, they shall clearly justify why and provide the  
2924 data source. In case a specific packaging type is not present in the list above, sector-specific data shall be  
2925 collected and included in the PEFCR. New values shall be subject to the PEFCR review.

## 2926 7.17 Use stage modelling

2927 The use stage is a life cycle stage that can result in a high overall environmental contribution for many  
2928 PEFCRs. As the use stage is calculated based on many modelling assumptions, the real contribution is  
2929 affected by potentially very high uncertainties.

2930 For the PEF screening study and supporting studies the use stage shall always be included for final products  
2931 by following the guidelines outlined below. The use stage shall be excluded for intermediate products.

### 2932 7.17.1 Definition of the use stage

2933 The use stage describes how the product is expected to be used by the end user (e.g., the consumer). The  
2934 use stage starts at the moment the end user uses the product, till (and excluded) it leaves its place of use  
2935 and enters the end-of-life life cycle stage (e.g., recycling or final treatment), including the necessary  
2936 transports.

---

<sup>72</sup>The reuse rates for third party operated glass bottle pools was largely discussed within the packaging working group. Literature provides values between 5 and 50 reuse rates, but is mainly outdated. The study of Deloitte (2014) is most recent but provides values within the German context only. It can be questioned if these results are directly applicable for the European context. However, the study provides results for both company owned pools (23 trips, considering all foreign bottles as exchanged) and third party operated pools (36 trips, considering all foreign bottles as exchanged). It shows that the reuse rates for third party operated pools are  $\pm 1.5$  times higher than for company owned pools. As first approximation the packaging working group proposes to use this ratio to extrapolate the average reuse rates for company owned pools (20 trips) towards average reuse rates for third party operated pools ( $20 * 1.5 = 30$  trips).

<sup>73</sup>Assumption based on monopoly system of Finland.  
<http://ec.europa.eu/environment/waste/studies/packaging/finland.pdf>

<sup>74</sup> Technical approximation as no data source could be found. Technical specifications guarantee a lifetime of 10 years. A return of 3 times per year (between 2 to 4) is taken as first approximation.

<sup>75</sup> The less conservative number is used.

<sup>76</sup> Half of plastic pallets is used as approximation.

2937 The use stage includes all activities and products that are needed for a proper use of the product (i.e. the  
 2938 provision of the original function is kept throughout its lifetime, see Figure 4). For example, the provision of  
 2939 tap water and wastewater treatments when cooking pasta; the manufacturing, distribution and waste  
 2940 management of paper filters for coffee; manufacturing, distribution and waste of materials needed for  
 2941 maintenance, repair or refurbishment (e.g. spare parts needed to repair the product, the coolant  
 2942 production and waste management due to losses). The following additional requirements shall be  
 2943 followed:

- 2944 (i) The waste of the product in use (e.g., food waste, primary packaging, or the product left at its  
 2945 end of use) is excluded and shall be part of the End-of-Life stage of the product.
- 2946 (ii) If a product is reused, the processes needed to collect the product and make it ready for the  
 2947 new use cycle are excluded (e.g. the impacts from collection and cleaning reusable bottles).
- 2948 (iii) Transport from retail to consumer home shall be excluded from the use stage and may be  
 2949 included in the distribution stage.



2950

2951 **Figure 4: Processes included and excluded from the use stage.**

2952 The use stage often involves multiple processes. A distinction shall be made between (i) product  
 2953 independent and (ii) product dependent processes.

2954 (i) **Product independent processes** have no relationship with the way the product is designed or  
 2955 distributed. The use stage process impacts will remain the same for all products in this product (sub)  
 2956 category even if the producer changes the product's characteristics. Therefore, they don't contribute to  
 2957 any form of differentiation between two products or might even hide the difference. Examples are the use  
 2958 of a glass for drinking wine (considering that the product doesn't determine a difference in glass use);  
 2959 frying time when using olive oil; energy use for boiling one litre of water to be used for preparing coffee  
 2960 made from bulk instant coffee; the washing machine used for heavy laundry detergents (capital good).

2961 (ii) **Product dependent processes** are directly or indirectly determined or influenced by the product design  
 2962 or are related to instructions for use of the product. These processes depend on the product characteristics  
 2963 and therefore contribute to differentiation between two products. All instructions provided by the  
 2964 producer and directed towards the consumer (through labels, websites or other media) shall be considered  
 2965 as product dependent. Examples of instruction are indications on how long the food must be cooked, how  
 2966 much water must be used, or in the case of drinks the recommended serving temperature and storage

2967 conditions. An example of a direct dependent process is the energy use of electric equipment when used in  
2968 normal conditions.

### 2969 **7.17.2 Main function approach or Delta approach**

2970 Modelling of the use stage may be done in different ways. Very often the related impacts and activities are  
2971 modelled fully. For example, the total electricity consumption when using a coffee machine, or the total  
2972 cooking time and related gas consumption when boiling pasta. In these cases, the use stage processes for  
2973 drinking coffee or eating pasta are related to the main function of the product (referred to as "main  
2974 function approach").

2975 In some cases, the use of one product can influence the environmental impact of another product. Some  
2976 examples:

- 2977 i. A toner cartridge is not held responsible for the paper it prints. But if remanufactured toner  
2978 cartridge works less efficient and causes more paper loss compared to an original cartridge, the  
2979 additional paper loss should be considered. In that case, the paper loss is a dependent process of  
2980 the use stage of a remanufactured cartridge. The use stage involves processes and activities which  
2981 are not 100% related to the product.
- 2982 ii. The energy consumption during the use stage of the battery/charger system is not related to the  
2983 amount of energy stored and released from the battery. It only refers to the energy loss in each  
2984 loading cycle. That energy loss can be caused by the loading system or the internal losses in the  
2985 battery.

2986 In these cases, only the additional activities and processes should be allocated to the product (e.g. paper  
2987 and energy of remanufactured toner cartridge and battery). The allocation method consists in taking all  
2988 associated products in the system (here paper and energy), and allocating the excess consumption of these  
2989 associated products to the product which is considered responsible for this excess. This requires a  
2990 reference consumption to be defined for each associated product in the PEFCR (e.g., of energy and  
2991 materials). The reference consumption refers to the minimum consumption that is essential for providing  
2992 the function. The consumption above this reference (the delta) will then be allocated to the product. This  
2993 approach is also named "Delta approach" by ADEME<sup>77</sup>.

2994 In case the Delta approach is used, the PEFCR shall state the minimum consumption (reference) to be used  
2995 when calculating the additional consumption allocated to the product. This approach should only be used  
2996 for increasing impacts and to account for additional consumptions above the reference. To define the  
2997 reference situation, the following shall be considered when existing:

- 2998 ● Regulations applicable to the product category
- 2999 ● Standards or harmonised standards
- 3000 ● Recommendations from manufacturers or manufacturers' organisations

---

<sup>77</sup> Specifications for drafting and revising product category rules (10.12.2014), ADEME.

- 3001 • Use agreements established by consensus in sector-specific working groups.
- 3002 It is up to the TS to decide which approach is taken and shall describe in the PEFCR which approach shall
- 3003 be applied (main function approach or Delta approach).
- 3004 **7.17.3 Modelling the use stage**
- 3005 For all processes belonging to the use stage (both most relevant and the others):
- 3006 i. The PEFCR shall indicate which use stage processes are *product dependent and product*
- 3007 *independent* (as described above).
- 3008 ii. The PEFCR shall identify for which processes default data shall be provided by following the
- 3009 modelling guidelines Table 27. In case modelling is optional the TS shall decide whether this is
- 3010 included in the system boundary of the PEFCR calculation model.
- 3011 iii. Per process to be modelled: the TS shall decide and describe in the PEFCR whether the main
- 3012 function approach or Delta approach shall be applied.
- 3013 a. Main function approach: The default datasets presented in the PEFCR shall reflect as much
- 3014 as possible the reality of market situations.
- 3015 b. In case of the Delta approach, the PEFCR shall provide the reference consumption to be
- 3016 used.
- 3017 iv. The PEFCR shall follow the modelling and reporting guidelines in Table 27.

3018 **Table 27: PEFCR guidelines for the use stage.**

Is the use stage process...		Actions to be taken by the TS	
Product dependent?	Most relevant?	Modelling guidelines	Where to report
Yes	Yes	To be included in the PEFCR system boundary. Provide default data	Mandatory: PEF report, reported separately*
	No	Optional: May be included in the PEFCR system boundary when the uncertainty can be quantified (provide default data)	Optional: PEF study, reported separately*
No	Yes/No	Excluded from the PEFCR system boundary	Optional: qualitative information

3019 \*Use stage results for final products shall be reported separately from other life cycle stages and not as  
 3020 additional environmental/technical information.

3021 Annex G provides default data to be used by the TS to model use stage activities that might be crosscutting  
 3022 for several pilots. The TS shall always apply the following guidelines in hierarchical order:

- 3023 1. First, the guidelines on data requirements and procedure to identify the most relevant  
 3024 contributions shall be followed (see section 7.4);  
 3025 2. Second, the guidelines indicated in Table 27 apply;  
 3026 3. Last, the default data provided in Annex F shall be used to fill in the data gaps and assure  
 3027 consistency among PEFCRs. Better data may be used but shall be justified in the PEFCR.

3028 **7.17.4 Example: pasta**

3029 Table 28 presents the processes used for modelling the use stage of 1kg dry pasta (boiling time according  
 3030 to instructions, for instance: 10 minutes; amount of water, according to the instructions, for instance 10  
 3031 litres). Among the 4 processes, electricity and heat use are the most relevant one. Within this example, all  
 3032 4 processes are product dependent. The amount of water use and cooking time is in general indicated on  
 3033 the packaging. The manufacturer can change the recipe in order to increase or reduce the cooking time,  
 3034 and therefore the energy use. Within the PEFCR default data is provided on all four processes, as indicated  
 3035 in Table 29 (activity data + LCI dataset to be used). Following the reporting guidelines, the EF as a total of all  
 3036 4 processes is reported as separate information.

3037 **Table 28: Processes of the use stage of dry pasta (taken from the screening study report, and to be used as**  
 3038 **example). The most relevant processes are indicated in the green box.**

Is the use stage process is ...?		Pasta processes	Actions taken by the TS:	
(ii) Product dependent?	(iii) Most relevant?		Modelling	Reporting
Yes	Yes	Electricity and Heat	Modelled as main function approach. Default data provided (total energy use).	In the PEF study, reported separately
	No	Tap water Waste water	Modelled as main function approach. Default data provided (total water use).	In the PEF study, reported separately
No	Yes/No		Excluded from the PEFCR calculation (impact categories)	Optional: qualitative information

3039 **Table 29: Example activity data and secondary datasets to be used.**

Materials/fuels	Value	Unit
Tap water, at user/RER U	10	kg
Electricity mix, AC, consumption mix, at consumer, <1kV EU-27 S	0.5	kWh

Materials/fuels	Value	Unit
Heat, from resid. Heating systems from NG, consumption mix, at consumer, temperature of 55C EU-27 S	2.3	kWh
Waste to treatment	Value	Unit
Waste water treatment, domestic waste water according to the Directive 91/271/EEC concerning urban waste water treatment plant EU-27 S	10	kg

### 3040 7.17.5 Example: energy using products

3041 The operating, servicing and maintenance conditions may be product dependant. In that case, they shall be  
3042 specified by the manufacturer and include the following:

- 3043 i. The maintenance operation frequency where applicable;
- 3044 ii. The parts, products and solvents used to maintain/service the reference product (e.g., batteries,  
3045 light sources and any substance covered by a Safety Data Sheet);
- 3046 iii. The consumables required for operation: ink, etc.

3047 For those processes that are not relevant, their inclusion in the PEFCR calculation model is to be decided by  
3048 the TS.

### 3049 7.18 End-of-Life modelling

3050 The waste of products used during the manufacturing, distribution, retail, the use stage or after use shall  
3051 be included in the overall modelling of the life cycle of the product. Overall, this should be modelled and  
3052 reported at the life cycle stage where the waste occurs. For example, the EoL of the wastes generated  
3053 during manufacturing should be modelled and reported at the manufacturing life cycle stage. The end-of-  
3054 life of the main product in scope is mostly to be modelled in the End-of-Life stage of the life cycle. For  
3055 waste at use stage the specific rules to be followed are in section 7.17.3. The End-of-Life stage is a life cycle  
3056 stage that in general includes the waste of the product in scope, such as the food waste, the product left at  
3057 its end of use and the primary packaging of the product. For intermediate products, the End-of-Life of the  
3058 product in scope shall be excluded. Default loss rates per type of product during distribution and at  
3059 consumer are provided in - Default loss rates per type of product and shall be used in case no PEFCR-  
3060 specific information is available.

3061 The current PEF Guide (Recommendation 2013/179/EU) require the use of a formula to model product  
3062 waste, commonly known as End-of-Life (EoL) formula, available in the Annex V of the PEF Guide, to deal  
3063 with multi-functionality in recycling, re-use and energy recovery situations.

3064 The initial feedbacks received by some pilots participating to the EF pilot phase and the further experience  
3065 gathered during three years of pilot phase, led the Commission to re-consider the EoL formula available in  
3066 the Annex V and, together with interested stakeholders, to come up with an alternative proposal.

3067 The new formula has been renamed to “Circular Footprint Formula” (CFF) and shall be used in the EF-  
 3068 context instead of the original "End-of-Life" formula. The following sections describe the formula and  
 3069 parameters to be used, while the last sections describe how the formula and parameters shall be applied to  
 3070 final products (see section 7.18.11), to intermediate products (see section 7.18.12) and to construction  
 3071 products (see section 7.18.13).

3072 **7.18.1 The Circular Footprint Formula**

3073 The CFF is a combination of "material + energy + disposal", i.e.:

3074 **Material**  $(1 - R_1)E_V + R_1 \times \left( AE_{recycled} + (1 - A)E_V \times \frac{Q_{Sin}}{Q_P} \right) + (1 - A)R_2 \times \left( E_{recyclingEoL} - E_V^* \times \frac{Q_{Sout}}{Q_P} \right)$

3075 **Energy**  $(1 - B)R_3 \times (E_{ER} - LHV \times X_{ER,heat} \times E_{SE,heat} - LHV \times X_{ER,elec} \times E_{SE,elec})$

3076 **Disposal**  $(1 - R_2 - R_3) \times E_D$

3077 **Equation 18 – The Circular Footprint Formula (CFF)**

3078

3079 **The modular form of the Circular Footprint Formula**

3080 The CFF can be arranged in a modular way, to fit for example the structure of the EN 15804 standard.

3081 Equation 19 is the CFF re-arranged in different modules. The acronym for this formula is **CFF-M**.

3082

<b>Production burdens</b>	$(1 - R_1)E_V + R_1 \times E_{recycled}$	<b>Cradle-to-gate</b>
<b>Burdens and benefits related to secondary materials input</b>	$-(1 - A)R_1 \times \left( E_{recycled} - E_V \times \frac{Q_{Sin}}{Q_P} \right)$	
<b>Burdens and benefits related to secondary materials output</b>	$(1 - A)R_2 \times \left( E_{recyclingEoL} - E_V^* \times \frac{Q_{Sout}}{Q_P} \right)$	
<b>Energy recovery</b>	$(1 - B)R_3 \times \left( E_{ER} - LHV \times X_{ER,heat} \times E_{SE,heat} - LHV \times X_{ER,elec} \times E_{SE,elec} \right)$	
<b>Disposal</b>	$(1 - R_2 - R_3) \times E_D$	

Additional information from the EoL stage

3083 **Equation 19 – Modular form of the Circular Footprint Formula (CFF-M)<sup>[2]</sup>**



- 3084
- 3085 **7.18.2 The parameters of the Circular Footprint Formula (CFF and CFF-M)**
- 3086 **A:** allocation factor of burdens and credits between supplier and user of recycled materials.
- 3087 **B:** allocation factor of energy recovery processes: it applies both to burdens and credits.
- 3088 **Q<sub>s</sub><sub>in</sub>:** quality of the ingoing secondary material, i.e. the quality of the recycled material at the point of  
3089 substitution.
- 3090 **Q<sub>s</sub><sub>out</sub>:** quality of the outgoing secondary material, i.e. the quality of the recyclable material at the point of  
3091 substitution.
- 3092 **Q<sub>p</sub>:** quality of the primary material, i.e. quality of the virgin material.
- 3093 **R<sub>1</sub>:** it is the proportion of material in the input to the production that has been recycled from a previous  
3094 system.
- 3095 **R<sub>2</sub>:** it is the proportion of the material in the product that will be recycled (or reused) in a subsequent  
3096 system. R2 shall therefore take into account the inefficiencies in the collection and recycling (or reuse)  
3097 processes. R2 shall be measured at the output of the recycling plant.
- 3098 **R<sub>3</sub>:** it is the proportion of the material in the product that is used for energy recovery at EoL.
- 3099 **E<sub>recycled</sub> (E<sub>rec</sub>):** specific emissions and resources consumed (per functional unit) arising from the recycling  
3100 process of the recycled (reused) material, including collection, sorting and transportation process.
- 3101 **E<sub>recyclingEoL</sub> (E<sub>recEoL</sub>):** specific emissions and resources consumed (per functional unit) arising from the  
3102 recycling process at EoL, including collection, sorting and transportation process.
- 3103 **E<sub>v</sub>:** specific emissions and resources consumed (per functional unit) arising from the acquisition and pre-  
3104 processing of virgin material.
- 3105 **E\*<sub>v</sub>:** specific emissions and resources consumed (per functional unit) arising from the acquisition and pre-  
3106 processing of virgin material assumed to be substituted by recyclable materials.
- 3107 **E<sub>ER</sub>:** specific emissions and resources consumed (per functional unit) arising from the energy recovery  
3108 process (e.g. incineration with energy recovery, landfill with energy recovery, ...).
- 3109 **E<sub>SE,heat</sub> and E<sub>SE,elec</sub>:** specific emissions and resources consumed (per functional unit) that would have arisen  
3110 from the specific substituted energy source, heat and electricity respectively.
- 3111 **ED:** specific emissions and resources consumed (per functional unit) arising from disposal of waste material  
3112 at the EoL of the analysed product, without energy recovery.
- 3113 **X<sub>ER,heat</sub> and X<sub>ER,elec</sub>:** the efficiency of the energy recovery process for both heat and electricity.
- 3114 **LHV:** Lower Heating Value of the material in the product that is used for energy recovery.

3115 **7.18.3 The A factor**

3116 The A factor allocates burdens and credits between two life cycles and it aims to reflect market realities.

3117 In PEF studies the A factor values shall be in the range  $0.2 \leq A \leq 0.8$ , to always capture both aspects of  
3118 recycling (recycled content and recyclability at end-of-life).

3119 The driver to determine the values of the A factor is the analysis of the market situation. This means:

- 3120 ● **A=0.2.** Low offer of recyclable materials and high demand: the formula focus on recyclability at  
3121 End-of-Life.
- 3122 ● **A=0.8.** High offer of recyclable materials and low demand: the formula focus on recycled content.
- 3123 ● **A=0.5.** Equilibrium between offer and demand: the formula focuses both on recyclability at EoL  
3124 and recycled content. This value applies to all materials for which no A value is available in Annex  
3125 C.

3126 The list of A values is available in Annex C. This table is cross-cutting and shall be used by all PEFCRs.  
3127 Proposals to include new or updated values of A will be evaluated by the EC. The list of A values in the  
3128 Annex C will be periodically reviewed and updated by the Commission.

3129 The list of A values to be used shall be clearly listed in the PEFCR, with a reference to Annex C. The  
3130 following procedure shall be applied by the TS to select the value of A to be included in the PEFCR:

- 3131 ● Check in Annex C the availability of an application specific A value which fits the PEFCR,
- 3132 ● If an application specific A value is not available, the material specific A value in Annex C shall be  
3133 used,
- 3134 ● If a material specific A value is not available, the A value shall be set equal to 0.5.

3135  
3136 The same procedure shall be applied by the applicant in case a specific A value is missing in the PEFCR.

3137 **7.18.4 The B factor**

3138 The B factor is used as an allocation factor of energy recovery processes. It applies both to burdens and  
3139 credits. Credits refer to the amount of heat and electricity sold, not to the total produced, taking into  
3140 account relevant variations over a 12-months period, e.g. for heat.

3141 **In PEF studies and benchmark calculations the B value shall be equal to 0 as default.**

3142 To avoid double-counting between the current and the subsequent system in case of energy recovery, the  
3143 subsequent system shall model its own energy use as primary energy.


3144 Proposals to include new or updated values of B in Annex C will be evaluated by the Commission. The list of  
3145 B values will be periodically reviewed and updated by the Commission.

3146 **7.18.5 The point of substitution**

3147 It is necessary to determine the point of substitution to apply the “material” part of the formula. The point  
 3148 of substitution corresponds to the point in the value chain where secondary materials substitute primary  
 3149 materials.

3150 The point of substitution shall be identified in correspondence to the process where input flows are coming  
 3151 from 100% primary sources and 100% secondary sources (level 1 in Figure 5). In some cases the point of  
 3152 substitution may be identified after some mixing of primary and secondary material flows has occurred  
 3153 (level 2 in Figure 5). The identification of the point of substitution shall be made depending on the  
 3154 Situations and Options of the DNM.


- 3155 ● **Point of substitution at level 1:** it shall be applied in Situation 1/ Option 1, and in Situation  
 3156 2/Option 1 of the DNM (See Table 30). This point of substitution corresponds to e.g. metal  
 3157 scrap/glass and cullet/pulp input to the process.
- 3158 ● **Point of substitution at level 2:** it shall be applied in Situation 1./Option2, Situation 2/Option 2,  
 3159 Situation 2/Option 3 and Situation 3 of the DNM (See Table 30). This point of substitution  
 3160 corresponds to e.g. metal ingots, glass, paper.
- 3161 ● The point of substitution at this level may be applied only if the datasets used to model e.g.  $E_{rec}$  and  
 3162  $E_v$  take into account the real (average) flows regarding primary and secondary materials: for  
 3163 example, if  $E_{rec}$  corresponds to the “production of 1 t of secondary material” (see Figure 5) and it  
 3164 has an average input of 10% from primary raw materials, the amount of primary materials,  
 3165 together with their environmental burdens, shall be included in the  $E_{rec}$  dataset.

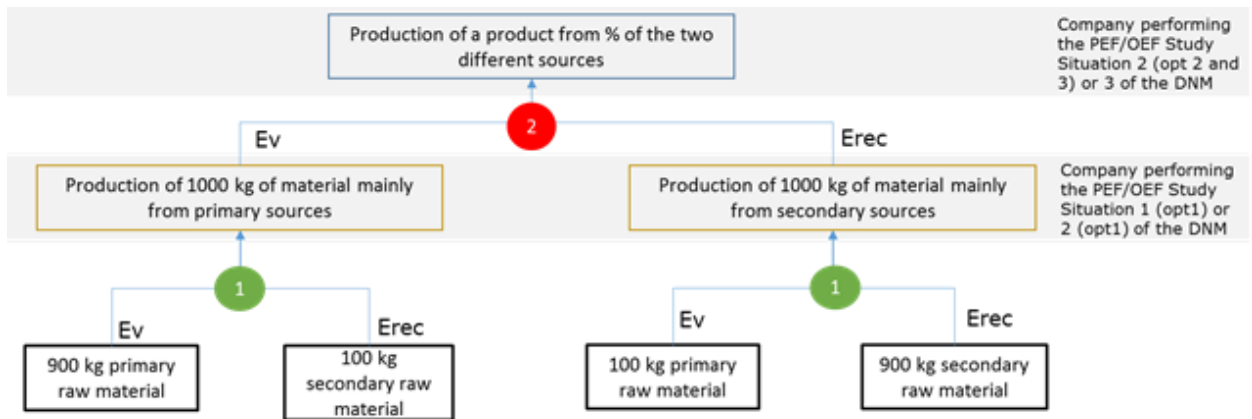

3166

3167 **Figure 5: Point of substitution at level 1 and at level 2.**

3168 Figure 5 is a schematic representation of a generic situation (flows are 100% primary and 100% secondary).  
 3169 In practice in some situations, more than one point of substitution can be identified at different steps in  
 3170 the value chain, as represented in Figure 6, where e.g. scrap of two different qualities is processed at  
 3171 different steps.

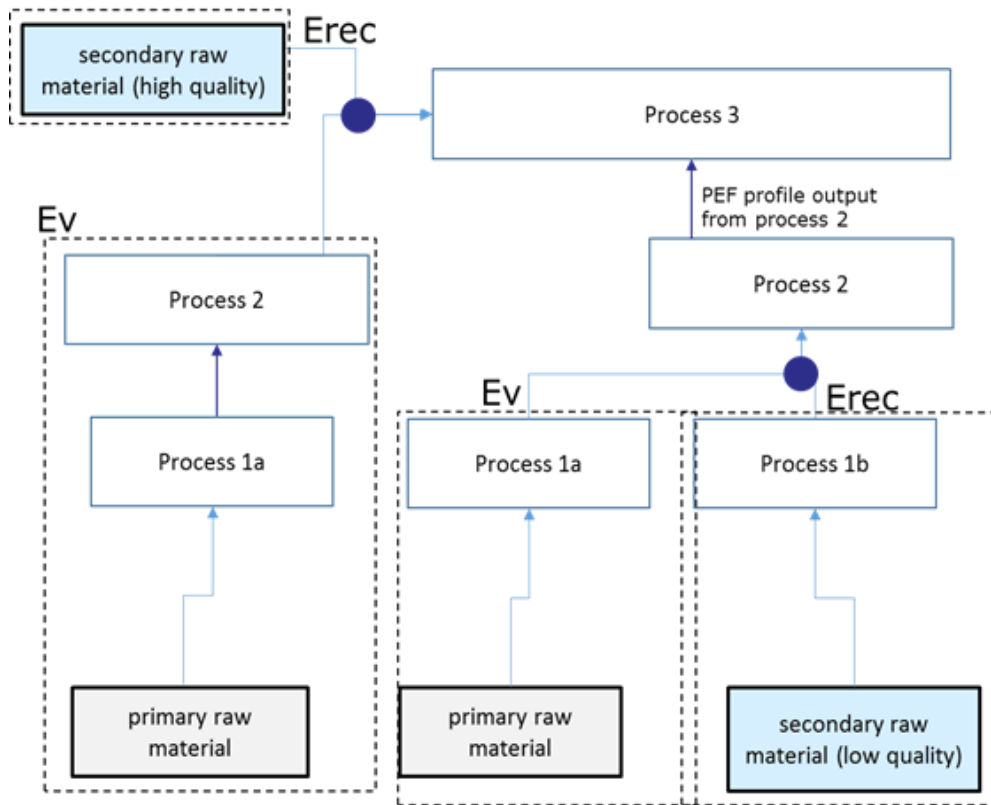

3172

3173 **Figure 6: Example of point of substitutions at different steps in the value chain.**

3174 **7.18.6 The quality ratios:  $Q_{S_{in}}/Q_p$  and  $Q_{S_{out}}/Q_p$**

3175 Two quality ratios are used in the CFF, to take into account the quality of both the ingoing and the outgoing  
 3176 recycled materials.

3177 Two further cases can be distinguished:

3178 **a) If  $Ev=E*v$**  the two quality ratios are needed:  $Q_{S_{in}}/Q_p$  associated to the recycled content, and  $Q_{S_{out}}/Q_p$   
 3179 associated to recyclability at EoL; the quality factors are there to capture downcycling of a material  
 3180 compared to the original primary material and, in some cases, may capture the effect of multiple recycling  
 3181 loops.

3182 **b) If  $Ev \neq E*v$**  one quality ratio is needed:  $Q_{S_{in}}/Q_p$  associated to the recycled content. In this case  $E*v$  refers  
 3183 to the functional unit of the material substituted in a specific application. For example, plastic recycled to  
 3184 produce a bench modelled via substitution of cement, shall take into account also how much, how long,  
 3185 how well. Therefore, the  $E*v$  parameter indirectly integrates the  $Q_{S_{out}}/Q_p$  parameter, and therefore the  
 3186  $Q_{S_{out}}$  and  $Q_p$  parameters are not part of the CFF.

3187 The quality ratios shall be determined at the point of substitution and per application or material. The  
 3188 quality ratios are PEFCR specific, except for packaging materials (see section 7.18.24).

3189 The quantification of the quality ratios shall be based on:

- 3190 • Economical aspects: i.e. price ratio of secondary compared to primary materials at the point of  
3191 substitution. In case the price of secondary materials is higher than the primary ones, the quality  
3192 ratios shall be set equal to 1.
- 3193 • When economic aspects are less relevant than physical aspects, the latter may be used.

3194 **7.18.7 Recycled content (R<sub>1</sub>)**

3195 The R<sub>1</sub> values applied shall be supply-chain or application specific, in relation with the DNM. The R<sub>1</sub> value  
3196 shall be set to 0% when no application-specific data is available. Material-specific values based on supply  
3197 market statistics are not accepted as a proxy.

3198 The applied R<sub>1</sub> values shall be subject to the PEFCR review (if applicable) or PEF study verification (if  
3199 applicable).

3200 **7.18.7.1 Relation with the Data Needs Matrix (DNM)**

3201 The choice for ' default R<sub>1</sub> values' or 'company-specific R<sub>1</sub> values' shall be based on the rules of the DNM  
3202 (see Table 30).

3203 This means that company-specific values shall be used when:

- 3204 • the process is identified in the PEFCR as being most relevant and is run by the company applying  
3205 the PEFCR,  
3206 or:
- 3207 • the process is listed by the PEFCR as obligatory to be covered by company-specific data.

3208  
3209 In all other cases 'default secondary R<sub>1</sub> values' may be used: for example, when R<sub>1</sub> is in situation 2, option 2  
3210 of the DNM. In this case company-specific data is not mandatory and default secondary data should be  
3211 used by the company applying the PEFCR.

3212 **Table 30: Requirements regarding R<sub>1</sub> values in relation with the DNM.**

		Most relevant process	Other process
<b>Situation 1:</b> process run by the company applying the PEFCR	<b>Option 1</b>	Supply-chain specific R1 value	
	<b>Option 2</b>		Default (application-specific) R1 value
<b>Situation 2:</b> process <u>not</u> run by the company applying the PEFCR but with access to company-specific information	<b>Option 1</b>	Supply-chain specific R1 value	
	<b>Option 2</b>	Default (application-specific) R1 value	
	<b>Option 3</b>		Default (application-specific) R1 value

<b>Situation 3:</b> process <u>not</u> run by the company applying the PEFCR and <u>without</u> access to company-specific information	<b>Option 1</b>	Default (application-specific) R1 value	
	<b>Option 2</b>		Default (application-specific) R1 value

3213

3214 **7.18.7.2 Guidelines when using supply-chain specific R<sub>1</sub> values**

3215 When using supply-chain specific R<sub>1</sub> values other than 0, traceability throughout the supply chain is  
 3216 necessary. The following general guidelines shall be followed when using supply-chain specific R<sub>1</sub> values:

- 3217 ● The supplier information (through e.g., statement of conformity or delivery note) shall be  
 3218 maintained during all stages of production and delivery at the converter;
- 3219 ● Once the material is delivered to the converter for production of the end products, the converter  
 3220 shall handle information through their regular administrative procedures;
- 3221 ● The converter for production of the end products claiming recycled content shall demonstrate  
 3222 through his management system the [%] of recycled input material into the respective end  
 3223 product(s).
- 3224 ● The latter demonstration shall be transferred upon request to the user of the end product. In case  
 3225 a PEF profile is calculated and reported, this shall be stated as additional technical information of  
 3226 the PEF profile.
- 3227 ● Industry- or company-owned traceability systems may be applied as long as they cover the general  
 3228 guidelines outlined above. If not, they shall be supplemented with the general guidelines above.

3229 **7.18.7.3 Guidelines when using default R1 values**

3230 Default R<sub>1</sub> values are available in Annex C and are application specific. Default R<sub>1</sub> values shall be used if  
 3231 there is an application specific value available in Annex C. If no application-specific value is available in  
 3232 Annex C, the R<sub>1</sub> value shall be set equal to 0.


3233 The PEFCR shall (i) prescribe the list of R<sub>1</sub> values which shall be used by the applicant in case no company-  
 3234 specific values are available and (ii) shall make a reference to Annex C.

3235 **7.18.7.4 Guidelines on how to deal with pre-consumer scrap**

3236 When dealing with pre-consumer scrap, two options may be applied. Each TS shall identify and include in  
 3237 the PEFCR which option shall be used when modelling pre-consumer scrap.

- 3238 ● **Option 1:** the impacts to produce the input material that lead to the pre-consumer scrap in  
 3239 question have to be allocated to the product system that generated this scrap. Scrap is claimed as  
 3240 pre-consumer recycled content.
- 3241 ● Process boundaries and modelling requirements applying the Circular Footprint Formula are shown  
 3242 in Figure 7.


3243

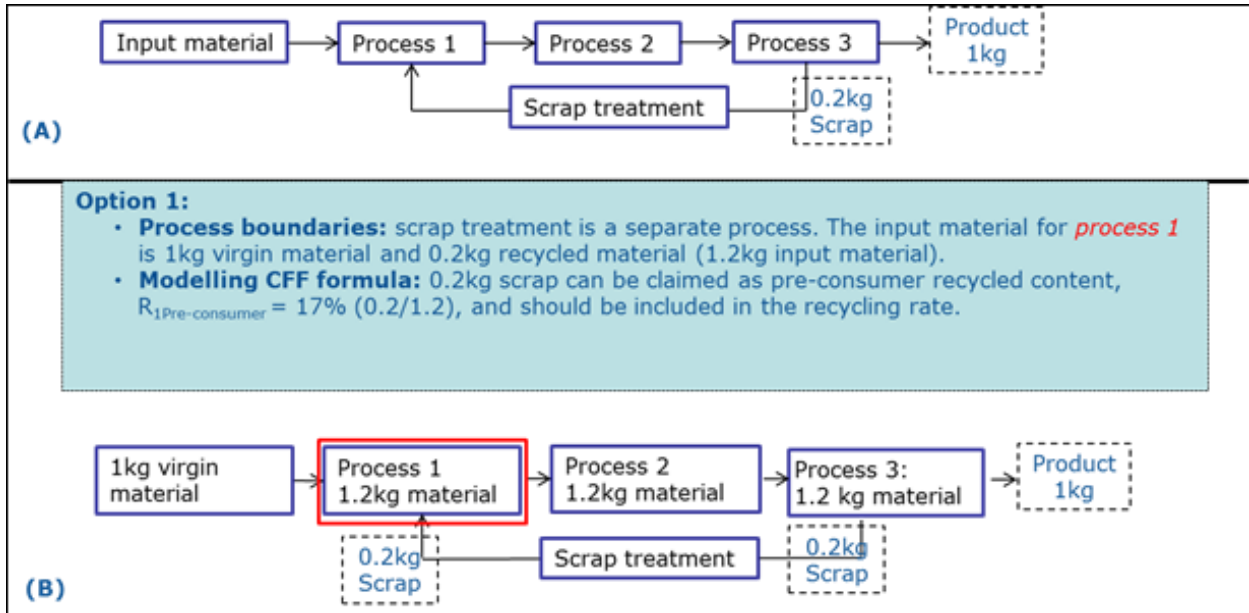

3244

3245 **Figure 7: Modelling option when pre-consumer scrap is claimed as pre-consumer recycled content.**

- 3246 • **Option 2:** Any material that circulates within a process chain or pool of process chains is excluded from being defined as recycled content and it is not included in  $R_1$ . Scrap is not claimed as pre-consumer recycled content.
- 3247
- 3248
- 3249 • Process boundaries and modelling requirements applying the Circular Footprint Formula are shown in Figure 8.
- 3250
- 3251

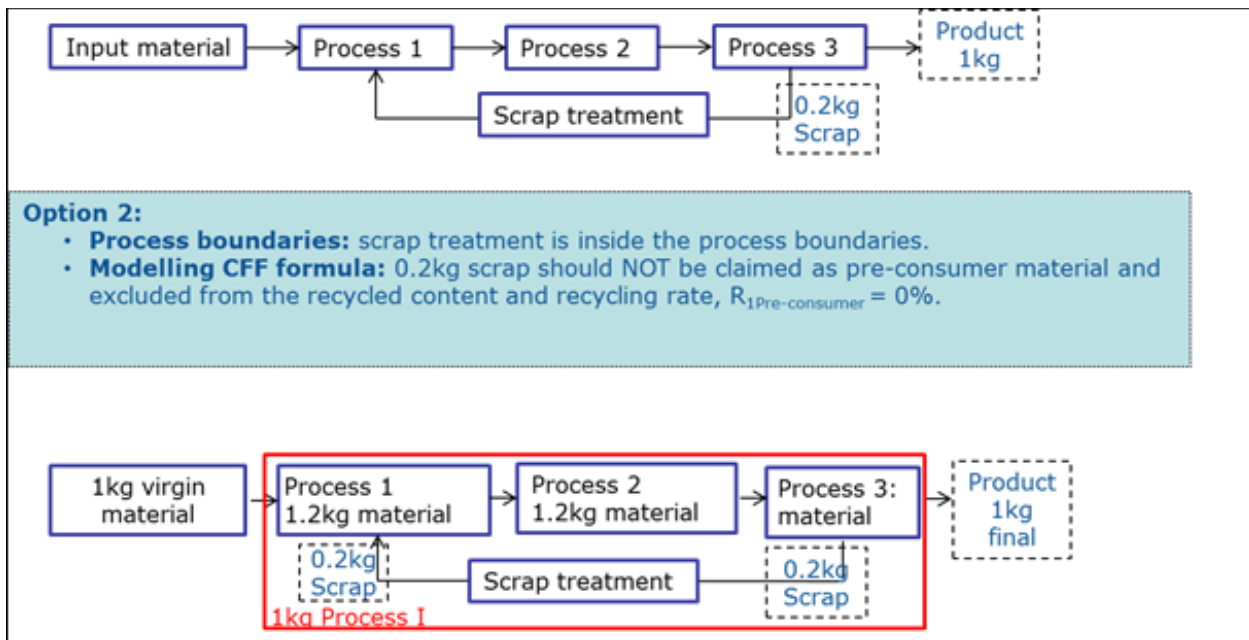

3252

3253 **Figure 8: Modelling option when pre-consumer scrap is not claimed as pre-consumer recycled content.**

3254 **7.18.8 Recycling output rate (R2)**


3255 Default R<sub>2</sub> values are available in – List of default values for A, R1, R2, R3 and Qs/Qp. The PEFCR shall list  
3256 the default R<sub>2</sub> values (with reference to – List of default values for A, R1, R2, R3 and Qs/Qp) to be used by  
3257 the applicant in case no company-specific values are available. If an R<sub>2</sub> value is not available for a specific  
3258 application in – List of default values for A, R1, R2, R3 and Qs/Qp, the PEFCR shall list the R<sub>2</sub> values of the  
3259 material (e.g. materials average). In case no R<sub>2</sub> values are available in – List of default values for A, R1, R2,  
3260 R3 and Qs/Qp, R<sub>2</sub> shall be set equal to 0 or new statistics may be generated by the TS in order to assign an  
3261 R<sub>2</sub> value. Proposals to include new or updated values of R<sub>2</sub> in – List of default values for A, R1, R2, R3 and  
3262 Qs/Qp will be evaluated by the Commission. The list of R<sub>2</sub> values in the – List of default values for A, R1, R2,  
3263 R3 and Qs/Qp will be periodically reviewed and updated by the Commission.

3264 The following procedure shall be followed by the applicant to select the right R<sub>2</sub> value:

- 3265 ● Company-specific values shall be used when available.
- 3266 ● If no company-specific values are available and the criteria for evaluation of recyclability are  
3267 fulfilled (see below), application-specific R<sub>2</sub> values shall be used as listed in the PEFCR,
  - 3268 ○ If an R<sub>2</sub> value is not available for a specific country, then the European average shall be  
3269 used.
  - 3270 ○ If an R<sub>2</sub> value is not available for a specific application, the R<sub>2</sub> values of the material  
3271 shall be used (e.g. materials average).
  - 3272 ○ In case no R<sub>2</sub> values are available, R<sub>2</sub> shall be set equal to 0 or new statistics may be  
3273 generated in order to assign an R<sub>2</sub> value in the specific situation.
- 3274 ● The applied R<sub>2</sub> values shall be subject to the PEF study verification.

3275 A visual representation of the output recycling rate is given in Figure 9. Often, values are available for point  
3276 8 in Figure 9, therefore such values shall be corrected to the actual output recycling rate (point 10). In  
3277 Figure 9 the output recycling rate (R2) is in correspondence of point 10.



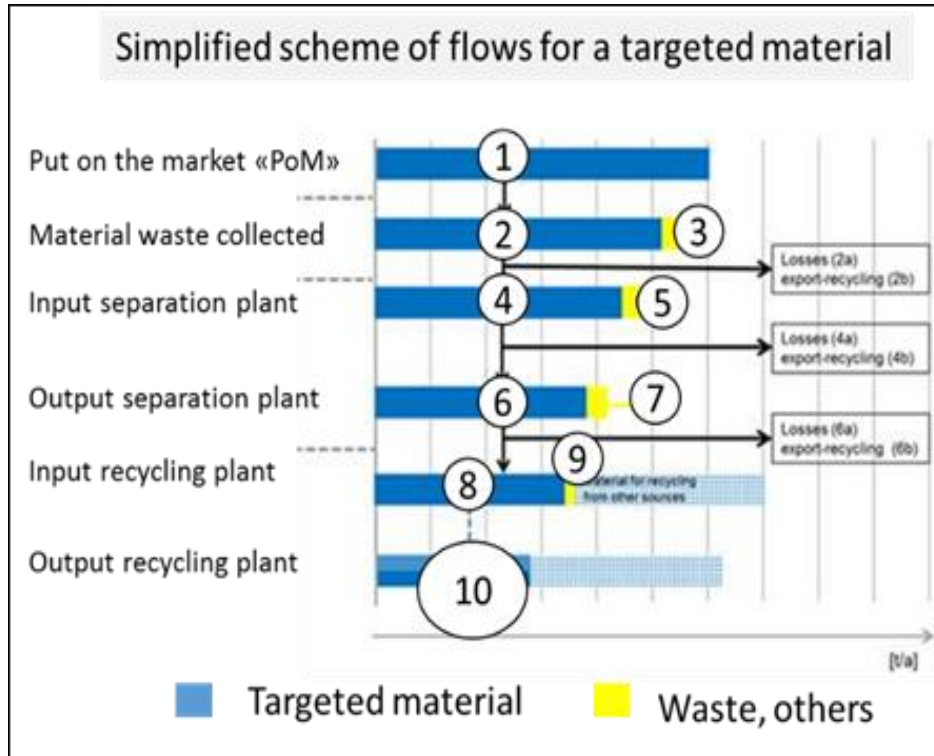

3278

3279 **Figure 9: Simplified collection recycling scheme of a material.**

3280 The product design and composition will determine if the material in the specific product is actually  
 3281 suitable for recycling and thus falls within the values available in – List of default values for A, R1, R2, R3  
 3282 and Qs/Qp. Therefore, before selecting the appropriate R<sub>2</sub> value, an evaluation for recyclability of the  
 3283 material shall be done and the PEF study shall include a statement on the recyclability of the  
 3284 materials/products:

3285 The statement on the recyclability shall be provided together with an evaluation for recyclability that  
 3286 includes evidence for the following three criteria (as described by *ISO 14021:1999, section 7.7.4 'Evaluation*  
 3287 *methodology'*):

- 3288 1. The collection, sorting and delivery systems to transfer the materials from the source to the  
 3289 recycling facility are conveniently available to a reasonable proportion of the purchasers, potential  
 3290 purchasers and users of the product;
- 3291 2. The recycling facilities are available to accommodate the collected materials;
- 3292 3. Evidence is available that the product for which recyclability is claimed is being collected and  
 3293 recycled.

3294 Point 1 and 3 can be proven by recycling statistics (country specific) derived from industry associations or  
 3295 national bodies. Approximation to evidence at point 3 can be provided by applying for example the design

3296 for recyclability evaluation outlined in EN 13430 Material recycling (Annexes A and B) or other sector-  
3297 specific recyclability guidelines if available<sup>78</sup>.

3298 Following the evaluation for recyclability, the appropriate  $R_2$  values (supply-chain specific or provided in the  
3299 – List of default values for A, R1, R2, R3 and Qs/Qp) shall be used.

3300 If one criterion is not fulfilled or the sector-specific recyclability guidelines indicate a limited recyclability:  
3301 an  $R_2$  value of 0% shall be applied.

### 3302 **7.18.9 $E_{recycled}$ and $E_{recyclingEoL}$**

3303 The system boundary of  $E_{rec}$  and  $E_{recEoL}$  shall consider all the emissions and resources consumed starting  
3304 from collection up to the defined point of substitution.

3305 If the point of substitution is identified at “level 2”  $E_{rec}$  and  $E_{recEoL}$  shall be modelled using the real input  
3306 flows. Therefore, if a portion of the input flows are from primary raw materials, they shall be included in  
3307 the datasets used to model  $E_{rec}$  and  $E_{recEoL}$ .

3308 In some cases  $E_{rec}$  can correspond to  $E_{recEoL}$ , for example in cases where close loops occurs.

3309 The PEFCR shall list the default datasets that shall be used by the applicant to model  $E_{rec}$  and  $E_{recEoL}$ .

### 3310 **7.18.10 The $E^*v$**

3311 When default  $E^*v$  equals  $E_v$ , it is assumed that a recyclable material at end-of-life is replacing the same  
3312 virgin material than where the recyclable material is produced from (at input side).

3313 In some cases  $E^*v$  will be different from  $E_v$ , when evidence is provided that a recyclable material is  
3314 substituting a different virgin material than where the recyclable material is produced from,.

3315 When  $E^*v \neq E_v$ ,  $E^*v$  represents the actual amount of virgin material substituted by the recyclable material.  
3316 In such cases  $E^*v$  is not multiplied by  $Q_{sout}/Q_p$ , because this parameter is indirectly taken into account  
3317 when calculating the “actual amount” of virgin material substituted: such amount shall be calculated taking  
3318 into account that the virgin material substituted and the recyclable material fulfil the same function, in  
3319 terms of “how long” and “how well”.  $E^*v$  shall be determined based on evidence of actual substitution of  
3320 the selected virgin material.

3321 The PEFCR shall list the default datasets that shall be used by the applicant to model of  $E^*v$  and  $E_v$ .

### 3322 **7.18.11 How to apply the formula to final products (cradle-to-grave studies)**

3323 When the formula is applied to final products, the PEFCR shall prescribe:

- 3324 ● The use of Equation 18 (CFF)

---

<sup>78</sup> E.g. the EPBP design guidelines (<http://www.epbp.org/design-guidelines>), or Recyclability by design (<http://www.recoup.org/>)

- 3325
- Default A values of the specific application or material.

3326 **7.18.12 How to apply the formula to intermediate products (cradle-to-gate studies)**

3327 In cradle-to-gate PEF studies the parameters related to the end-of-life of the product (i.e. recyclability at  
3328 end-of-life, energy recovery, disposal) shall not be accounted for, unless the PEFCR requires to calculate  
3329 additional information from the EoL stage.

3330 When the formula is applied in PEF studies with intermediate products (cradle-to-gate studies), the PEFCR  
3331 shall prescribe:

- 3332
- The use of Equation 18 (CFF)
  - To exclude the end-of-life by setting the parameters  $R_2$ ,  $R_3$ , and  $E_d$  equal to 0.
  - The default A values of possible specific applications for the product in scope.
  - To use and report the results with two A values for the product in scope:
    - Setting  $A = 1$ : to be used as default in the PEF profile calculation.
    - Setting  $A =$  the application- or material-specific default values as listed in the PEFCR: These results shall be reported as 'additional technical information' and to be used when creating EF compliant datasets.
- 3333  
3334  
3335  
3336  
3337  
3338  
3339

3340

3341 When developing the PEFCR, the A value of the product in scope shall be set to 1 for the hotspot analysis.  
3342 This to allow the focus of the hotspot on the actual system. This shall be documented in the PEFCR.

3343 When developing the EF compliant datasets, A shall be set to the application- or material-specific default  
3344 value. This to allow the use of the correct A value when the dataset is used in future modelling. This shall  
3345 be documented in the PEFCR.

3346

3347 **7.18.13 How to apply the formula to construction products**

3348 When the formula is applied to the full life cycle of a construction product, the PEFCR shall prescribe:

- 3349
- The use of Equation 18 (CFF) or Equation 19 (CFF-M),
  - Default A values of the specific application or material.
- 3350

3351 When the formula is applied to intermediate construction products, the PEF profile shall be calculated as  
3352 follows:

- 3353
- The “production burdens” part of Equation 19 (CFF-M) shall be used.
  - The PEF report shall include the profile of the “Burdens and benefits related to secondary materials input” part of Equation 19 (CFF-M), using the default A value of the specific application or material.
- 3354  
3355

3356 **7.18.14 Summary table on how to apply the Circular Footprint Formula**

3357 Table 31 provides a summary on how to apply the CFF, depending on a study focusing on final products,  
3358 intermediate products or construction products.

3359 **Table 31: Summary table on how to apply the CFF in different situations.**

Formula		Products apart from construction products		Construction products	
		<i>Final products</i>	<i>Intermediates</i>	<i>Full life cycle</i>	<i>Intermediates</i>
<b>1) CFF</b>					
	A = 1		X (hotspot and PEF profile)		
	A = default	X	X (Additional technical info. And EF compliant dataset)		
<b>2) CFF-M</b>					
	A= default (All modules)			X	
	Production burdens				X
	Burdens and benefits related to secondary materials input, A=default				X

3360 **7.18.15 How to deal with specific aspects**

3361 **7.18.16 Biogenic carbon**

3362 When modelling bio-based products, biogenic carbon shall be modelled according to the requirements  
 3363 listed in section 7.9.2.

3364 **7.18.17 Recovery bottom ashes/slag from incineration**

3365 Recovery of bottom ashes/slag shall be included in the R<sub>2</sub> value (recycling output rate) of the original  
 3366 product/material. Their treatment is within the ErecEoL.

3367 **7.18.18 Landfill and incineration with energy recovery**

3368 Whenever a process, such as landfill with energy recovery or municipal solid waste incineration with  
 3369 energy recovery, is leading to an energy recovery it shall be modelled under the “energy” part in Equation  
 3370 18 (CFF). The credit is calculated based on the amount of output energy that is sold.

3371 **7.18.19** **Municipal solid waste**

3372 Default values per country are provided in – List of default values for A, R1, R2, R3 and Qs/Qp and shall be  
3373 used to quantify the share to landfill and the share to incineration, unless supply-chain specific values are  
3374 available.

3375 **7.18.20** **Compost and anaerobic digestion/sewage treatment**

3376 Compost, including digestate coming out of the anaerobic digestion, shall be treated in the “material” part  
3377 (Equation 18) like a recycling with  $A = 0.5$ . The energy part of the anaerobic digestion shall be treated as a  
3378 normal process of energy recovery under the “energy” part of Equation 18 (CFF).

3379 **7.18.21** **Waste materials used as a fuel**

3380 When a waste material is used as a fuel (e.g. waste plastic used as fuel in cement kilns), it shall be treated  
3381 as an energy recovery process under the “energy” part of Equation 18 (CFF).

3382 **7.18.22** **Modelling complex products**

3383 When considering complex products (e.g. printed wiring boards PWB) with complex end-of-life  
3384 management, the default datasets for end-of-life treatment processes should already implement the  
3385 Circular Footprint Formula. The default values of the parameters shall refer to the ones in – List of default  
3386 values for A, R1, R2, R3 and Qs/Qp and shall be available as metadata information in the dataset. The Bill of  
3387 Material (BoM) should be taken as a starting point for calculations if no default data is available.

3388 **7.18.23** **Reuse and refurbishment**

3389 If the reuse/refurbishment of a product results into a product with different product specifications  
3390 (providing another function), this shall be considered as part of the CFF, as a form of recycling (see section  
3391 7.8). Also, old parts that have been changed during refurbishment shall be modelled under the CFF.

3392 In this case, reuse/refurbishment activities are part of the  $E_{recEoL}$  parameter, while the alternative function  
3393 provided (or the avoided production of parts or components) fall under the  $E^*v$  parameter.

3394 **7.18.24** **Packaging**

3395 **Qs/Qp values for packaging**

3396 Quality ratios are always PEFCR specific, except for packaging. The packaging materials used by industry are  
3397 often the same within different sectors and product groups. Therefore, consistency is also needed in the  
3398 quality ratios used within the CFF. “– List of default values for A, R<sub>1</sub>, R2, R3 and Qs/Qp” provides one  
3399 worksheet with Qs/Qp values applicable only to packaging materials. The values are derived from the  
3400 document “PEF-OEF\_EOL DefaultData\_V1.2\_uploaded”, used within the pilot phase. These values are  
3401 based on user experiences and have no literature references.

3402 Each PEFCR should use the default values provide here. The TS may decide to change the default values if  
3403 this is justified in the PEFCR.

3404

### 3405 **Recycled content (R<sub>1</sub>) for packaging**

3406 When using supply-chain-specific R<sub>1</sub> values, traceability throughout the supply chain is necessary and  
3407 supplementary information is required. For the packaging industry, the following industry-specific  
3408 guidelines are recommended:

- 3409 ● For the container glass industry (FEVE - The European Container Glass Federation): the European  
3410 Commission regulation no 1179/2012. This regulation requests a statement of conformity  
3411 delivered by the cullet producer.
- 3412 ● For the paper industry: European Recovered Paper Identification System (CEPI, 2008). This  
3413 document prescribes rules and guidance on necessary information and steps, with a delivery note  
3414 that shall be received at the reception of the mill.
- 3415 ● For beverage cartons no recycled content is used so far and thus sector specific rules are  
3416 redundant so far. However, if needed, the same guidelines as paper shall be used as being most  
3417 suitable (beverage cartons are covered by a recovered paper grade category under EN643).
- 3418 ● For the plastics industry: EN standard 15343:2007. This standard prescribes rules and guidelines on  
3419 traceability. The supplier of the recycle is requested to provide specific information.

3420

### 3421 **Recycling output rate (R<sub>2</sub>) for packaging**

3422 Background information used to calculate R<sub>2</sub> values for packaging is reported in – Background information  
3423 to calculate R<sub>2</sub> for packaging materials. It presents, per packaging application, the corresponding material  
3424 and default R<sub>2</sub> data source to be used, as available in – List of default values for A, R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub> and Q<sub>s</sub>/Q<sub>p</sub>  
3425 and Q<sub>s</sub>/Q<sub>p</sub>. The R<sub>2</sub> values may only be used after making an evaluation for recyclability based on three  
3426 criteria (as described by ISO 14021:1999 and in section 7.18.8). Sector-specific recyclability guidelines may  
3427 be used to show that a certain product is collected and recycled. For PET bottles the EPBP guidelines should  
3428 be used (epbp.org/design-guidelines), while for generic plastics the recyclability by design should be used  
3429 ([www.recoup.org](http://www.recoup.org)).

3430 **Table 32: Data source for R<sub>2</sub> per packaging application.**

Packaging application	Material	Data source R <sub>2</sub> (see Annex C)
Bag in Box - High barrier EVOH	Packaging film	Generic plastic packaging
Bag in Box - High barrier EVOH	HDPE tap	PET bottle
Bag in Box - High barrier EVOH	Corrugated board	Paper and cardboard
Aseptic beverage carton	Aluminium foil	Aluminium, Liquid beverage carton

Packaging application	Material	Data source R <sub>2</sub> (see Annex C)
Aseptic beverage carton	LDPE film	Generic plastics, Liquid beverage carton
Aseptic beverage carton	Liquid Packaging Board	Paper and cardboard, Liquid beverage carton
Beverage carton	LDPE film	Generic plastics, Liquid beverage carton
Beverage carton	Liquid Packaging Board	Paper and cardboard, Liquid beverage carton
Closure - Plastic cap PP	PP granulates	Generic plastic packaging
Closure - Plastic cap HDPE	HDPE granulates	PET bottle
Closure - Alu-Ring pull	Aluminium sheet	Aluminium cans
Closure - Alu-Screw cap	Aluminium foil	Aluminium cans
Closure - Tin plated steel	Tin plated steel (ETP)	Steel for packaging
Closure - ESSC steel-Pry off	Tin free steel (ECCS)	Steel for packaging
Closure - plastic cork stopper	LDPE cork	Generic plastic packaging
Crates - Plastic, HDPE	HDPE granulates	Generic plastic packaging
Crates - Plastic, PP	PP granulates	Generic plastic packaging
Packaging film - High barrier	PET/ALU/PE film	Generic plastic packaging
Packaging film - Medium barrier	PP film PP film	Generic plastic packaging
Packaging film - Low barrier	PP film PP film	Generic plastic packaging
Packaging film - High barrier PE/EVOH/PE	PE film EVOH film LDPE film	Generic plastic packaging
Flexible paper packaging	Kraft paper - uncoated	Paper and cardboard
Glass bottle, unspecified colour	Glass, unspecified colour	Container glass, unspecified colour
Glass bottle, colourless (flint)	Glass, unspecified colour	Container glass, colourless (flint)
Glass bottle, green colour	Glass, unspecified colour	Container glass, green colour

<b>Packaging application</b>	<b>Material</b>	<b>Data source R<sub>2</sub> (see Annex C)</b>
<b>Glass bottle, amber colour</b>	Glass, unspecified colour	Container glass, amber colour
<b>Label - Plastic self adhesive</b>	PP film	PET bottle
<b>Label - Plastic wrap around</b>	OPP film	PET bottle
<b>Label - Alu label Neck Foil</b>	Aluminium foil	Aluminium cans
<b>Label - Paper</b>	Kraft paper - uncoated	Paper and cardboard
<b>Label - Plastic</b>	PE film	Generic plastic packaging
<b>Plastic - Shrink Sleeve PET</b>	PET film	PET bottle
<b>Plastic - Shrink Sleeve PVC</b>	PVC film	PET bottle
<b>Plastic - Shrink Sleeve OPS</b>	PS film	PET bottle
<b>Can beverage - sanitary end aluminium</b>	Aluminium sheet	Aluminium cans
<b>Can beverage - body aluminium</b>	Aluminium sheet	Aluminium cans
<b>Can beverage - body steel</b>	Tin plated steel (ETP)	Steel for packaging
<b>Can Food - sanitary end aluminium</b>	Aluminium sheet	Aluminium cans
<b>Can Food - sanitary end tin plated steel</b>	Tin plated steel (ETP)	Steel for packaging
<b>Can Food - body ESSC</b>	Tin free steel (ECCS)	Steel for packaging
<b>Can Food - body aluminium</b>	Aluminium sheet	Aluminium cans
<b>Can Food - body tin plated steel</b>	Tin plated steel (ETP)	Steel for packaging
<b>Can - body ECCS PET coated</b>	Tin free steel (ECCS)	Steel for packaging
<b>Can - sanitary end ECCS PET coated</b>	Tin free steel (ECCS)	Steel for packaging
<b>Can non food - body tin plated steel - coated</b>	Tin plated steel (ETP)	Steel for packaging
<b>Can non food - sanitary end tin plated steel</b>	Tin plated steel (ETP)	Steel for packaging
<b>Can non food - body tin plated steel</b>	Tin plated steel (ETP)	Steel for packaging
<b>Aluminium tray</b>	Aluminium foil	Aluminium cans
<b>Pallet - Plastic, 80x120</b>	HDPE granulates	Generic plastic packaging
<b>Pallet - Plastic, 100x120</b>	HDPE granulates	Generic plastic packaging



<b>Packaging application</b>	<b>Material</b>	<b>Data source R<sub>2</sub> (see Annex C)</b>
<b>Pallet - Plastic, half</b>	HDPE granulates	Generic plastic packaging
<b>Paper sack</b>	Sack kraft paper	Paper, Paper sack
<b>Paper bag</b>	Kraft paper - uncoated	Paper, Paper bag
<b>Carton - box / inserts</b>	Cartonboard	Paper, Carton - box / inserts
<b>Solid board box</b>	Solid board	Paper, Solid board box
<b>Solid board box - bleached</b>	Solid bleached board	Paper, Solid board box - bleached
<b>Corrugated - pads / box / inserts</b>	Corrugated board	Paper, Corrugated - pads / box / inserts
<b>PET bottle transparent</b>	PET granulates, bottle grade	PET bottle
<b>PET Preform transparent</b>	PET granulates, bottle grade	PET bottle
<b>Plastic film - PET</b>	PET film	Generic plastic packaging
<b>Plastic film - PE</b>	PE film	Generic plastic packaging
<b>Plastic film - PP</b>	PP film	Generic plastic packaging
<b>Plastic film - OPP</b>	PP film	Generic plastic packaging
<b>Plastic film - PP strapping</b>	PP film	Generic plastic packaging
<b>Plastic film - PE wrapping</b>	PE film	Generic plastic packaging
<b>Plastic - Shrink wrap</b>	LDPE film	Generic plastic packaging
<b>Plastic - Stretch film</b>	LLDPE film	Generic plastic packaging
<b>Plastic bag - PE bag</b>	PE film	Generic plastic packaging
<b>Plastic bag - Dry food</b>	PP film	Generic plastic packaging
<b>Plastic bag - Dry food</b>	LDPE film	Generic plastic packaging
<b>Slipsheet / Plastic divider</b>	LDPE granulates	Generic plastic packaging
<b>Plastic Can - body PP</b>	PP granulates	Generic plastic packaging
<b>Plastic Can - sanitary end PP</b>	PP granulates	Generic plastic packaging
<b>Plastic Can - body HDPE</b>	HDPE granulates	Generic plastic packaging

Packaging application	Material	Data source R <sub>2</sub> (see Annex C)
Plastic Can - sanitary end HDPE	HDPE granulates	Generic plastic packaging
Plastic tray - Polypropylene	PP granulates	Generic plastic packaging
Corner foam - polyethylene	LDPE granulates	Generic plastic packaging
Corner foam - polystyrene	EPS beads	Generic plastic packaging
HDPE tap	HDPE granulates	Generic plastic packaging

3431

## 3432 7.19 Data requirements and quality requirements

### 3433 7.19.1 The materiality approach

3434 One of the main features of the PEF Guide is the attempt to operationalise the "materiality" approach, i.e.  
 3435 focusing where it really matters. In the PEF context, the materiality approach is developed around two  
 3436 main areas:

- 3437 • **Impact categories, life cycle stages, processes and elementary flows:** the PEFCR shall identify  
 3438 the most relevant ones. These should be the contributions where companies, stakeholders,  
 3439 consumers, and policy makers should focus (see section 7.4);
- 3440 • **Data requirements:** as the most relevant processes are those driving the environmental profile  
 3441 of a product, these shall be assessed by using data with higher quality compared to the less  
 3442 relevant processes, independently from where these processes happen in the life cycle of the  
 3443 product.

3444 Once the model(s) for the representative product(s) is developed, the TS shall address the following two  
 3445 questions:

- 3446 1. Which are the processes that are driving the environmental profile of the product (most  
 3447 relevant processes)?
- 3448 2. Which are the processes for which company-specific information is mandatory?

### 3449 7.19.2 DQR formula

3450 Within the EF context, the data quality of each dataset and the total EF study shall be calculated and  
 3451 reported. The calculation of the DQR shall be based on 4 data quality criteria:

3452

$$3453 \quad DQR = \frac{TeR+GR+TiR+P}{4} \quad \text{[Equation 20]}$$

3454 where TeR is the Technological-Representativeness, GR is the Geographical-Representativeness, TiR is the  
3455 Time-Representativeness, and P is the Precision/uncertainty. The representativeness (technological,  
3456 geographical and time-related) characterises to what degree the processes and products selected are  
3457 depicting the system analysed, while the precision indicates the way the data is derived and related level of  
3458 uncertainty. The PEFCR shall provide tables with the criteria to be used for the semi-quantitative  
3459 assessment of each criteria. The PEFCR may specify more stringent data quality requirements if appropriate  
3460 for the sector in question and specify additional criteria for the assessment of data quality.

3461 When a company-specific dataset is created, the data quality of the company-specific activity data, the  
3462 company specific emission data and the secondary sub-processes shall be assessed separately. The DQR of  
3463 the newly developed dataset shall be calculated as follow:

3464 1) Select the most relevant processes and direct elementary flows that account for at least 80% of the total  
3465 environmental impact of the company-specific dataset, listing them from the most contributing to the least  
3466 contributing one.

3467 2) Calculate the DQR criteria TeR, TiR, GR and P for each most relevant process and each most relevant  
3468 direct elementary flow. The values of each criteria shall be assigned based on the table on how to assess  
3469 the value of the DQR criteria for the processes provided in the PEFCR.

3470 2.a) Each most relevant elementary flow consists of the amount and elementary flow naming (e.g.  
3471 40 g carbon dioxide). For each most relevant elementary flow, the applicant of the PEFCR shall  
3472 evaluate the 4 DQR criteria named  $Te_{R-EF}$ ,  $Ti_{R-EF}$ ,  $Gr_{R-EF}$ ,  $P_{EF}$ . It shall be evaluated for example, the  
3473 timing of the flow measured, for which technology the flow was measured and in which  
3474 geographical area.

3475 2.b) Each most relevant process is a combination of activity data and the secondary dataset used.  
3476 For each most relevant process, the DQR is calculated by the applicant of the PEFCR as a  
3477 combination of the 4 DQR criteria for activity data and the secondary dataset: (i)  $Ti_R$  and P shall be  
3478 evaluated at the level of the activity data (named  $Ti_{R-AD}$ ,  $P_{AD}$ ) and (ii)  $Te_R$ ,  $Ti_R$  and  $Gr_R$  shall be  
3479 evaluated at the level of the secondary dataset used (named  $Te_{R-SD}$ ,  $Ti_{R-SD}$  and  $Gr_{R-SD}$ ). As  $Ti_R$  is  
3480 evaluated twice, the mathematical average of  $Ti_{R-AD}$  and  $Ti_{R-SD}$  represents the  $Ti_R$  of the most  
3481 relevant process.

3482 2.c) Considering that the data for the mandatory processes shall be company specific, the score of  
3483 P cannot be higher than 3 while the score for  $Ti_R$ ,  $Te_R$ , and  $Gr_R$  cannot be higher than 2 (The DQR  
3484 score shall be  $\leq 1.6$ ).

3485 3) Calculate the environmental contribution of each most-relevant process and elementary flow to the  
3486 total environmental impact of all most-relevant processes and elementary flows, in % (weighted using 13  
3487 EF impact categories, with the exclusion of the 3 toxicity-related ones). For example, the newly developed  
3488 dataset has only two most relevant processes, contributing in total to 80% of the total environmental  
3489 impact of the dataset:

- 3490       • Process 1 carries 30% of the total dataset environmental impact. The contribution of this process  
 3491       to the total of 80% is 37.5% (the latter is the weight to be used).
- 3492       • Process 1 carries 50% of the total dataset environmental impact. The contribution of this process  
 3493       to the total of 80% is 62.5% (the latter is the weight to be used).

3494       4) Calculate the  $T_{eR}$ ,  $T_{iR}$ ,  $G_R$  and  $P$  criteria of the newly developed dataset as the weighted average of each  
 3495       criteria of the most relevant processes and direct elementary flows. The weight is the relative contribution  
 3496       (in %) of each most relevant process and direct elementary flow calculated in step 3.

3497       5) The applicant of the PEFCR shall calculate the total DQR of the newly developed dataset using Equation  
 3498       21, where  $\overline{T_{eR}}$ ,  $\overline{G_R}$ ,  $\overline{T_{iR}}$ ,  $\overline{P}$  are the weighted average calculated as specified in point (4).

3499       
$$DQR = \frac{\overline{T_{eR}} + \overline{G_R} + \overline{T_{iR}} + \overline{P}}{4} \qquad \text{[Equation 21]}$$

3500       NOTE: in case the newly developed dataset has most relevant processes filled in by non-EF compliant  
 3501       datasets (and thus without DQR), then these datasets cannot be included in step 4 and 5 of the DQR  
 3502       calculation. (1) The weight of step 3 shall be recalculated for the EF-compliant datasets only. Calculate the  
 3503       environmental contribution of each most-relevant EF compliant process and elementary flow to the total  
 3504       environmental impact of all most-relevant EF compliant processes and elementary flows, in %. Continue  
 3505       with step 4 and 5. (2) The weight of the non-EF compliant dataset (calculated in step 3) shall be used to  
 3506       increase the DQR criteria and total DQR accordingly. For example:

- 3507       • Process 1 carries 30% of the total dataset environmental impact and is ILCD entry level compliant.  
 3508       The contribution of this process to the total of 80% is 37.5% (the latter is the weight to be used).
- 3509       • Process 1 carries 50% of the total dataset environmental impact and is EF compliant. The  
 3510       contribution of this process to all most-relevant EF compliant processes is 100%. The latter is the  
 3511       weight to be used in step 4.
- 3512       • After step 5, the parameters  $\overline{T_{eR}}$ ,  $\overline{G_R}$ ,  $\overline{T_{iR}}$ ,  $\overline{P}$  and the total DQR shall be multiplied with 1.375.

3513

3514       ***7.19.2.1 DQR tables for processes with company-specific data:***

3515       To allow the evaluation of the DQR of processes for which company-specific data are used, the PEFCR shall  
 3516       include at least one table on how to assess the value of the DQR criteria for these processes. The table(s) to  
 3517       be included in the PEFCR shall be based on

3518 Table 33. Only the reference years criteria  $T_{iR}$  ( $T_{iR-EF}$  and  $T_{iR-AD}$  and  $T_{iR-SD}$ ) might be adapted by the TS. It is not  
3519 allowed to modify the text for the other criteria.

3520

3521 **Table 33: How to assign the values to DQR criteria when using company-specific information.**

	<b>P<sub>EF</sub> and P<sub>AD</sub></b>	<b>T<sub>R-EF</sub> and T<sub>R-AD</sub></b>	<b>T<sub>R-SD</sub></b>	<b>Te<sub>R-EF</sub> and Te<sub>R-SD</sub></b>	<b>G<sub>R-EF</sub> and G<sub>R-SD</sub></b>
<b>1</b>	Measured/calculated <u>and</u> externally verified	The data refers to the most recent annual administration period with respect to the EF report publication date	The EF report publication date happens within the time validity of the dataset	The elementary flows and the secondary dataset reflect exactly the technology of the newly developed dataset	The data(set) reflects the exact geography where the process modelled in the newly created dataset takes place
<b>2</b>	Measured/calculated and internally verified, plausibility checked by reviewer	The data refers to maximum 2 annual administration periods with respect to the EF report publication date	The EF report publication date happens not later than 2 years beyond the time validity of the dataset	The elementary flows and the secondary dataset is a proxy of the technology of the newly developed dataset	The data(set) partly reflects the geography where the process modelled in the newly created dataset takes place
<b>3</b>	Measured/calculated/literature and plausibility not checked by reviewer OR Qualified estimate based on calculations plausibility checked by reviewer	The data refers to maximum three annual administration periods with respect to the EF report publication date	Not applicable	Not applicable	Not applicable
<b>4-5</b>	Not applicable	Not applicable	Not applicable	Not applicable	Not applicable

3522 **P<sub>EF</sub>**: Precision for elementary flows; **P<sub>AD</sub>**: Precision for activity data; **T<sub>R-EF</sub>**: Time Representativeness for elementary flows; **T<sub>R-AD</sub>**:  
 3523 Time representativeness for activity data; **T<sub>R-SD</sub>**: Time representativeness for secondary datasets; **Te<sub>R-EF</sub>**: Technology  
 3524 representativeness for elementary flows; **Te<sub>R-SD</sub>**: Technology representativeness for secondary datasets; **G<sub>R-EF</sub>**: Geographical  
 3525 representativeness for elementary flows; **G<sub>R-SD</sub>**: Geographical representativeness for secondary datasets.

3526 **7.19.2.2 DQR tables for processes for which secondary datasets are used**

3527 To allow the applicant to assess the context-specific DQR criteria **Te<sub>R</sub>**, **T<sub>R</sub>** and **G<sub>R</sub>** of most relevant processes,  
 3528 the PEFCR shall include at least one table on how to assess the criteria. The assessment of the **Te<sub>R</sub>**, **T<sub>R</sub>** and  
 3529 **G<sub>R</sub>** criteria shall be based on Table 34. Only the reference years for criteria **T<sub>R</sub>** might be adapted by the TS,  
 3530 per process. It is not allowed to modify the text for the other criteria.

3531 **Table 34: How to assign the values to DQR criteria when using secondary datasets.**

	<b>T<sub>R</sub></b>	<b>Te<sub>R</sub></b>	<b>G<sub>R</sub></b>
<b>1</b>	The EF report publication date happens within the time validity of the dataset	The technology used in the EF study is exactly the same as the one in scope of the dataset	The process modelled in the EF study takes place in the country the dataset is valid for

	<b>T<sub>R</sub></b>	<b>T<sub>eR</sub></b>	<b>G<sub>R</sub></b>
2	The EF report publication date happens not later than 2 years beyond the time validity of the dataset	The technologies used in the EF study is included in the mix of technologies in scope of the dataset	The process modelled in the EF study takes place in the geographical region (e.g. Europe) the dataset is valid for
3	The EF report publication date happens not later than 4 years beyond the time validity of the dataset	The technologies used in the EF study are only partly included in the scope of the dataset	The process modelled in the EF study takes place in one of the geographical regions the dataset is valid for
4	The EF report publication date happens not later than 6 years beyond the time validity of the dataset	The technologies used in the EF study are similar to those included in the scope of the dataset	The process modelled in the EF study takes place in a country that is not included in the geographical region(s) the dataset is valid for, but sufficient similarities are estimated based on expert judgement.
5	The EF report publication date happens later than 6 years after the time validity of the dataset	The technologies used in the EF study are different from those included in the scope of the dataset	The process modelled in the EF study takes place in a different country than the one the dataset is valid for

3532 **T<sub>R</sub>**: Time representativeness; **T<sub>eR</sub>**: Technology representativeness; **G<sub>R</sub>**: Geographic representativeness.

3533

### 3534 7.19.3 List of mandatory company-specific data

3535 The list of mandatory company-specific data refers to the activity data and (unit) processes for which  
3536 company-specific data shall be collected. This list defines the minimum requirements to be fulfilled by  
3537 companies that apply the PEFCR. The purpose is to avoid that an applicant without access to the relevant  
3538 company-specific data is able to perform a PEF study and communicate its results by only applying default  
3539 data and datasets. The PEFCR shall define the list of mandatory data.

3540 For the selection of the mandatory data, the TS shall consider its relevance within the EF profile, the level  
3541 of effort needed to collect these data (especially for SMEs) and the overall quantity of data / time required  
3542 to collect all mandatory company-specific data. This is very important and has two consequences: (i)  
3543 companies may perform a PEF study by only searching for these data and using default data for everything  
3544 outside this list, while (ii) companies who don't have company-specific data for one listed cannot establish  
3545 a PEFCR-compliant EF profile of the product in scope.

3546 For each process for which company-specific data is mandatory the developed dataset shall be EF  
3547 compliant and the PEFCR shall provide the following information:

- 3548 1. the list of the activity data to be declared by the applicant together with the default secondary  
3549 datasets to be used. The list of activity data shall be as specific as possible in terms of unit of  
3550 measures and any other characteristics that could help the applicant in implementing the PEFCR;

3551 2. the list of foreground elementary flows to be declared by the applicant. This is the list of most  
3552 relevant direct emissions. For each emission the PEFCR shall specify the frequency of  
3553 measurements, the measurement methods and any other technical information necessary to  
3554 ensure that the calculations of the PEF-profile are comparable.

3555 Considering that the data for the mandatory processes shall be company specific, the score of P cannot be  
3556 higher than 3 while the score for TiR, TeR, and GR cannot be higher than 2 (the DQR score shall be  $\leq 1.6$ ). To  
3557 assess the DQR , follow the requirements of



3558 Table 33.

3559 For mandatory processes selected as to be modelled with company-specific information, the PEFCR shall  
3560 follow the requirements set out in this section. For all other processes, the applicant shall apply the Data  
3561 Needs Matrix as explained in section 7.19.4.

#### 3562 **7.19.4 Data needs matrix (DNM)**

3563 All processes required to model the product and outside the list of mandatory company-specific shall be  
3564 evaluated using the Data Needs Matrix (see Table 35). The next section includes the rules to be followed  
3565 when developing a PEFCR, while section 7.19.4.2 includes the rules for the applicant of the PEFCR. The  
3566 options indicated for each situation are not listed in hierarchical order.

##### 3567 **7.19.4.1 Rules to be followed when developing a PEFCR**

3568 The PEFCR shall include the following information for all processes outside the list of mandatory company-  
3569 specific data:

- 3570 1. for all processes outside the list of mandatory company-specific processes, provide the list of  
3571 default secondary datasets to be used within the scope of the PEFCR, dataset name together with  
3572 the UUID of the aggregated version<sup>79</sup> and the node web address;
- 3573 2. report the default DQR values (for each criteria) as provided in their meta data, for all default EF  
3574 datasets listed;
- 3575 3. indicate the most relevant processes;
- 3576 4. provide one or more DQR table(s) for the most relevant processes;
- 3577 5. indicate the processes expected to be in situation 1;
- 3578 6. for those processes expected to be in situation 1, provide the list of activity data and elementary  
3579 flows to be declared by the applicant. This list shall be as specific as possible in terms of unit of  
3580 measurement, averaging data and any other characteristics that could help the applicant in  
3581 implementing the PEFCR.

##### 3582 **7.19.4.2 Rules for the applicant**

3583 The DNM shall be used by the PEFCR applicant to evaluate which data is needed and shall be used within  
3584 the modelling of its PEF, depending on the level of influence the applicant (company) has on the specific  
3585 process. The following three cases are found in the DNM and are explained below:  
3586

- 3587 1. **Situation 1:** the process is run by the company applying the PEFCR
- 3588 2. **Situation 2:** the process is not run by the company applying the PEFCR but the company has access  
3589 to (company-)specific information.

---

<sup>79</sup> Each EF compliant dataset tendered by the EC is available in both an aggregated and disaggregated (at level-1) form.

3590 3. **Situation 3:** the process is not run by the company applying the PEFCR and this company does not  
3591 have access to (company-)specific information.

3592

3593 A company implementing the PEFCR shall:

3594 1. determine the level of influence (Situation 1, 2 or 3 described below) the company has for each  
3595 process in its supply chain. This decision determines which of the options in Table 35 is pertinent for  
3596 each process;

3597 2. follow the rules of Table 35 for the most relevant processes and for the other processes.

3598 3. Calculate/re-evaluate the DQR values (for each criterion + total) for all the datasets used for the  
3599 most relevant processes and the new ones created. For all remaining 'other processes' the DQR  
3600 values reported in the PEFCR shall be used.

3601 4. if one or more processes are not included in the list of default processes in the PEFCR, then the  
3602 applicant shall identify a suitable dataset according to requirements provided in section 7.19.5.

3603 **Table 35: Data Needs Matrix (DNM) – Requirements for the applicant of the PEFCR. The options indicated for each**  
 3604 **situation are not listed in hierarchical order.**

		Most relevant process	Other process
<b>Situation 1:</b> process run by the company applying the PEFCR	Option 1	Provide company-specific data (as requested in the PEFCR) and create a company-specific dataset partially disaggregated at level 1 (DQR≤1.6)  Calculate the DQR values (for each criterion + total)	
	Option 2		Use default secondary dataset in PEFCR, in aggregated form (DQR≤3.0)  Use the default DQR values
<b>Situation 2:</b> process <u>not</u> run by the company applying the PEFCR but with access to company-specific information	Option 1	Provide company-specific data (as requested in the PEFCR) and create a company-specific dataset partially disaggregated at level 1 (DQR≤1.6)  Calculate the DQR values (for each criterion + total)	
	Option 2	Use company-specific activity data for transport (distance), and substitute the sub-processes used for electricity mix and transport with supply-chain specific EF compliant datasets (DQR≤3.0)  Re-evaluate the DQR criteria within the product specific context	
	Option 3		Use company-specific activity data for transport (distance), and substitute the sub-processes used for electricity mix and transport with supply-chain specific EF compliant datasets (DQR≤4.0)  Use the default DQR values
<b>Situation 3:</b> process <u>not</u> run by the company applying the PEFCR and without access to company-specific information	Option 1	Use default secondary data set in aggregated form (DQR≤3.0)  Re-evaluate the DQR criteria within the product specific context	
	Option 2		Use default secondary data set in aggregated form (DQR≤4.0)  Use the default DQR values

3605

3606 **7.19.4.3 DNM, situation 1**

3607 For each process in situation 1 there are two possible options:

- 3608 ● The process is in the list of most relevant processes as specified in the PEFCR or is not in the list of
- 3609 most relevant process, but still the company wants to provide company specific data (option 1);
- 3610 ● The process is not in the list of most relevant processes and the company prefers to use a
- 3611 secondary dataset (option 2).
- 3612

3613 **Situation 1/Option 1**

3614 For all processes run by the company and where the company applying the PEFCR uses company specific

3615 data. The DQR of the newly developed dataset shall be evaluated as described in section 7.19.2 while using

3616 the PEFCR specific DQR tables.

3617 **Situation 1/Option 2**

3618 For the non-most relevant processes only, if the applicant decides to model the process without collecting

3619 company-specific data, then the applicant shall use the secondary dataset listed in the PEFCR together with

3620 its default DQR values listed in the PEFCR.

3621 If the default dataset to be used for the process is not listed in the PEFCR, the applicant of the PEFCR shall

3622 take the DQR values from the metadata of the original dataset.

3623 **7.19.4.4 DNM, situation 2**

3624 When a process is in situation 2 (i.e. the company applying the PEFCR is not running the process but has

3625 access to company-specific data) there are two possible options:

- 3626
- 3627 ● The company applying the PEFCR has access to extensive supplier-specific information and wants
- 3628 to create a new EF-compliant dataset (Option 1);
- 3629 ● The company has some supplier-specific information and want to make some minimum changes
- 3630 (Option 2).
- 3631 ● The process is not in the list of most relevant processes and the company prefers to use a
- 3632 secondary dataset (option 3).

3633 **Situation 2/Option 1**

3634 For all processes run by the company and where the company applying the PEFCR uses company specific

3635 data. The DQR of the newly developed dataset shall be evaluated as described in section 7.19.2 while using

3636 the PEFCR specific DQR tables.

3637 **Situation 2/Option 2**

3638 Company-specific activity data for transport are used and the sub-processes used for electricity mix and  
3639 transport with supply-chain specific PEF compliant datasets are substituted starting from the default  
3640 secondary dataset provided in the PEFCR.

3641 Please note that, the PEFCR lists all dataset names together with the UUID of their aggregated dataset. For  
3642 this situation, the disaggregated version of the dataset is required.

3643 The applicant of the PEFCR shall recalculate the DQR criteria for the processes in Situation 2, Option 2. It  
3644 shall make the DQR context-specific by re-evaluating  $T_{eR}$  and  $T_{iR}$  using the table(s) provided in the PEFCR  
3645 (adapted from

3646 Table 33). The criteria  $G_R$  shall be lowered by 30%<sup>80</sup> and the criteria P shall keep the original value.

3647 **Situation 2/Option 3**

3648 For the non-most relevant processes, the applicant may use the corresponding secondary dataset listed in  
3649 the PEFCR together with its DQR values.

3650 If the default dataset to be used for the process is not listed in the PEFCR, the applicant of the PEFCR shall  
3651 take the DQR values from the original dataset.

3652 ***7.19.4.5 DNM, situation 3***

3653 When a process is in situation 3 (i.e. the company applying the PEFCR is not running the process and this  
3654 company does not have access to company-specific data), there are two possible options:

3655

- 3656 ● It is in the list of most relevant processes (situation 3, option 1)
- 3657 ● It is not in the list of most relevant processes (situation 3, option 2)

3658 **Situation 3/Option 1**

3659 In this case, the applicant of the PEFCR shall take the DQR values from the PEFCR.

3660 If the default dataset used for the process is not listed in the PEFCR, the applicant of the PEFCR shall make  
3661 the DQR criteria context-specific by re-evaluating  $T_{eR}$ ,  $T_{iR}$  and  $G_R$  using the table(s) provided in the PEFCR  
3662 (adapted from

---

<sup>80</sup> In situation 2, option 2 it is proposed to lower the parameter  $G_R$  by 30% in order to incentivize the use of company specific information and reward the efforts of the company in increasing the geographic representativeness of a secondary dataset through the substitution of the electricity mixes and of the distance and means of transportation.

3663 Table 33). The parameter P shall keep the original value.

### 3664 **Situation 3/Option 2**

3665 For the non-most relevant processes, the applicant shall use the corresponding secondary dataset listed in  
3666 the PEFCR together with its DQR values.

3667 If the default dataset to be used for the process is not listed in the PEFCR, the applicant of the PEFCR shall  
3668 take the DQR values from the original dataset.

### 3669 **7.19.5 Which datasets to use?**

3670 For the PEFCR screenings and supporting studies: the TS shall use EF-compliant datasets when available. In  
3671 case an EF-compliant dataset does not exist, an EF-compliant proxy shall be used and if not available, a  
3672 non-EF compliant dataset may be used.

3673 For the final PEFCR representative product calculations, the following rules shall be followed in hierarchical  
3674 order:

- 3675 ● An EF-compliant proxy is available: it shall be included in the list of default processes of the  
3676 PEFCR and stated within the limitations chapter (B.3.6).
- 3677 ● An ILCD-entry level-compliant (EL) proxy is freely available: it shall not be included in the list of  
3678 default processes of the PEFCR. The proxy shall be listed in the data gaps of the PEFCR  
3679 (chapter B.5.3) using the following text: "These datasets are used as proxy within the  
3680 calculations of the representative product. However, the applicant of the PEFCR shall apply an  
3681 EF-compliant dataset if available (following the rules layout in chapter B.5.6 on which dataset  
3682 to use). If this is not available, the applicant shall use these proxies."
- 3683 ● If no EF-compliant or ILCD-entry level-compliant proxy is freely available: it shall be excluded  
3684 from the model. This shall be clearly stated in the PEFCR as a data gap (chapter B.5.3).

3685  
3686 Exception: Among the EF tendered datasets integrated modelling inconsistencies may arrive (e.g., glass  
3687 default dataset uses 50/50 at input side, but then is modelled with CFF at output side; while plastics is fully  
3688 modelled with CFF). The aim for consistency within the PEFCR is preferred. An ILCD- entry level-compliant  
3689 dataset or proper modelling proxy may be chosen above an EF-compliant dataset to achieve consistency.  
3690 This shall be justified in the PEFCR.

3691 For the PEFCR applicant, the secondary datasets to be used are those listed in the PEFCR. Whenever a  
3692 dataset needed to calculate the PEF-profile is not among those listed, the following rules shall be followed  
3693 in hierarchical order:

- 3694 ● Use an EF-compliant dataset available on one of the following nodes:
  - 3695 ○ <http://eplca.jrc.ec.europa.eu/EF-node/>
  - 3696 ○ <http://lcdn.blonkconsultants.nl>
  - 3697 ○ <http://ecoinvent.lca-data.com>

- 3698                   ○ <http://lcdn-cepe.org>  
3699                   ○ <https://lcdn.quantis-software.com/PEF/>  
3700                   ○ <http://lcdn.thinkstep.com/Node>  
3701                   ● Use an EF-compliant dataset available in a free or commercial source;  
3702                   ● Use another EF-compliant dataset considered to be a good proxy. In such case this  
3703 information shall be included in the "limitation" section of the PEF report.  
3704                   ● Use an ILCD-entry level-compliant dataset. In such case this information shall be included  
3705 in the "data gap" section of the PEF report.  
3706

#### 3707 **7.19.6 The DQR of the study**

3708 The PEFCR shall require the *delivery of an EF-compliant dataset of the product in scope (meaning, the EF*  
3709 *study)*. The DQR of this dataset shall be calculated and the EF report shall report it.

3710 In order to calculate the DQR of the EF study, the applicant shall calculate separately the TeR, TiR, GR and P  
3711 for the EF study as the weighted average of all most relevant processes, based on their relative  
3712 environmental contribution to the total single score (excluding the 3 toxicity-related ones). The detailed  
3713 DQR calculation rules of section 7.19.2 shall be followed.

#### 3714 **7.20 Benchmark**

3715 The benchmark calculation is only applicable for final products. It shall be provided for each RP and shall  
3716 correspond to the PEF profile modelled after the supporting studies results are taken into consideration.

3717 The benchmark shall be provided in the PEFCR both as characterised, normalised and weighted results for  
3718 each of the EF impact categories (not only the most relevant ones, and climate change sub-categories if  
3719 relevant) and as a single score based on the weighting factors provided in Annex A. In all cases the three  
3720 toxicity related impact categories shall be excluded. However, the TS may add an additional chapter to the  
3721 PEFCR (outside the benchmark) where it displays the toxicity results of the selected ICs and clearly  
3722 describes the existing limitations of the underlying method.

3723 No benchmarking is allowed for intermediate products. The reporting of the characterised results  
3724 calculated for each intermediate RP is optional in the PEFCR, but mandatory in the PEF study and PEF  
3725 report.

3726

#### 3727 **7.21 Classes of performance**

3728 Within the pilot phase, the PEFCRs shall not include information on classes of performance.

3729



# 3730 8 Verification and validation of EF 3731 studies, reports, and 3732 communication vehicles 3733

## 3734 8.1 Defining the scope of the verification

3735 Verification and validation of the EF study is mandatory whenever the EF study, or part of the information  
3736 therein, is used for any type of external communication (i.e. communication to any interested party other  
3737 than the commissioner or the practitioner of the study).

3738  
3739 **Verification** means the conformity assessment process carried out by an environmental footprint verifier  
3740 to demonstrate whether the EF study has been carried out in compliance with the PEFCR it declares  
3741 compliance with and/or the most updated version of the PEF method adopted by the Commission.

3742 **Validation** means the confirmation by the environmental footprint verifier who carried out the verification,  
3743 that the information and data included in the EF study, EF report and the communication vehicles are  
3744 reliable, credible and correct.

3745  
3746 The verification and validation shall cover the following three areas:

- 3747 1. the EF study (including, but not limited to, the data collected, calculated, and estimated and the  
3748 underlying model)
- 3749 2. the EF report
- 3750 3. the technical content of the communication vehicles.

3751  
3752 The verification of the **EF study** shall ensure that:

- 3753 - the EF study is conducted in compliance with the most recent PEFCR, if available;
- 3754 - if a PEFCR is not available, the EF study is conducted in compliance with the most recent version of  
3755 the PEFCR Guidance and the PEF method, all EF methodological requirements, including the use of  
3756 the predefined characterisation, normalisation and weighting factors, are fulfilled;

3757  
3758 The validation of information in the EF study shall ensure that:

- 3759 - the data and information used for the EF study are consistent, reliable and traceable;
- 3760 - the calculations performed do not include mistakes.

3761  
3762 The verification and validation of the **EF report** shall ensure that:

- 3763 - the EF report is complete, consistent, and compliant with the EF study template provided in the  
3764 most recent version of the PEFCR Guidance;

- 3765 - the information and data included are consistent, reliable and traceable;  
3766 - the mandatory information and sections are included and appropriately filled in;  
3767 - All the technical information that could be used for communication purposes, independently from  
3768 the communication vehicle to be used, are included in the report;

3769  
3770 **Note:** whilst confidential information may be excluded from the EF report, this information shall be subject  
3771 to validation.

3772

3773 The validation of the **communication vehicle** content shall ensure that:

- 3774 - The technical information and data included are reliable and consistent with the information  
3775 included in the EF study and in the EF report.

## 3776 8.2 Verification procedure

3777 The verification procedure covers the following steps:

- 3778 • First, the commissioner shall select the verifier or verification team following the rules outlined in  
3779 section 8.3.1;
- 3780 • Second, the verification is performed following the verification process described in section 8.4;
- 3781 • Third, the verifier communicates to the commissioner any misstatements, non-conformities and  
3782 need for clarifications (section 8.3.2), and drafts the validation statement (section 8.5.2);
- 3783 • Fourth, the commissioner responds to the verifier's comments and introduces necessary  
3784 corrections and changes (if needed) to ensure the final compliance of the EF study, EF report and  
3785 EF communication vehicles. If, in the verifier's judgement, the commissioner does not respond  
3786 appropriately within a reasonable time period, the verifier shall issue a modified validation  
3787 statement or withdraw from the verification process;
- 3788 • Fifth, the final validation statement is provided, considering (if needed) the corrections and  
3789 changes introduced by the commissioner;
- 3790 • Sixth, surveillance of the EF study respective the EF report is provided during the validity of the EF  
3791 report (as defined in 8.5.3).

3792 If a matter comes to the verifier's attention that causes the verifier to believe in the existence of fraud or  
3793 noncompliance with laws or regulations, the verifier shall communicate this immediately to the  
3794 commissioner of the study.

3795

## 3796 8.3 Verifier(s)

3797 The verification/validation may be performed by a single verifier or by a verification team. In line with ISO  
3798 14025, the verifier(s) may be internal or external. In particular:

- 3799 - for business to consumer (B2C) communications, the independent verifier(s) shall be external to  
3800 the organisation that conducted the EF study;
- 3801 - for business to business (B2B) communications, the independent verifiers may be either internal or  
3802 external to the organisation that conducted the EF study.

3803 In any case the independency of the verifiers shall be guaranteed (i.e. they shall fulfil the intentions in the  
 3804 requirements of ISO/IEC 17020:2012 regarding a 3th party verifier, they shall not have conflicts of interests  
 3805 on concerned products and cannot include members of the Technical Secretariat or of the consultants  
 3806 involved in previous part of the work - screening studies, supporting studies, PEFCR review, etc). The  
 3807 minimum requirements and score for the verifier(s) as specified below shall be fulfilled. If the  
 3808 verification/validation is performed by a single verifier, he/she shall satisfy all the minimum requirements  
 3809 and the minimum score; if the verification/validation is performed by a team, the team as a whole shall  
 3810 satisfy all the minimum requirements and the minimum score. The documents proving the qualifications of  
 3811 the verifier(s) shall be provided as annex to the verification report or they shall be made available  
 3812 electronically.

3813 In case a verification team is established, one of the members of the verification team shall be appointed as  
 3814 lead verifier.

### 3815 8.3.1 Minimum requirements for verifier(s)

3816 The assessment of the competences of verifier/verification team is based on a scoring system that takes  
 3817 into account (i) verification and validation experience, (ii) EF/LCA methodology and practice, and (iii)  
 3818 knowledge of relevant technologies, processes or other activities included in the product(s)/organization(s)  
 3819 in scope of the study. Table 36 presents the scoring system for each relevant competence and experience  
 3820 topic.

3821 Unless otherwise specified in the context of the intended application, the verifier’s self- based declaration  
 3822 on the scoring system constitutes the minimum requirement. Verifier(s) shall provide a self-declaration of  
 3823 their qualifications (e.g. university diploma, working experience, certifications, etc), stating how many  
 3824 points they achieved for each criterion and the total points achieved. This self-declaration shall form part of  
 3825 the EF verification report.

3826 A verification of an EF study shall be conducted as per the requirements of the intended application. Unless  
 3827 otherwise specified, the minimum necessary score to qualify as a verifier or a verification team is six points,  
 3828 including at least one point for each of the three mandatory criteria (i.e. verification and validation  
 3829 practice, EF/LCA methodology and practice, and knowledge of technologies or other activities relevant to  
 3830 the EF study).

3831 **Table 36: Scoring system for each relevant competence and experience topic for the assessment of the competences of**  
 3832 **verifier(s)**

			Score (points)				
	Topic	Criteria	0	1	2	3	4
Mandatory criteria	Verification and validation practice	Years of experience (1)	<2	$2 \leq x < 4$	$4 \leq x < 8$	$8 \leq x < 14$	$\geq 14$
		Number of verifications (2)	$\leq 5$	$5 < x \leq 10$	$11 \leq x \leq 20$	$21 \leq x \leq 30$	$>30$
	LCA methodology and practice	Years of experience (3)	<2	$2 \leq x < 4$	$4 \leq x < 8$	$8 \leq x < 14$	$\geq 14$
		Number of LCA studies or reviews	$\leq 5$	$5 < x \leq 10$	$11 \leq x \leq 20$	$21 \leq x \leq 30$	$>30$

			Score (points)				
	Topic	Criteria	0	1	2	3	4
		(4)					
	Knowledge of the specific sector	Years of experience (5)	<1	1 ≤ x < 3	3 ≤ x < 6	6 ≤ x < 10	≥10
<b>Additional criteria</b>	Review, verification/validation practice	Optional scores relating to verification/validation	— 2 points: Accreditation as third party verifier for EMAS — 1 point: Accreditation as third party reviewer for at least one EPD Scheme, ISO 14001, or other EMS				

3833 (1) Years of experience in the field of environmental verifications and/or review of LCA/PEF/EPD studies.

3834 (2) Number of verifications for EMAS, ISO 14001, International EPD scheme or other EMS.

3835 (3) Years of experience in the field of LCA modelling. Eventual work done during master and bachelor degrees shall be excluded.  
 3836 Work done during a relevant Ph.D./Doctorate course shall be accounted for. Experience in LCA modelling includes, among others:

- 3837
- LCA modelling in commercial and non-commercial software
- 3838
- Datasets and database development

3839 (4) Studies compliant with one of the following standards/methods: PEF, OEF, ISO 14040-44, ISO 14067, ISO 14025

3840 (5) Years of experience in a sector related to the studied product(s). The experience in the sector can be gained through LCA  
 3841 studies or through other types of activities. . The LCA studies shall be done on behalf of and with access to primary data of the  
 3842 producing/operating industry. The qualification of knowledge about technologies or other activities is assigned according to the  
 3843 classification of NACE codes (*Regulation (EC) No 1893/2006 of the European Parliament and of the Council of 20 December 2006*  
 3844 *establishing the statistical classification of economic activities - NACE Revision 2*). Equivalent classifications of other international  
 3845 organisations may also be used. Experience gained with technologies or processes in a whole sector are considered valid for any of  
 3846 its sub-sectors..

### 3847 8.3.2 Role of the lead verifier in the verification team

3848 The lead verifier is a team member with additional tasks. The lead verifier shall:

- 3849 — distribute the tasks to be fulfilled between the team members according to the specific
- 3850 competencies of the team members, in order to get the full coverage of the tasks to be done and
- 3851 to use in the best manner the specific competencies of the team members;
- 3852 — coordinate the whole verification/validation process and ensure that all team members have a
- 3853 common understanding of the tasks they need to fulfil;
- 3854 — assemble all comments and ensure they are communicated to the commissioner of the EF study in
- 3855 a clear and comprehensible way;
- 3856 — resolve any conflicting statements between team members;
- 3857 — ensure that the verification report and validation statement are generated and are signed by each
- 3858 member of the verification team.

3859 **8.4 Verification/validation requirements**

3860 The verifier(s) shall describe all the outcomes related to the verification of the EF study, EF report and EF  
3861 communication vehicles and give the commissioner of the EF study the opportunity to improve the work, if  
3862 necessary. Depending on the nature of the outcomes, additional iterations of comments and responses  
3863 may be necessary. Any changes made in response to the verification outcomes shall be documented in the  
3864 verification report.

3865 The verification/validation shall be done as a combined documental review and a model validation.

- 3866 • the documental review includes the EF report, the technical content of any communication vehicle,  
3867 and the data used in the calculations (through requested underlying documents). Verifier(s) may  
3868 organise the documental review either as an “on desk” or “on site” exercise, or as a mix of the two.  
3869 The verification of the company-specific data shall always be organised through a visit of the  
3870 production site(s) the data refer to.
- 3871 • the validation of the model may take place at the production site of the commissioner of the study  
3872 or be organised remotely. The verifier(s) shall access the model in order to verify its structure, the  
3873 data used, and its consistency with the EF report. The details about how the verifier(s) accesses the  
3874 model shall be agreed by the commissioner of the EF study and the verifier(s).

3875 The verification may take place at the end of the EF study or in parallel (concurrent) to the study.

3876 **8.4.1 Requirements for the verification/validation when a PEFCR is available**

3877 The verifier(s) shall verify that the EF report, EF communication (if any) and EF study is in compliance with  
3878 the following standards/guidance documents:

- 3879 a) most recent version of PEFCR applicable for the specific product/sector in scope.
- 3880 b) conformance with the latest official version of the PEF method;
- 3881 c) conformance with the ISO 14040 series of standards, for any requirement not covered in the PEF  
3882 method or in the PEFCR guidance. In case of conflicting requirements, the EF ones prevail;
- 3883 d) conformance with the ISO 14020 series of standard for communication vehicles, if applicable.

3884  
3885 Moreover, the verifier(s) shall ensure that data verification/validation includes:

- 3886
- 3887 e) coverage, precision, completeness, representativeness, consistency, reproducibility, sources and  
3888 uncertainty;
- 3889 f) plausibility, quality and accuracy of the LCA-based data;
- 3890 g) quality and accuracy of additional environmental information;
- 3891 h) quality and accuracy of the supporting information.

3892

3893 The validation of the EF report and EF communication shall be carried out by checking enough information  
3894 to provide reasonable assurance that the EF report and communication fulfils all the conditions listed in  
3895 section 8.4.1.1.

3896 The verification and validation of the EF study shall be carried out by following the minimum requirements  
3897 listed below and the additional PEFCR-specific requirements specified by the TS and documented in the  
3898 PEFCR section "Verification".

#### 3899 **8.4.1.1 Minimum requirements for the verification and validation of the EF study**

3900 The verifier(s) shall validate the accuracy and reliability of the quantitative information used in the  
3901 calculation of the study. As this may be highly resource intensive, the following requirements shall be  
3902 followed:

- 3903 • the verifier shall check if the correct version of all impact assessment methods was used. For each  
3904 of the most relevant impact categories, at least 50% of the characterisation factors (for each of the  
3905 most relevant EF impact categories) shall be verified, while all normalisation and weighting factors  
3906 of all ICs shall be verified. In particular, the verifier shall check that the characterisation factors  
3907 correspond to those included in the EF impact assessment method the study declares compliance  
3908 with<sup>81</sup>;
- 3909 • all the newly created datasets shall be checked on their EF compliancy (for the meaning of EF  
3910 compliant datasets refer to Annex I of the Guidance). All their underlying data (elementary flows,  
3911 activity data and sub processes) shall be validated. The aggregated EF-compliant dataset of the  
3912 product in scope (meaning, the EF study) is available on the EF node  
3913 (<http://eplca.jrc.ec.europa.eu/EF-node/>).
- 3914 • for at least 70% of the most relevant processes in situation 2 option 2 of the DNM, 70% of the  
3915 underlying data shall be validated. The 70% data shall including all energy and transport sub  
3916 processes for those in situation 2 option 2;
- 3917 • for at least 60% of the most relevant processes in situation 3 of the DNM, 60% of the underlying  
3918 data shall be validated;
- 3919 • for at least 50% of the other processes in situation 1, 2 and 3 of the DNM, 50% of the underlying  
3920 data shall be validated.

3921  
3922 The selection of the processes to be validated for each situation shall be done ordering them from the  
3923 most contributing to the less contributing one and selecting those contributing up to the identified  
3924 percentage starting from the most contributing ones. In case of non-integer numbers, the rounding shall be  
3925 made always considering the next upper integer.

3926 For all processes to be validated, it shall be checked if the DQR satisfies the minimum DQR as specified in  
3927 the PEFCR.

3928 These data checks shall include, but should not be limited to, the activity data used, the selection of  
3929 secondary sub-processes, the selection of the direct elementary flows and the CFF parameters. For

---

<sup>81</sup> Available at: <http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>

3930 example, if there are 5 processes and each one of them includes 5 activity data, 5 secondary datasets and  
3931 10 CFF parameters, then the verifier(s) has to check at least 4 out of 5 processes (70%) and, for each  
3932 process, (s)he shall check at least 4 activity data (70% of the total amount of activity data), 4 secondary  
3933 datasets (70% of the total amount of secondary datasets), and 7 CFF parameters (70% of the total amount  
3934 of CFF parameters), i.e. the 70% of each of data that could be possible subject of check.

#### 3935 **8.4.1.2 Additional requirements for the validation of the EF study**

3936 The PEFCR may specify additional requirements for the validation that should be added to the minimum  
3937 requirements stated in this document. The verifier(s) shall check that all the minimum and additional  
3938 requirements are satisfied during the verification process.

#### 3939 **8.4.2 Requirements for the verification and validation where no PEFCR is available**

3940 During the transition phase or until a European policy regulating EF-based information is adopted by the  
3941 Commission, it is not recommended to carry out any communication of the environmental profile of a  
3942 product or organisation in absence of a valid PEFCR<sup>82</sup>.

3943 In any case, if and when such a study is carried out, it shall be subject to an independent third party review  
3944 carried out in accordance to ISO 14044, ISO 14071 and all complementary requirements included in this  
3945 Guidance with reference to review of PEFCRs.

#### 3946 **8.4.3 Verification and Validation techniques**

3947 The verifier shall assess and confirm whether the calculation methodologies applied are of acceptable  
3948 accuracy, reliable, are appropriate and performed in accordance to these guidelines. The verifier shall  
3949 confirm the correct application of conversion of measurement units.

3950 The verifier shall check if applied sampling procedures are in accordance with the sampling procedure  
3951 defined in the guidance document and PEFCR if available. The data reported shall be checked against the  
3952 source documentation in order to check their consistency.

3953 The verifiers shall evaluate whether the methods for making estimates are appropriate and have been  
3954 applied consistently.

3955 The verifier may assess alternatives to estimations or choices made, in the assertion to determine whether  
3956 a conservative choice has been selected.

3957 The verifier may identify uncertainties that are greater than expected and assess the effect of the identified  
3958 uncertainty on the final EF results.

#### 3959 **8.4.4 Data confidentiality**

3960 Data for validation shall be presented in a systematic and comprehensive way, all the project  
3961 documentation supporting the validation of an EF study shall be provided to the verifier(s), including the EF

---

<sup>82</sup> A PEFCR is considered valid if it is included in the list available on DG ENV website at [http://ec.europa.eu/environment/eussd/smgp/PEFCR\\_OEFSR.htm](http://ec.europa.eu/environment/eussd/smgp/PEFCR_OEFSR.htm) (this page will be available once the final PEFCRs are delivered)

3962 model, the confidential information and data. This data and information shall be treated as confidential  
3963 and shall be used only during the verification process.

- 3964  
3965 Confidential information may be excluded from the report, provided that:
- 3966 - the request for non-disclosure only cover input-information, not any output information;
  - 3967 - the commissioner of the EF study provides the verifier with sufficient information of the nature of  
3968 the data and information, and the reason for the request of excluding the data or information from  
3969 the study report;
  - 3970 - the verifier accept the non-disclosure and include in the verification report the reasons for doing  
3971 so;
  - 3972 - the commissioner of the EF study keep a file of the non-disclosed information for possible future  
3973 re-evaluation of the decision of non-disclosure.

3974  
3975 Business data could be of confidential nature because of competitive business aspects, intellectual  
3976 property rights or similar legal restrictions. Therefore, business data identified as confidential and provided  
3977 during validation process shall be kept confidential. Hence, verifiers shall not disseminate or otherwise  
3978 retain for use, without the permission of the organisation, any information disclosed to them during the  
3979 course of the review work. The Commissioner of the EF study may ask to the verifier(s) to sign a Non-  
3980 Disclosure Agreement (NDA).

3981

## 3982 **8.5 Outputs of the verification/validation process**

### 3983 **8.5.1 Content of the verification and validation report**

3984 The verification and validation report shall include all findings of the verification/validation process, the  
3985 actions taken from the commissioner in order to answer to the comments of the verifier(s), and the final  
3986 conclusion. The report is mandatory, but may be confidential.

- 3987  
3988 The final conclusion may be of different nature:
- 3989 • "compliant" if the documental or onsite information proves that the requirements of this chapter  
3990 are fulfilled.
  - 3991 • "not compliant" if the documental or onsite information proves that the requirements of this  
3992 chapter are not fulfilled.
  - 3993 • "complementary information needed" if the documental or onsite information cannot allow the  
3994 verifier to conclude on the compliancy. It may happen if the information is not transparently or  
3995 sufficiently documented or registered.

3996



3997 **8.5.2 Content of the validation statement**

3998 The validation statement is mandatory and shall always be provided as annex of the public EF report. As a  
3999 consequence, from each communication vehicles it shall be possible to have access to the complete public  
4000 EF report, including the validation statement.

4001 The following elements and aspects shall be included in the validation statement as a minimum:

- 4002 — title of the EF study under verification/validation, together with the exact version of the  
4003 report to which the validation statement belongs;
- 4004 — the commissioner of the EF study;
- 4005 — the practitioner of the EF study;
- 4006 — the verifier(s) or, in the case of a verification team, the team members with the  
4007 identification of the lead verifier;
- 4008 — absence of conflicts of interest of the verifier(s) with respect to concerned products and  
4009 any involvement in previous work (PEFCR development, Technical Secretariat membership,  
4010 consultancy work carried out for the applicant during the last three years);
- 4011 — a description of the objective of the verification/validation;
- 4012 — a statement of the result of the verification/validation;
- 4013 — Any limitations of the verification/validation outcomes;
- 4014 — date in which the validation statement has been issued;
- 4015 — signature by the verifier(s).

4016

4017 **8.5.3 Validity of the verification and validation report and the validation statement**

4018 A verification and validation report and a validation statement shall refer only to one specific EF report. The  
4019 verification and validation report and a validation statement shall unambiguously identify the specific EF  
4020 study under verification (e.g. by including the title, the commissioner of the EF study, the practitioner of  
4021 the EF study, etc.), together with the explicit version of the final EF report to which the verification and  
4022 validation report and a validation statement apply (e.g. by including the report date, the version number,  
4023 etc.).

4024 Both the verification and validation report and the validation statement shall be completed on the basis of  
4025 the final EF report, after the implementation of all the corrective actions requested by the verifier(s). They  
4026 shall be signed, physically or electronically, by the verifier(s).

4027 The maximum validity of the verification and validation report and of the validation statement shall not  
4028 exceed three years starting from their first issue date.

4029 During the validity period of the verification, surveillance follow up shall be agreed between the  
4030 commissioner of the EF study and the verifier(s) in order to evaluate if the content is still consistent with  
4031 the current situation (the suggested periodicity for this follow up is once per year).

4032 The periodic checks shall focus on the parameters that according to the verifiers might lead to relevant  
4033 changes in the results of the EF study. A non-exhaustive list of such parameters is:

- 4034 • bill of material/ bill of components;
- 4035 • energy mix used for processes in situation 1;
- 4036 • change of packaging;
- 4037 • changes in the suppliers (materials/geography);
- 4038 • changes in the logistics;
- 4039 • relevant technological changes in the processes in situation 1.

4040 At the time of the periodic check the reasons for non-disclosure of information should also be reconsidered.

4041 The surveillance verification may be organised as a documental check and/or through on-site inspections.

4042 Regardless of the validity, the EF study (and consequently the EF report) shall be updated during the surveillance period if one of the impact categories indicators communicated has worsened by more than 10.0% compared with the verified data, or if the total aggregated score has worsened by more than 5.0% compared with the verified data.

4046 If these changes impact also in the communication content, they shall be updated accordingly.

4047

## 9 References

- 4048
- 4049
- 4050 ANIA and ADEME. (2012). *Projet de référentiel transversal d'évaluation de l'impact environnemental des*  
4051 *produits alimentaires (mainly annexe 4) (« GT1 »)*, 23/04/12.
- 4052 Årsrapport (2013). Dansk retursystem.
- 4053 Beck, T., Bos, U., Wittstock, B., Baitz, M., Fischer, M., Sedlbauer, K. (2010). 'LANCA Land Use Indicator Value  
4054 Calculation in Life Cycle Assessment – Method Report', Fraunhofer Institute for Building Physics.
- 4055 Bos U., Horn R., Beck T., Lindner J.P., Fischer M. (2016). LANCA® - Characterisation Factors for Life Cycle  
4056 Impact Assessment, Version 2.0, 978-3-8396-0953-8Fraunhofer Verlag, Stuttgart.
- 4057 Boucher, O., P. Friedlingstein, B. Collins, and K. P. Shine, (2009). The indirect global warming potential and  
4058 global temperature change potential due to methane oxidation. *Environ. Res. Lett.*, 4, 044007.
- 4059 BSI (2011). PAS 2050:2011. Specification for the assessment of the life cycle greenhouse gas emissions of  
4060 goods and services. London, British Standards Institution.
- 4061 BSI (2012). PAS 2050-1:2012. Assessment of life cycle greenhouse gas emissions from horticultural  
4062 products - Supplementary requirements for the cradle to gate stages of GHG assessments of horticultural  
4063 products undertaken in accordance with PAS 2050. London, British Standards Institution.
- 4064 CEPI (2008). European Recovered Paper Identification System.
- 4065 Decision 529/2013/EU. European Parliament and the Council: "Decision No 529/2013/EU of the European  
4066 Parliament and of the Council of 21 May 2013 on accounting rules on greenhouse gas emissions and  
4067 removals resulting from activities relating to land use, land-use change and forestry and on information  
4068 concerning actions relating to those activities." *Official Journal of the European Union*: L 165/180 - 197.
- 4069 Deloitte (2014). Trippage rates and transportation distances in the beverage industry. Commissioned by  
4070 the Federation of German Food and Drink Industries and the Association of German Retailers.
- 4071 Dreicer, M., Tort, V., Manen, P. (1995). *ExternE, Externalities of Energy, Vol. 5 Nuclear, Centr d'étude sur*  
4072 *l'Evaluation de la Protection dans le domaine nucléaire (CEPN)*, edited by the European Commission DGXII,  
4073 Science, Research and development JOULE, Luxembourg.
- 4074 EC-JRC, (2017a). Environmental footprint characterisation factors. Available at  
4075 <http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>
- 4076 EC-JRC, (2017b). Life cycle impact assessment methods and characterisation factors for Environmental  
4077 Footprint. Technical details on the characterisation factors implementation. JRC technical report,  
4078 forthcoming

4079 EN standard (2007). 15343:2007: Plastics — Recycled Plastics — Plastics recycling traceability and  
4080 assessment of conformity and recycled content.

4081 European Commission - Joint Research Centre - Institute for Environment and Sustainability (2010-2016).  
4082 "International Reference Life Cycle Data System (ILCD) handbook." Retrieved 17 Oct 2016, 2016, from  
4083 [http://eplca.jrc.ec.europa.eu/?page\\_id=140](http://eplca.jrc.ec.europa.eu/?page_id=140). ILCD

4084 European Commission (2012). Regulation no 1179/2012: Establishing criteria determining when glass cullet  
4085 ceases to be waste under Directive 2008/98/EC of the European Parliament and of the Council.

4086 European Commission (2013). "Annex II: Product Environmental Footprint (PEF) Guide in Commission  
4087 Recommendation of 9 April 2013 on the use of common methods to measure and communicate the life  
4088 cycle environmental performance of products and organisations (2013/179/EU)." Official Journal of the  
4089 European Union 56(L 124): 6-106.

4090 Fantke, P., Evans, J., Hodas, N., Apte, J., Jantunen, M., Jolliet, O., McKone, T.E. (2016). Health impacts of  
4091 fine particulate matter. In: Frischknecht, R., Jolliet, O. (Eds.), Global Guidance for Life Cycle Impact  
4092 Assessment Indicators: Volume 1. UNEP/SETAC Life Cycle Initiative, Paris, pp. 76-99. Retrieved Jan 2017  
4093 from [www.lifecycleinitiative.org/applying-lca/lcia-cf/](http://www.lifecycleinitiative.org/applying-lca/lcia-cf/).

4094 Frischknecht, R., Braunschweig, A., Hofstetter P., Suter P. (2000), Modelling human health effects of  
4095 radioactive releases in Life Cycle Impact Assessment. Environmental Impact Assessment Review, 20 (2) pp.  
4096 159-189.

4097 Guinée, J.B. (Ed.), Gorrée, M., Heijungs, R., Huppes, G., Kleijn, R., de Koning, A., Van Oers, L., Wegener  
4098 Sleeswijk, A., Suh, S., Udo de Haes, H.A, De Bruijn, J.A., Van Duin R., Huijbregts, M.A.J. (2002). Handbook  
4099 on Life Cycle Assessment: Operational Guide to the ISO Standards. Series: Eco-efficiency in industry and  
4100 science. Kluwer Academic Publishers. Dordrecht (Hardbound, ISBN 1-4020-0228-9; Paperback, ISBN 1-  
4101 4020-0557-1).

4102 IPCC (2013). IPCC Climate Change Fifth Assessment Report: Climate Change 2013.  
4103 <http://www.ipcc.ch/ipccreports/assessments-reports.htm>

4104 IPCC (2006). Guidelines for National Greenhouse Gas Inventories.

4105 IPCC (2007). Forster, P., V. Ramaswamy, P. Artaxo, T. Berntsen, R. Betts, D.W. Fahey, J. Haywood, J. Lean,  
4106 D.C. Lowe, G. Myhre, J. Nganga, R. Prinn, G. Raga, M. Schulz and R. Van Dorland, 2007: Changes in  
4107 Atmospheric Constituents and in Radiative Forcing. In: Climate Change 2007: The Physical Science Basis.  
4108 Contribution of Working Group I to the Fourth Assessment Report of the Intergovernmental Panel on  
4109 Climate Change [Solomon, S., D. Qin, M. Manning, Z. Chen, M. Marquis, K.B. Averyt, M. Tignor and H.L.  
4110 Miller (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA.

4111 IPCC (2013). Myhre, G., D. Shindell, F.-M. Bréon, W. Collins, J. Fuglestedt, J. Huang, D. Koch, J.-F.  
4112 Lamarque, D. Lee, B. Mendoza, T. Nakajima, A. Robock, G. Stephens, T. Takemura and H. Zhang, 2013:  
4113 Anthropogenic and Natural Radiative Forcing. In: Climate Change 2013: The Physical Science Basis.

4114 Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate  
4115 Change [Stocker, T.F., D. Qin, G.-K. Plattner, M. Tignor, S.K. Allen, J. Boschung, A. Nauels, Y. Xia, V. Bex and  
4116 P.M. Midgley (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA.

4117 Nederlands Instituut voor Bouwbiologie en Ecologie (2014). Vergelijkend LCA onderzoek houten en  
4118 kunststof pallets.

4119 Palandre et al. (2003). Estimation of the world-wide fleets of refrigerating and air-conditioning equipment  
4120 in order to determine forecasts of refrigerant emissions.

4121 PERIFEM and ADEME “Guide sectorial 2014: Réalisation d’un bilan des émissions de gaz à effet de serre  
4122 pour distribution et commerce de détail”.

4123 Posch, M., Seppälä, J., Hettelingh, J.P., Johansson, M., Margni M., Jolliet, O. (2008). The role of atmospheric  
4124 dispersion models and ecosystem sensitivity in the determination of characterisation factors for acidifying  
4125 and eutrophying emissions in LCIA. *International Journal of Life Cycle Assessment* (13) pp.477–486

4126 Rosenbaum, R.K., Anton, A., Bengoa, X. et al. 2015. The Glasgow consensus on the delineation between  
4127 pesticide emission inventory and impact assessment for LCA. *International Journal of Life Cycle  
4128 Assessment*, 20: 765).

4129 Rosenbaum, R.K., Bachmann, T.M., Gold, L.S., Huijbregts, M.A.J., Jolliet, O., Juraske, R., Köhler, A., Larsen,  
4130 H.F., MacLeod, M., Margni, M., McKone, T.E., Payet, J., Schuhmacher, M., van de Meent, D., Hauschild, M.Z.  
4131 (2008): USEtox - The UNEPSETAC toxicity model: recommended characterisation factors for human toxicity  
4132 and freshwater ecotoxicity in Life Cycle Impact Assessment. *International Journal of Life Cycle Assessment*,  
4133 13(7): 532-546, 2008

4134 Seppälä, J., Posch, M., Johansson, M., Hettelingh, J.P. (2006). Country-dependent Characterisation Factors  
4135 for Acidification and Terrestrial Eutrophication Based on Accumulated Exceedance as an Impact Category  
4136 Indicator. *International Journal of Life Cycle Assessment* 11(6): 403-416

4137 Struijs, J., Beusen, A., van Jaarsveld, H. and Huijbregts, M.A.J. (2009). Aquatic Eutrophication. Chapter 6 in:  
4138 Goedkoop, M., Heijungs, R., Huijbregts, M.A.J., De Schryver, A., Struijs, J., Van Zelm, R. (2009). ReCiPe 2008  
4139 A life cycle impact assessment method which comprises harmonised category indicators at the midpoint  
4140 and the endpoint level. Report I: Characterisation factors, first edition.

4141 Tassou, S.A., De-Lille, G., and Ge, Y.T. (2009). Food transport refrigeration – Approaches to reduce energy  
4142 consumption and environmental impacts of road transport. *Applied Thermal Engineering*, 29, 1467-1477.

4143 UNEP (2016) Global guidance for life cycle impact assessment indicators. Volume 1. ISBN: 978-92-807-  
4144 3630-4. Available at: [http://www.lifecycleinitiative.org/life-cycle-impact-assessment-indicators-and-  
4145 characterization-factors/](http://www.lifecycleinitiative.org/life-cycle-impact-assessment-indicators-and-characterization-factors/)

4146 van Oers L, de Koning A, Guinee JB, Huppes G (2002). Abiotic Resource Depletion in LCA. Road and  
4147 Hydraulic Engineering Institute, Ministry of Transport and Water, Amsterdam

- 4148 Van Zelm, R., Huijbregts, M.A.J., Den Hollander, H.A., Van Jaarsveld, H.A., Sauter, F.J., Struijs, J., Van  
4149 Wijnen, H.J., Van de Meent, D. (2008). European characterization factors for human health damage of  
4150 PM10 and ozone in life cycle impact assessment. *Atmospheric Environment* 42, 441-453
- 4151 WMO (1999). *Scientific Assessment of Ozone Depletion: 1998*. Global Ozone Research and Monitoring  
4152 Project - Report No. 44, ISBN 92-807-1722-7, Geneva
- 4153
- 4154

4155 **Annex A – List of EF impact categories,**  
 4156 **normalisation and weighting factors**

4157  
 4158 **List of recommended models at midpoint, together with their indicator,**  
 4159 **unit and source. In red text: the differences compared to the PEF guide**  
 4160 **(2013)**

Recommendation at midpoint					
Impact category	Indicator	Unit	Recommended default LCIA method	Source of CFs	Robustness
<b>Climate change<sup>83</sup></b>	Radiative forcing as Global Warming Potential (GWP100)	kg CO <sub>2</sub> eq	Baseline model of 100 years of the IPCC (based on IPCC 2013)	EC-JRC, 2017 <sup>84</sup>	I
<b>Ozone depletion</b>	Ozone Depletion Potential (ODP)	kg CFC-11 eq	Steady-state ODPs as in (WMO 1999)	EC-JRC, 2017	I
<b>Human toxicity, cancer*</b>	Comparative Toxic Unit for humans (CTU <sub>h</sub> )	CTUh	USEtox model (Rosenbaum et al, 2008)	EC-JRC, 2017	III/interim
<b>Human toxicity, non- cancer*</b>	Comparative Toxic Unit for humans (CTU <sub>h</sub> )	CTUh	USEtox model (Rosenbaum et al, 2008)	EC-JRC, 2017	III/interim
<b>Particulate matter</b>	Impact on human health	disease incidence	PM method recommended by UNEP (UNEP 2016)	EC-JRC, 2017	I
<b>Ionising radiation, human health</b>	Human exposure efficiency relative to U <sup>235</sup>	kBq U <sup>235</sup> eq	Human health effect model as developed by Dreicer et al. 1995 (Frischknecht et al, 2000)	EC-JRC, 2017	II
<b>Photochemical ozone formation,</b>	Tropospheric ozone concentration increase	kg NMVOC eq	LOTOS-EUROS model (Van	EC-JRC, 2017	II

<sup>83</sup> Three additional sub-indicators may be requested for reporting, depending on the PEFCR. The sub-indicators are further described in section 7.9.

<sup>84</sup> The full list of characterization factors (EC-JRC, 2017a) is available at this link <http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>

Recommendation at midpoint					
Impact category	Indicator	Unit	Recommended default LCIA method	Source of CFs	Robustness
human health			Zelm et al, 2008) as implemented in ReCiPe 2008		
<b>Acidification</b>	Accumulated Exceedance (AE)	mol H <sup>+</sup> <sub>eq</sub>	Accumulated Exceedance (Seppälä et al. 2006, Posch et al, 2008)	EC-JRC, 2017	II
<b>Eutrophication, terrestrial</b>	Accumulated Exceedance (AE)	mol N <sub>eq</sub>	Accumulated Exceedance (Seppälä et al. 2006, Posch et al, 2008)	EC-JRC, 2017	II
<b>Eutrophication, freshwater</b>	Fraction of nutrients reaching freshwater end compartment (P)	fresh water: kg P <sub>eq</sub>	EUTREND model (Struijs et al, 2009) as implemented in ReCiPe	EC-JRC, 2017	II
<b>Eutrophication, marine</b>	Fraction of nutrients reaching marine end compartment (N)	fresh water: kg N <sub>eq</sub>	EUTREND model (Struijs et al, 2009) as implemented in ReCiPe	EC-JRC, 2017	II
<b>Ecotoxicity, freshwater*</b>	Comparative Toxic Unit for ecosystems (CTU <sub>e</sub> )	CTU <sub>e</sub>	USEtox model, (Rosenbaum et al, 2008)	EC-JRC, 2017	III/interim
<b>Land use</b>	<ul style="list-style-type: none"> <li>• Soil quality index<sup>85</sup></li> <li>• Biotic production</li> <li>• Erosion resistance</li> <li>• Mechanical filtration</li> <li>• Groundwater replenishment</li> </ul>	<ul style="list-style-type: none"> <li>• Dimensionless (pt)</li> <li>• kg biotic production</li> <li>• kg soil</li> <li>• m<sup>3</sup> water</li> <li>• m<sup>3</sup> groundwater/</li> </ul>	<ul style="list-style-type: none"> <li>• Soil quality index based on LANCA (Beck et al. 2010 and Bos et al. 2016)</li> </ul>	EC-JRC, 2017	III
<b>Water use<sup>#</sup></b>	User deprivation potential (deprivation-weighted water consumption)	m <sup>3</sup> world <sub>eq</sub>	Available WATER REMaining (AWARE) as recommended by UNEP, 2016	EC-JRC, 2017	III
<b>Resource use, minerals and</b>	Abiotic resource depletion (ADP ultimate reserves)	kg Sb <sub>eq</sub>	CML 2002 (Guinée et al.,		III

<sup>85</sup> This index is the result of the aggregation, performed by JRC, of the 4 indicators provided by LANCA model as indicators for land use



Recommendation at midpoint					
Impact category	Indicator	Unit	Recommended default LCIA method	Source of CFs	Robustness
metals			2002) and van Oers et al. 2002.		
Resource use, fossils	Abiotic resource depletion – fossil fuels (ADP-fossil) <sup>86</sup>	MJ	CML 2002 (Guinée et al., 2002) and van Oers et al. 2002	EC-JRC, 2017	III

4161 \*Long-term emissions (occurring beyond 100 years) are excluded from the toxic impact categories. Toxicity emissions  
4162 to this sub-compartment have a characterisation factor set to 0 in the EF LCIA (to ensure consistency). If included by  
4163 the applicant in the LCI modelling, the sub-compartment 'unspecified (long-term)' shall be used.

4164 #The results for water use might be overestimated and shall therefore be interpreted with caution. Some of  
4165 the EF datasets tendered during the pilot phase and used in this PEFCR/OEFSR include inconsistencies in the  
4166 regionalization and elementary flow implementations. This problem has nothing to do with the impact  
4167 assessment method or the implementability of EF methods, but occurred during the technical development  
4168 of some of the datasets. The PEFCR/OEFSR remains valid and usable. The affected EF datasets will be  
4169 corrected by mid-2019. At that time it will be possible to review this PEFCR/OEFSR accordingly, if seen  
4170 necessary.

4171 The full list of characterization factors (EC-JRC, 2017a) is available at this link  
4172 <http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>

4173

## 4174 Global normalisation factors for Environmental Footprint

Impact category	Model	Unit	global NFs for PEF	Person NF for PEF	Robustness of ILCD for the PEF impact assessment	Inventory coverage completeness	Inventory robustness	Comment
Climate change	IPCC, 2013	kg CO <sub>2</sub> eq	5.35E+13	7.76E+03	I	II	I	
Ozone depletion	World Meteorological Organisation (WMO), 1999	kg CFC-11 eq	1.61E+08	2.34E-02	I	III	II	

<sup>86</sup> In the ILCD flow list, and for the current recommendation, Uranium is included in the list of energy carriers, and it is measured in MJ.

<b>Human toxicity, cancer</b>	USEtox (Rosenbaum et al., 2008)	CTUh	2.66E+05	3.85E-05	II/III	III	III	
<b>Human toxicity, non-cancer</b>	USEtox (Rosenbaum et al., 2008)	CTUh	3.27E+06	4.75E-04	II/III	III	III	
<b>Particulate matter</b>	UNEP, 2016	Disease incidence	4.39E+06	6.37E-04	I	I/II	I /II	NF calculation takes into account the emission height both in the emission inventory and in the impact assessment.
<b>Ionising radiation, human health</b>	Frischknecht et al., 2000	kBq U <sup>235</sup> -eq	2.91E+13	4.22E+03	II	II	III	
<b>Photochemical ozone formation, human health</b>	Van Zelm et al., 2008, as applied in ReCiPe, 2008	kg NMVOC eq	2.80E+11	4.06E+01	II	III	I/II	
<b>Acidification</b>	Posch et al., 2008	mol H <sup>+</sup> eq	3.83E+11	5.55E+01	II	II	I/II	
<b>Eutrophication, terrestrial</b>	Posch et al., 2008	mol N eq	1.22E+12	1.77E+02	II	II	I/II	
<b>Eutrophication, freshwater</b>	Struijs et al., 2009	kg P eq	1.76E+10	2.55E+00	II	II	III	
<b>Eutrophication, marine</b>	Struijs et al., 2009	kg N eq	1.95E+11	2.83E+01	II	II	II/III	
<b>Land use</b>	Bos et al., 2016 (based on)	pt	9.20E+15	1.33E+06	III	II	I I	The NF is built by means of regionalised CFs.
<b>Ecotoxicity, freshwater</b>	USEtox (Rosenbaum et al., 2008)	CTUe	8.15E+13	1.18E+04	II/III	III	III	
<b>Water use</b>	AWARE 100 (based on; UNEP, 2016)	m <sup>3</sup> world eq	7.91E+13	1.15E+04	III	I	II	The NF is built by means of regionalise

								d CFs.
<b>Resource use, fossils</b>	ADP fossils (van Oers et al., 2002)	MJ	4.50E+14	6.53E+04	III			
<b>Resource use, minerals and metals</b>	ADP ultimate reserve (van Oers et al., 2002)	kg Sb <sub>eq</sub>	3.99E+08	5.79E-02	III	I	II	

4175

4176 **Weighting factors for Environmental Footprint**

	Aggregated weighting set	Robustness factors	Calculation	Final weighting factors
<b>WITH TOX CATEGORIES (not applied in pilot phase)</b>	(50:50)	(scale 1-0.1)		
	A	B	C=A*B	C scaled to 100
Climate change	12.9	0.87	11.18	<b>21.06</b>
Ozone depletion	5.58	0.6	3.35	<b>6.31</b>
Human toxicity, cancer	6.8	0.17	1.13	<b>2.13</b>
Human toxicity, non-cancer	5.88	0.17	0.98	<b>1.84</b>
Particulate matter	5.49	0.87	4.76	<b>8.96</b>
Ionizing radiation, human health	5.7	0.47	2.66	<b>5.01</b>
Photochemical ozone formation, human health	4.76	0.53	2.54	<b>4.78</b>
Acidification	4.94	0.67	3.29	<b>6.2</b>
Eutrophication, terrestrial	2.95	0.67	1.97	<b>3.71</b>
Eutrophication, freshwater	3.19	0.47	1.49	<b>2.8</b>
Eutrophication, marine	2.94	0.53	1.57	<b>2.96</b>
Ecotoxicity, freshwater	6.12	0.17	1.02	<b>1.92</b>
Land use	9.04	0.47	4.22	<b>7.94</b>
Water use	9.69	0.47	4.52	<b>8.51</b>
Resource use, minerals and metals	6.68	0.6	4.01	<b>7.55</b>
Resource use, fossils	7.37	0.6	4.42	<b>8.32</b>

	Aggregated weighting set	Robustness factors	Calculation	Final weighting factors
<b>WITHOUT TOX CATEGORIES (applied in the pilot phase)</b>	(50:50)	(scale 1-0.1)		
	A	B	C=A*B	C scaled to 100
Climate change	15.75	0.87	13.65	<b>22.19</b>
Ozone depletion	6.92	0.6	4.15	<b>6.75</b>

Particulate matter	6.77	0.87	5.87	<b>9.54</b>
Ionizing radiation, human health	7.07	0.47	3.3	<b>5.37</b>
Photochemical ozone formation, human health	5.88	0.53	3.14	<b>5.1</b>
Acidification	6.13	0.67	4.08	<b>6.64</b>
Eutrophication, terrestrial	3.61	0.67	2.4	<b>3.91</b>
Eutrophication, freshwater	3.88	0.47	1.81	<b>2.95</b>
Eutrophication, marine	3.59	0.53	1.92	<b>3.12</b>
Land use	11.1	0.47	5.18	<b>8.42</b>
Water use	11.89	0.47	5.55	<b>9.03</b>
Resource use, minerals and metals	8.28	0.6	4.97	<b>8.08</b>
Resource use, fossils	9.14	0.6	5.48	<b>8.92</b>

4177

4178

## Annex B - PEFCR TEMPLATE

4179

4180

**Note:** the text included in *italics* in each section shall not be modified when drafting the PEFCR, except for references to tables, figures and equations. References shall be revised and linked correctly. Further text may be added if relevant.

4181

4182

4183

The text included in [] are instructions for the PEFCR developers.

4184

**The order of sections and their titles shall not be modified.**

4185

4186

[The first page shall include at least the following information:

4187

- The product category for which the PEFCR is valid

4188

- Version number

4189

- Date of publication

4190

- Time validity (31<sup>st</sup> December 2020)]

4191

4192

4193 **Table of contents**

4194

4195 **Acronyms**

4196 [List in this section all the acronyms used in the PEFCR. Those already included in the latest version of the  
4197 PEF Guide or the PEFCR Guidance shall be copied in their original form. The acronyms shall be provided in  
4198 alphabetical order.]

4199

4200 **Definitions**

4201 [List in this section all the definitions that are relevant for the PEFCR. Those already included in the latest  
4202 version of the PEF Guide or the PEFCR Guidance shall be copied in their original form. The definitions shall  
4203 be provided in alphabetical order.]

4204

4205 **B.1 Introduction**

4206 *The Product Environmental Footprint (PEF) Guide provides detailed and comprehensive technical guidance*  
4207 *on how to conduct a PEF study. PEF studies may be used for a variety of purposes, including in-house*  
4208 *management and participation in voluntary or mandatory programmes.*

4209 *For all requirements not specified in this PEFCR the applicant shall refer to the documents this PEFCR is in*  
4210 *conformance with (see chapter B.2.7).*

4211 *The compliance with the present PEFCR is optional for PEF in-house applications, whilst it is mandatory*  
4212 *whenever the results of a PEF study or any of its content is intended to be communicated.*

4213

4214 **Terminology: shall, should and may**

4215 *This PEFCR uses precise terminology to indicate the requirements, the recommendations and options that*  
4216 *could be chosen when a PEF study is conducted.*

4217 

- *The term “shall” is used to indicate what is required in order for a PEF study to be in conformance*  
4218 *with this PEFCR.*

4219 

- *The term “should” is used to indicate a recommendation rather than a requirement. Any deviation*  
4220 *from a “should” requirement has to be justified when developing the PEF study and made*  
4221 *transparent.*

4222 

- *The term “may” is used to indicate an option that is permissible. Whenever options are available,*  
4223 *the PEF study shall include adequate argumentation to justify the chosen option.*

4224

4225 **B.2 General information about the PEFCR**

4226 **B.2.1 Technical secretariat**

4227 [The list of the organizations in the TS at the time of final vote shall be provided. For each one, the type of  
4228 organization shall be reported (industry, academia, NGO, consultant, etc), as well as the starting date of  
4229 participation. The TS may decide to include also the names of the members of the persons involved for  
4230 each organization]

<i>Name of the organization</i>	<i>Type of organization</i>	<i>Name of the members (not mandatory)</i>

4231

4232 **B.2.2 Consultations and stakeholders**

4233 [For each public consultation the following information shall be provided:

- 4234 - Opening and closing date of the public consultation
- 4235 - Number of comments received
- 4236 - Names of organizations that have provided comments
- 4237 - Link to the wiki page]

4238

4239 **B.2.3 Review panel and review requirements of the PEFCR**

4240 [This section shall include the names and affiliations of the members of the review panel. The member that  
4241 is chairing the review panel shall be identified.]

<i>Name of the member</i>	<i>Affiliation</i>	<i>Role</i>

<b>Name of the member</b>	<b>Affiliation</b>	<b>Role</b>

4242

4243 *The reviewers have verified that the following requirements have been fulfilled:*

- 4244 ● *The PEFCR has been developed in accordance with the requirement provided in the PEFCR Guidance*  
4245 *[indicate the version the PEFCR is in conformance with], and where appropriate in accordance with*  
4246 *the requirements provided in the most recent approved version of the PEF Guide, and supports*  
4247 *creation of credible and consistent PEF profiles,*
- 4248 ● *The functional unit, allocation and calculation rules are adequate for the product category under*  
4249 *consideration,*
- 4250 ● *Company-specific and secondary datasets used to develop this PEFCR are relevant, representative,*  
4251 *and reliable,*
- 4252 ● *The selected LCIA indicators and additional environmental information are appropriate for the*  
4253 *product category under consideration and the selection is done in accordance with the guidelines*  
4254 *stated in the PEFCR Guidance version [indicate the version the PEFCR is in conformance with] and*  
4255 *the most recent approved version of the PEF Guide,*
- 4256 ● *The benchmark(s) is(are) correctly defined, and*
- 4257 ● *Both LCA-based data and the additional environmental information prescribed by the PEFCR give a*  
4258 *description of the significant environmental aspects associated with the product.*

4259 [The TS may add additional review criteria as appropriate]

4260

4261 *The detailed review report is provided in Annex 3 of this PEFCR.*

4262

4263 **B.2.4 Review statement**

4264 *This PEFCR has been developed in compliance with Version [indicate the version the PEFCR is in*  
4265 *conformance with] of the PEFCR Guidance, and with the PEF Guide adopted by the Commission on [indicate*  
4266 *the date of approval of the latest version available].*

4267 *The representative product(s) correctly describe the average product(s) sold in Europe for the product group*  
4268 *in scope of this PEFCR.*

4269 *PEF studies carried out in compliance with this PEFCR would reasonably lead to reproducible results and the*  
4270 *information included therein may be used to make comparisons and comparative assertions under the*  
4271 *prescribed conditions (see chapter on limitations). [the last part of this statement shall be deleted in case*  
4272 *the PEFCR is for intermediate product(s)].*

4273 [The review statement shall be completed by the reviewer.]

4274 **B.2.5 Geographic validity**

4275 *This PEFCR is valid for products in scope sold/consumed in the European Union + EFTA.*

4276 *Each PEF study shall identify its geographical validity listing all the countries where the product object of the*  
4277 *PEF study is consumed/sold with the relative market share. In case the information on the market for the*  
4278 *specific product object of the study is not available, Europe +EFTA shall be considered as the default market.*

4279 **B.2.6 Language**

4280 *The PEFCR is written in English. The original in English supersedes translated versions in case of conflicts.*

4281 **B.2.7 Conformance to other documents**

4282 *This PEFCR has been prepared in conformance with the following documents (in prevailing order):*

4283 *PEFCR Guidance [add the version of the Guidance the PEFCR is in conformance with]”*

4284 *Product Environmental Footprint (PEF) Guide; Annex II to the Recommendation 2013/179/EU, 9 April 2013.*  
4285 *Published in the official journal of the European Union Volume 56, 4 May 2013*

4286 [The PEFCR shall list additional documents, if any, with which the PEFCR is in conformance with.]

4287 **B.3 PEFCR scope**

4288 [This section shall include a description of the scope of the PEFCR and shall clearly list the number of sub-  
4289 categories (if any) included in the scope of the PEFCR]

4290 **B.3.1 Product classification**

4291 *The CPA codes for the products included in this PEFCR are:*

4292 [Based on the product category, provide the corresponding Classification of Products by Activity (CPA)  
4293 (minimum two-digit, based on the latest CPA list version available). Where multiple production routes for  
4294 similar products are defined using alternative CPAs, the PEFCR shall accommodate all such CPAs. Identify  
4295 the sub-categories not covered by the CPA, if any]

4296 **B.3.2 Representative product(s)**

4297 [The PEFCR shall include a description of the representative product(s) and how it has been derived].

4298 *The screening study is available upon request to the TS coordinator that has the responsibility of distributing*  
4299 *it with an adequate disclaimer about its limitations.*



4300 **B.3.3 Functional unit and reference flow**

4301 *The FU is ... [to be filled in]. Table B. 1 defines the key aspects used to define the FU.*

4302

4303 **Table B. 1. Key aspects of the FU**

<i>What?</i>	[to be filled in. Note that in case the PEFCR uses the term 'inedible parts' a definition shall be provided by the TS]
<i>How much?</i>	[to be filled in]
<i>How well?</i>	[For food products only, it might include the following statement: <i>This aspect could not be incorporated so far. This limitation is recognized and requires further developments in order to improve fair comparisons.</i> ] [for non-food product: describe how well, if possible.]
<i>How long?</i>	[to be filled in]

4304

4305

4306 *The reference flow is the amount of product needed to fulfil the defined function and shall be measured in ...*  
 4307 *[fill in the units]. All quantitative input and output data collected in the study shall be calculated in relation*  
 4308 *to this reference flow.*

4309 [The PEFCR shall describe how the appropriate reference flow shall be determined/calculated. In case  
 4310 calculation parameters are needed, the PEFCR shall provide default values or shall request these  
 4311 parameters in the list of mandatory company-specific information. A calculation example shall be  
 4312 provided.]

4313

4314 **B.3.4 System boundary**

4315 [This section shall include a system diagram clearly indicating the processes and life cycle stages that are  
 4316 included in the product system. The diagram shall include an indication of the processes for which  
 4317 company-specific data are required.]

4318 *The following life cycle stages and processes shall be included in the system boundary:*

4319 **Table B. 2. Life cycle stages**

<i>Life cycle stage</i>	<i>Short description of the processes included</i>

- 4320
- 4321 According to this PEFCR, the following processes may be excluded based on the cut-off rule: [include the list  
4322 of processes that shall be excluded based on the cut off rule] OR According to this PEFCR, no cut-off is  
4323 applicable.
- 4324 Each PEF study done in accordance with this PEFCR shall provide in the PEF study a diagram indicating the  
4325 organizational boundary, to highlight those activities under the control of the organization and those falling  
4326 into Situation 1, 2 or 3 of the data need matrix.

### B.3.5 EF impact assessment

- 4327
- 4328 Each PEF study carried out in compliance with this PEFCR shall calculate the PEF-profile including all PEF  
4329 impact categories listed in the Table below. [The TS shall indicate in the table if the sub-categories for  
4330 climate change shall be calculated separately.

4331 **Table B. 3. List of the impact categories to be used to calculate the PEF profile**

<i>Impact category</i>	<i>Indicator</i>	<i>Unit</i>	<i>Recommended default LCIA method</i>
<i>Climate change</i>	<i>Radiative forcing as Global Warming Potential (GWP100)</i>	<i>kg CO<sub>2</sub> eq</i>	<i>Baseline model of 100 years of the IPCC (based on IPCC 2013)</i>
<i>- Climate change-biogenic</i> [strikethrough if not to be reported upon]			
<i>- Climate change – land use and land transformation</i> [strikethrough if not to be reported upon]			
<i>Ozone depletion</i>	<i>Ozone Depletion Potential (ODP)</i>	<i>kg CFC-11 eq</i>	<i>Steady-state ODPs 1999 as in WMO assessment</i>

<b>Impact category</b>	<b>Indicator</b>	<b>Unit</b>	<b>Recommended default LCIA method</b>
Human toxicity, cancer*	Comparative Toxic Unit for humans (CTU <sub>h</sub> )	CTUh	USEtox model (Rosenbaum et al, 2008)
Human toxicity, non-cancer*	Comparative Toxic Unit for humans (CTU <sub>h</sub> )	CTUh	USEtox model (Rosenbaum et al, 2008)
<i>Particulate matter</i>	<i>Impact on human health</i>	<i>disease incidence</i>	<i>UNEP recommended model (Fantke et al 2016)</i>
Ionising radiation, human health	Human exposure efficiency relative to U <sup>235</sup>	kBq U <sup>235</sup> eq	Human health effect model as developed by Dreicer et al. 1995 (Frischknecht et al, 2000)
Photochemical ozone formation, human health	Tropospheric ozone concentration increase	kg NMVOC eq	LOTOS-EUROS model (Van Zelm et al, 2008) as implemented in ReCiPe
Acidification	Accumulated Exceedance (AE)	mol H <sup>+</sup> eq	Accumulated Exceedance (Seppälä et al. 2006, Posch et al, 2008)
Eutrophication, terrestrial	Accumulated Exceedance (AE)	mol N eq	Accumulated Exceedance (Seppälä et al. 2006, Posch et al, 2008)
Eutrophication, freshwater	Fraction of nutrients reaching freshwater end compartment (P)	kg P eq	EUTREND model (Struijs et al, 2009b) as implemented in ReCiPe
Eutrophication, marine	Fraction of nutrients reaching marine end compartment (N)	kg N eq	EUTREND model (Struijs et al, 2009b) as implemented in ReCiPe
Ecotoxicity, freshwater*	Comparative Toxic Unit for ecosystems (CTU <sub>e</sub> )	CTUe	USEtox model, (Rosenbaum et al, 2008)
<i>Land use</i>	<ul style="list-style-type: none"> <li>• <i>Soil quality index<sup>87</sup></i></li> <li>• <i>Biotic production</i></li> <li>• <i>Erosion resistance</i></li> <li>• <i>Mechanical filtration</i></li> <li>• <i>Groundwater replenishment</i></li> </ul>	<ul style="list-style-type: none"> <li>• <i>Dimensionless (pt)</i></li> <li>• <i>kg biotic production<sup>88</sup></i></li> <li>• <i>kg soil</i></li> <li>• <i>m<sup>3</sup> water</i></li> <li>• <i>m<sup>3</sup> groundwater</i></li> </ul>	<ul style="list-style-type: none"> <li>• <i>Soil quality index based on LANCA (EC-JRC)<sup>89</sup></i></li> <li>• <i>LANCA (Beck et al. 2010)</i></li> <li>• <i>LANCA (Beck et al. 2010)</i></li> <li>• <i>LANCA (Beck et al. 2010)</i></li> <li>• <i>LANCA (Beck et al. 2010)</i></li> </ul>
<i>Water use<sup>#</sup></i>	<i>User deprivation potential (deprivation-weighted water consumption)</i>	<i>m<sup>3</sup> world eq</i>	<i>Available WAtER REMaining (AWARE) Boulay et al., 2016</i>
<i>Resource use, minerals and metals</i>	<i>Abiotic resource depletion (ADP ultimate reserves)</i>	<i>kg Sb eq</i>	<i>CML 2002 (Guinée et al., 2002) and van Oers et al. 2002.</i>
<i>Resource use, fossils</i>	<i>Abiotic resource depletion – fossil fuels (ADP-fossil)</i>	<i>MJ</i>	<i>CML 2002 (Guinée et al., 2002) and van Oers et al. 2002</i>

4332 \*Long-term emissions (occurring beyond 100 years) shall be excluded from the toxic impact categories. Toxicity  
4333 emissions to this sub-compartment have a characterisation factor set to 0 in the EF LCIA (to ensure consistency). If  
4334 included by the applicant in the LCI modelling, the sub-compartment 'unspecified (long-term)' shall be used.

<sup>87</sup> This index is the result of the aggregation, performed by JRC, of the 4 indicators provided by LANCA model as indicators for land use

<sup>88</sup> This refers to occupation. In case of transformation the LANCA indicators are without the year (a)

<sup>89</sup> Forthcoming document on the update of the recommended Impact Assessment methods and factors for the EF

4335 *#The results for water use might be overestimated and shall therefore be interpreted with caution. Some of*  
4336 *the EF datasets tendered during the pilot phase and used in this PEFCR/OEFSR include inconsistencies in the*  
4337 *regionalization and elementary flow implementations. This problem has nothing to do with the impact*  
4338 *assessment method or the implementability of EF methods, but occurred during the technical development*  
4339 *of some of the datasets. The PEFCR/OEFSR remains valid and usable. The affected EF datasets will be*  
4340 *corrected by mid-2019. At that time it will be possible to review this PEFCR/OEFSR accordingly, if seen*  
4341 *necessary.*

4342 The full list of normalization factors and weighting factors are available in Annex 1 - List of EF normalisation  
4343 factors and weighting factors.

4344 The full list of characterization factors (EC-JRC, 2017a) is available at this link  
4345 <http://eplca.jrc.ec.europa.eu/LCDN/developer.xhtml>

4346

### 4347 **B.3.6 Limitations**

4348 [This section shall include the list of limitations a PEF study will have even if carried out in accordance with  
4349 this PEFCR. It shall also include the conditions under which a comparison or comparative assertion may be  
4350 made].

## 4351 **B.4 Most relevant impact categories, life cycle stages and processes**

4352 [In case the PEFCR has no sub-categories] *The most relevant impact categories for the product group in*  
4353 *scope of this PEFCR are the following:*

4354 [In case the PEFCR has multiple sub-categories, per sub-category] *The most relevant impact categories for*  
4355 *the sub-category [name] in scope of this PEFCR are the following:*

- 4356 • [list the most relevant impact categories per sub-category if appropriate. If climate change  
4357 is selected as a relevant impact category, the PEFCR shall (i) always request to report the  
4358 total climate change as the sum of the three sub-indicators, and (ii) for the sub-indicators  
4359 'Climate change - biogenic' and 'Climate change - land use and land transformation',  
4360 request separate reporting for those contributing more than 5% each to the total score. A  
4361 footnote shall be added, explaining why or why not the two sub-indicators shall be (i) or  
4362 not be (ii) reported separately:]

4363 *(i)The sub-indicators 'Climate change - biogenic' and 'Climate change - land use and land*  
4364 *transformation' shall be reported separately because their contribution to the total climate*  
4365 *change impact, based on the benchmark results, is more than 5% each.*

4366 *(ii)The sub-indicators 'Climate change - biogenic' and 'Climate change - land use and land*  
4367 *transformation' shall not be reported separately because their contribution to the total climate*  
4368 *change impact, based on the benchmark results, is less than 5% each.*

4369 [In case the PEFCR has no sub-categories] *The most relevant life cycle stages for the product group in scope*  
 4370 *of this PEFCR are the following:*

4371 [In case the PEFCR has multiple sub-categories] *The most relevant life cycle stages for the sub-category*  
 4372 *[name] in scope of this PEFCR are the following:*

- 4373 • [list the most relevant life cycle stages per sub-category]

4374 *The most relevant processes for the product group in scope of this PEFCR are the following* [this Table shall  
 4375 be filled in based on the final results of the representative product(s). Provide one table per sub-category,  
 4376 if appropriate.]

4377 **Table B. 4. List of the most relevant processes**

<i>Impact category</i>	<i>Processes</i>
Most relevant impact category 1	· Process A (from life cycle stage X)
	· Process B (from life cycle stage Y)
Most relevant impact category 2	· Process A (from life cycle stage X)
	· Process B (from life cycle stage X)
Most relevant impact category n	· Process A (from life cycle stage X)
	· Process B (from life cycle stage X)

## 4378 **B.5 Life cycle inventory**

4379 *All newly created processes shall be EF-compliant, as defined in the PEFCR guidance this document is*  
 4380 *conform with.*

4381 [The PEFCR shall indicate if sampling is allowed. If the TS allows sampling, the PEFCR shall describe the  
 4382 sampling procedure as described in the guidance and contain a sentence like:] *In case sampling is needed,*  
 4383 *it shall be conducted as specified in this PEFCR. However, sampling is not mandatory and any applicant of*  
 4384 *this PEFCR may decide to collect the data from all the plants or farms, without performing any sampling.*

### 4385 **B.5.1 List of mandatory company-specific data**

4386 [The TS shall here indicate the list of mandatory company-specific activity data and list the processes to be  
 4387 modelled with company specific data]

#### 4388 **Process a**

4389 [Provide a short description of process a. List all the activity and foreground elementary flows that shall be  
 4390 collected and the sub-processes linked to the activity data within process a. Use the table below to

4391 introduce minimum one example in the PEF CR. In case not all processes are introduced here, the full list of  
 4392 all processes shall be include in an excel file.]

4393 **Data collection requirements for mandatory process A**

Requirements for data collection purposes			Requirements for modelling purposes								Remarks
Activity data to be collected	Specific requirements (e.g. frequency, measurement standard, etc)	Unit of measure	Default dataset to be used	Dataset source (i.e. node)	UUID	TiR	TeR	GR	P	DQR	
Inputs:											
[Example: yearly electricity use]	[Example: 3 year average]	[Example: kWh/year]	[Example: Electricity grid mix 1kV-60kV/AT]	[Example: <a href="http://lcdn.thinkstep.com/Node/">http://lcdn.thinkstep.com/Node/</a> ]	[Example: 0af0a6a8-aebc-4eeb-99f8-5ccf2304b99d]	[Example: 1.6]					
Outputs:											
...	...	...	...	...	...	...					

4394 [List all the emissions and resources that shall be modelled with company-specific information within  
 4395 process a.]

4396 **Direct elementary flow collection requirements for mandatory process A**

Emissions/resources	Elementary flow	Frequency of measurement	Default measurement method <sup>90</sup>	Remarks

<sup>90</sup> Unless specific measurement methods are foreseen in a country specific legislation

4397 See excel file named "[Name PEFCR\_version number] - Life cycle inventory" for the list of all company-  
 4398 specific data to be collected, downloadable at:  
 4399 [http://ec.europa.eu/environment/eussd/smgrp/PEFCR\\_OEFSR.htm](http://ec.europa.eu/environment/eussd/smgrp/PEFCR_OEFSR.htm).

4400 **B.5.2 List of processes expected to be run by the company**

4401 The following processes are expected to be run by the company applying the PEFCR:

- 4402 ● Process X
- 4403 ● Process Y
- 4404 ● ...

4405 Process X:

4406 [Provide a short description of process x. List all the activity data and direct elementary flows that shall be  
 4407 collected and the sub-processes linked to the activity data within process X. Use the table below to  
 4408 introduce minimum one example in the PEFCR. In case not all processes are introduced here, the full list of  
 4409 all processes shall be include in an excel file.]

4410 **Data collection requirements for process X:**

Requirements for data collection purposes			Requirements for modelling purposes								Remarks
Activity data to be collected	Specific requirements (e.g. frequency, measurement standard, etc)	Unit of measure	Default dataset to be used	Dataset source (i.e. node)	UUID	TiR	G R	Te R	P	DQ R	
Inputs:											
[Example: yearly electricity use]	[Example: 3 year average]	[Example: kWh/year]	[Example: Electricity grid mix 1kV-60kV/AT]	[Example: <a href="http://lcdn.thinkstep.com/Node/">http://lcdn.thinkstep.com/Node/</a> ]	[Example: 0af0a6a8-aebc-4eeb-99f8-5ccf2304b99d]	[Example: 1.6]					
Outputs:											
...	...	...	...	...	...	...					

4411

4412 **Direct elementary flow collection requirements for process X**

Emissions/resources	Elementary flow	Frequency of measurement	Default measurement method <sup>91</sup>	Remarks

4413

4414 *See excel file named "[Name PEFCR\_version number] - Life cycle inventory" for the list of all processes to be*

4415 *expected in situation 1, downloadable at*

4416 [http://ec.europa.eu/environment/eussd/smgp/PEFCR\\_OEFSR.htm](http://ec.europa.eu/environment/eussd/smgp/PEFCR_OEFSR.htm).

4417 **B.5.3 Data gaps**

4418 [This section shall include:

- 4419 - The list of data gaps on the company-specific data to be collected that most frequently are
- 4420 encountered by companies in the specific sectors and how these data gaps may be solved in the
- 4421 context of the PEF;
- 4422 - The list of data gaps in default datasets listed in the PEFCR;
- 4423 - The list of processes excluded from the PEFCR due to missing datasets that shall not be filled in by
- 4424 the applicant;
- 4425 - The of processes for which proxies are to be used by PEF studies.

4426

4427 The TS may decide to indicate in the LCI excel file for which processes no datasets are available and

4428 therefore are considered data gaps and for which processes proxies are to be used]

4429 **B.5.4 Data quality requirements**

4430 *The data quality of each dataset and the total EF study shall be calculated and reported. The calculation of*

4431 *the DQR shall be based on the following formula with 4 criteria:*

$$DQR = \frac{Te_R + \overline{G}_R + \overline{T}i_R + \overline{P}}{4} \quad [Equation B.1]$$

4432

4433 *where TeR is the Technological-Representativeness, GR is the Geographical-Representativeness, TiR is the*

4434 *Time-Representativeness, and P is the Precision/uncertainty. The representativeness (technological,*

4435 *geographical and time-related) characterises to what degree the processes and products selected are*

4436 *depicting the system analysed, while the precision indicates the way the data is derived and related level of*

4437 *uncertainty.*

---

<sup>91</sup> Unless specific measurement methods are foreseen in a country specific legislation



4438 *The next chapters provide tables with the criteria to be used for the semi-quantitative assessment of each*  
4439 *criterion. If a dataset is constructed with company-specific activity data, company -specific emission data*  
4440 *and secondary sub-processes, the DQR of each shall be assessed separately.*

4441 [The PEFCR may specify more stringent data quality requirements and specify additional criteria for the  
4442 assessment of data quality.]

#### 4443 **B.5.4.1 Company-specific datasets**

4444 *The score of criterion P cannot be higher than 3 while the score for TiR, TeR, and GR cannot be higher than 2*  
4445 *(the DQR score shall be  $\leq 1.6$ ). The DQR shall be calculated at the level-1 disaggregation, before any*  
4446 *aggregation of sub-processes or elementary flows is performed. The DQR of company-specific datasets shall*  
4447 *be calculated as following:*

4448 *1) Select the most relevant sub-processes and direct elementary flows that account for at least 80% of the*  
4449 *total environmental impact of the company-specific dataset, listing them from the most contributing to the*  
4450 *least contributing one.*

4451 *2) Calculate the DQR criteria TeR, TiR, GR and P for each most relevant process and each most relevant*  
4452 *direct elementary flow. The values of each criterion shall be assigned based on Table B.5.*

4453 *2.a) Each most relevant elementary flow consists of the amount and elementary flow naming (e.g.*  
4454 *40 g carbon dioxide). For each most relevant elementary flow, evaluate the 4 DQR criteria named*  
4455  *$Te_{R-EF}$ ,  $Ti_{R-EF}$ ,  $Gr_{R-EF}$ ,  $P_{EF}$  in Table B.5. It shall be evaluated for example, the timing of the flow*  
4456 *measured, for which technology the flow was measured and in which geographical area.*

4457 *2.b) Each most relevant process is a combination of activity data and the secondary dataset used.*  
4458 *For each most relevant process, the DQR is calculated by the applicant of the PEFCR as a*  
4459 *combination of the 4 DQR criteria for activity data and the secondary dataset: (i)  $Ti_R$  and P shall be*  
4460 *evaluated at the level of the activity data (named  $Ti_{R-AD}$ ,  $P_{AD}$ ) and (ii)  $Te_R$ ,  $Ti_R$  and  $Gr$  shall be*  
4461 *evaluated at the level of the secondary dataset used (named  $Te_{R-SD}$ ,  $Ti_{R-SD}$  and  $Gr_{R-SD}$ ). As  $Ti_R$  is*  
4462 *evaluated twice, the mathematical average of  $Ti_{R-AD}$  and  $Ti_{R-SD}$  represents the  $Ti_R$  of the most*  
4463 *relevant process.*

4464 *3) Calculate the environmental contribution of each most-relevant process and elementary flow to the total*  
4465 *environmental impact of all most-relevant processes and elementary flows, in % (weighted using 13 EF*  
4466 *impact categories, with the exclusion of the 3 toxicity-related ones). For example, the newly developed*  
4467 *dataset has only two most relevant processes, contributing in total to 80% of the total environmental*  
4468 *impact of the dataset:*

4469 

- *Process 1 carries 30% of the total dataset environmental impact. The contribution of this process to*  
4470 *the total of 80% is 37.5% (the latter is the weight to be used).*

4471 • Process 1 carries 50% of the total dataset environmental impact. The contribution of this process to  
 4472 the total of 80% is 62.5% (the latter is the weight to be used).

4473 4) Calculate the  $Te_R$ ,  $Ti_R$ ,  $G_R$  and  $P$  criteria of the newly developed dataset as the weighted average of each  
 4474 criterion of the most relevant processes and direct elementary flows. The weight is the relative contribution  
 4475 (in %) of each most relevant process and direct elementary flow calculated in step 3.

4476 5) The applicant of the PEFCR shall the total DQR of the newly developed dataset using the equation B.2,  
 4477 where  $\overline{Te_R}$ ,  $\overline{G_R}$ ,  $\overline{Ti_R}$ ,  $\overline{P}$  are the weighted average calculated as specified in point 4).

4478 
$$DQR = \frac{\overline{Te_R} + \overline{G_R} + \overline{Ti_R} + \overline{P}}{4}$$
 [Equation B.2]

4479 NOTE: in case the newly developed dataset has most relevant processes filled in by non-EF compliant  
 4480 datasets (and thus without DQR), then these datasets cannot be included in step 4 and 5 of the DQR  
 4481 calculation. (1) The weight of step 3 shall be recalculated for the EF-compliant datasets only. Calculate the  
 4482 environmental contribution of each most-relevant EF compliant process and elementary flow to the total  
 4483 environmental impact of all most-relevant EF compliant processes and elementary flows, in %. Continue  
 4484 with step 4 and 5. (2) The weight of the non-EF compliant dataset (calculated in step 3) shall be used to  
 4485 increase the DQR criteria and total DQR accordingly. For example:

- 4486 • Process 1 carries 30% of the total dataset environmental impact and is ILCD entry level compliant.  
 4487 The contribution of this process to the total of 80% is 37.5% (the latter is the weight to be used).
- 4488 • Process 1 carries 50% of the total dataset environmental impact and is EF compliant. The  
 4489 contribution of this process to all most-relevant EF compliant processes is 100%. The latter is the  
 4490 weight to be used in step 4.
- 4491 • After step 5, the parameters  $\overline{Te_R}$ ,  $\overline{G_R}$ ,  $\overline{Ti_R}$ ,  $\overline{P}$  and the total DQR shall be multiplied with 1.375.

4492

4493 **Table B.5. How to assess the value of the DQR criteria for datasets with company-specific information**

4494 [Please, note that the reference years for criterion  $Ti_R$  in the table B.7 may be adapted by the TS]

4495 [Please, note that more than one table may be included in the PEFCR].

	$P_{EF}$ and $P_{AD}$	$Ti_{R-EF}$ and $Ti_{R-AD}$	$Ti_{R-SD}$	$Te_{R-EF}$ and $Te_{R-SD}$	$G_{R-EF}$ and $G_{R-SD}$
1	Measured/calculated <u>and</u> externally verified	The data refers to the most recent annual administration period with respect to the EF report publication date	The EF report publication date happens within the time validity of the dataset	The elementary flows and the secondary dataset reflect exactly the technology of the newly developed dataset	The data(set) reflects the exact geography where the process modelled in the newly created dataset takes place

	$P_{EF}$ and $P_{AD}$	$T_{IR-EF}$ and $T_{IR-AD}$	$T_{IR-SD}$	$Te_{R-EF}$ and $Te_{R-SD}$	$G_{R-EF}$ and $G_{R-SD}$
2	Measured/calculated and internally verified, plausibility checked by reviewer	The data refers to maximum 2 annual administration periods with respect to the EF report publication date	The EF report publication date happens not later than 2 years beyond the time validity of the dataset	The elementary flows and the secondary dataset is a proxy of the technology of the newly developed dataset	The data(set) partly reflects the geography where the process modelled in the newly created dataset takes place
3	Measured/calculated/literature and plausibility not checked by reviewer OR Qualified estimate based on calculations plausibility checked by reviewer	The data refers to maximum three annual administration periods with respect to the EF report publication date	Not applicable	Not applicable	Not applicable
4-5	Not applicable	Not applicable	Not applicable	Not applicable	Not applicable

4496 **B.5.5 Data needs matrix (DNM)**

4497 All processes required to model the product and outside the list of mandatory company-specific (listed in  
4498 section B.5.1) shall be evaluated using the Data Needs Matrix (see Table B.6). The DNM shall be used by the  
4499 PEFCR applicant to evaluate which data is needed and shall be used within the modelling of its PEF,  
4500 depending on the level of influence the applicant (company) has on the specific process. The following three  
4501 cases are found in the DNM and are explained below:

- 4502 1. **Situation 1:** the process is run by the company applying the PEFCR  
4503 2. **Situation 2:** the process is not run by the company applying the PEFCR but the company has access  
4504 to (company-)specific information.  
4505 3. **Situation 3:** the process is not run by the company applying the PEFCR and this company does not  
4506 have access to (company-)specific information.

4507 **Table B. 6. Data Needs Matrix (DNM)<sup>92</sup>. \*Disaggregated datasets shall be used.**

<sup>92</sup> The options described in the DNM are not listed in order of preference

		Most relevant process	Other process
<b>Situation 1:</b> process run by the company applying the PEFCR	<b>Option 1</b>	Provide company-specific data (as requested in the PEFCR) and create company specific dataset partially disaggregated at least at level 1 (DQR ≤1.6). Calculate the DQR values (for each criteria + total)	4509 4510 4511
	<b>Option 2</b>		Use default secondary dataset in PEFCR, in aggregated form (DQR ≤3.0). 4512 Use the default DQR values 4513
<b>Situation 2:</b> process not run by the company applying the PEFCR but with access to (company)-specific information	<b>Option 1</b>	Provide company-specific data (as requested in the PEFCR) and create company specific dataset partially disaggregated at least at level 1 (DQR ≤1.6). Calculate the DQR values (for each criteria + total)	4514 4515 4516
	<b>Option 2</b>	Use company-specific activity data for transport (distance), and substitute the sub-processes used for electricity mix and transport with supply-chain specific PEF compliant datasets (DQR ≤3.0). Re-evaluate the DQR criteria within the product specific context	
	<b>Option 3</b>		Use company-specific activity data for transport (distance), and substitute the sub-processes used for electricity mix and transport with supply-chain specific PEF compliant datasets (DQR ≤4.0). 4521 4522 4523 Use the default DQR values 4524
<b>Situation 3:</b> process not run by the company applying the PEFCR and without access to (company)-specific information	<b>Option 1</b>	Use default secondary dataset, in aggregated form (DQR ≤3.0). Re-evaluate the DQR criteria within the product specific context	
	<b>Option 2</b>		Use default secondary dataset in PEFCR, in aggregated form (DQR ≤4.0) 4528 Use the default DQR values 4529

4530

**B.5.5.1 Processes in situation 1**4531 *For each process in situation 1 there are two possible options:*

- 4532 ● *The process is in the list of most relevant processes as specified in the PEFCR or is not in the list of*
- 4533 *most relevant process, but still the company wants to provide company specific data (option 1);*

- 4534       • *The process is not in the list of most relevant processes and the company prefers to use a secondary*  
4535       *dataset (option 2).*

4536       **Situation 1/Option 1**

4537       *For all processes run by the company and where the company applying the PEFCR uses company specific*  
4538       *data. The DQR of the newly developed dataset shall be evaluated as described in section B.5.4.1.*

4539       **Situation 1/Option 2**

4540       *For the non-most relevant processes only, if the applicant decides to model the process without collecting*  
4541       *company-specific data, then the applicant shall use the secondary dataset listed in the PEFCR together with*  
4542       *its default DQR values listed here.*

4543       *If the default dataset to be used for the process is not listed in the PEFCR, the applicant of the PEFCR shall*  
4544       *take the DQR values from the metadata of the original dataset.*

4545               **B.5.5.2 Processes in situation 2**

4546       *When a process is not run by the company applying the PEFCR, but there is access to company-specific data,*  
4547       *then there are two possible options:*

- 4548
- 4549       • *The company applying the PEFCR has access to extensive supplier-specific information and wants to*  
4550       *create a new EF-compliant dataset<sup>93</sup> (Option 1);*
  - 4551       • *The company has some supplier-specific information and want to make some minimum changes*  
4552       *(Option 2).*
  - 4553       • *The process is not in the list of most relevant processes and the company prefers to use a secondary*  
4554       *dataset (option 3).*
- 4555

4556       **Situation 2/Option 1**

4557       *For all processes run by the company and where the company applying the PEFCR uses company specific*  
4558       *data. The DQR of the newly developed dataset shall be evaluated as described in section B.5.4.1.*

4559       **Situation 2/Option 2**

4560       *Company-specific activity data for transport are used and the sub-processes used for electricity mix and*  
4561       *transport with supply-chain specific PEF compliant datasets are substituted starting from the default*  
4562       *secondary dataset provided in the PEFCR.*

4563       *Please note that, the PEFCR lists all dataset names together with the UUID of their aggregated dataset. For*  
4564       *this situation, the disaggregated version of the dataset is required.*

---

<sup>93</sup> The review of the newly created dataset is optional

4565 *The applicant of the PEFCR shall make the DQR values of the dataset used context-specific by re-evaluating*  
 4566 *Te<sub>R</sub> and Ti<sub>R</sub>, using the table(s) provided. The criteria G<sub>R</sub> shall be lowered by 30%<sup>94</sup> and the criteria P shall*  
 4567 *keep the original value.*

4568 **Situation 2/Option 3**

4569 *For the non-most relevant processes, the applicant may use the corresponding secondary dataset listed in*  
 4570 *the PEFCR together with its DQR values.*

4571 *If the default dataset to be used for the process is not listed in the PEFCR, the applicant of the PEFCR shall*  
 4572 *take the DQR values from the original dataset.*

4573 **Table B.7. How to assess the value of the DQR criteria when secondary datasets are used.**

4574 **[More than one table may be included in the PEFCR and entered in the section on life cycle stages]**

	<b>Ti<sub>R</sub></b>	<b>Te<sub>R</sub></b>	<b>G<sub>R</sub></b>
<b>1</b>	<i>The EF report publication date happens within the time validity of the dataset</i>	<i>The technology used in the EF study is exactly the same as the one in scope of the dataset</i>	<i>The process modelled in the EF study takes place in the country the dataset is valid for</i>
<b>2</b>	<i>The EF report publication date happens not later than 2 years beyond the time validity of the dataset</i>	<i>The technologies used in the EF study is included in the mix of technologies in scope of the dataset</i>	<i>The process modelled in the EF study takes place in the geographical region (e.g. Europe) the dataset is valid for</i>
<b>3</b>	<i>The EF report publication date happens not later than 4 years beyond the time validity of the dataset</i>	<i>The technologies used in the EF study are only partly included in the scope of the dataset</i>	<i>The process modelled in the EF study takes place in one of the geographical regions the dataset is valid for</i>
<b>4</b>	<i>The EF report publication date happens not later than 6 years beyond the time validity of the dataset</i>	<i>The technologies used in the EF study are similar to those included in the scope of the dataset</i>	<i>The process modelled in the EF study takes place in a country that is not included in the geographical region(s) the dataset is valid for, but sufficient similarities are estimated based on expert judgement.</i>
<b>5</b>	<i>The EF report publication date happens later than 6 years after the time validity of the dataset</i>	<i>The technologies used in the EF study are different from those included in the scope of the dataset</i>	<i>The process modelled in the EF study takes place in a different country than the one the dataset is valid for</i>

4575

4576 **B.5.5.3 Processes in situation 3**

4577 *When a process is not run by the company applying the PEFCR and the company does not have access to*  
 4578 *company-specific data, there are two possible options:*

---

<sup>94</sup> In situation 2, option 2 it is proposed to lower the parameter G<sub>R</sub> by 30% in order to incentivize the use of company specific information and reward the efforts of the company in increasing the geographic representativeness of a secondary dataset through the substitution of the electricity mixes and of the distance and means of transportation.

- 4579
- 4580       • *It is in the list of most relevant processes (situation 3, option 1)*
- 4581       • *It is not in the list of most relevant processes (situation 3, option 2)*

4582    **Situation 3/Option 1**

4583    *In this case, the applicant of the PEFCR shall make the DQR values of the dataset used context-specific by*  
4584    *re-evaluating  $Te_R$ ,  $Ti_R$  and  $G_r$ , using the table(s) provided. The criteria P shall keep the original value.*

4585    **Situation 3/Option 2**

4586    *For the non-most relevant processes, the applicant shall use the corresponding secondary dataset listed in*  
4587    *the PEFCR together with its DQR values.*

4588    *If the default dataset to be used for the process is not listed in the PEFCR, the applicant of the PEFCR shall*  
4589    *take the DQR values from the original dataset.*

4590                **B.5.6 Which datasets to use?**

4591    *The secondary datasets to be used by the applicant are those listed in this PEFCR. Whenever a dataset*  
4592    *needed to calculate the PEF-profile is not among those listed in this PEFCR, then the applicant shall choose*  
4593    *between the following options (in hierarchical order):*

- 4594                • *Use an EF-compliant dataset available on one of the following nodes:*
- 4595                    ○ <http://eplca.jrc.ec.europa.eu/EF-node/>
  - 4596                    ○ <http://lcdn.blonkconsultants.nl>
  - 4597                    ○ <http://ecoinvent.lca-data.com>
  - 4598                    ○ <http://lcdn-cepe.org>
  - 4599                    ○ <https://lcdn.quantis-software.com/PEF/>
  - 4600                    ○ <http://lcdn.thinkstep.com/Node>
- 4601                • *Use an EF-compliant dataset available in a free or commercial source;*
- 4602                • *Use another EF-compliant dataset considered to be a good proxy. In such case this*  
4603    *information shall be included in the "limitation" section of the PEF report.*
- 4604                • *Use an ILCD-entry level-compliant dataset. In such case this information shall be included in*  
4605    *the "data gap" section of the PEF report.*
- 4606

4607                **B.5.7 How to calculate the average DQR of the study**

4608    *In order to calculate the average DQR of the EF study, the applicant shall calculate separately the  $Te_R$ ,  $Ti_R$ ,*  
4609     *$GR$  and  $P$  for the EF study as the weighted average of all most relevant processes, based on their relative*  
4610    *environmental contribution to the total single score (excluding the 3 toxicity-related ones). The calculation*  
4611    *rules explained in chapter B.5.4 shall be used.*

4612 **B.5.8 Allocation rules**

4613 [The PEFCR shall report which allocation rules shall be used by PEF studies and how the  
 4614 modelling/calculations shall be made. In case of economic allocation is used, the allocation factors shall be  
 4615 fixed and provided in the PEFCR. The following template shall be used:]

4616 **Table B. 8. Allocation rules**

<i>Process</i>	<i>Allocation rule</i>	<i>Modelling instructions</i>
[Example: Process A]	[Example: Physical allocation]	[Example: The mass of the different outputs shall be used. ...]
...	...	

4617 **B.5.9 Electricity modelling**

4618 *The guidelines in this section shall only be used for the processes where company-specific information is*  
 4619 *collected (situation 1 / Option 1 & 2 / Option 1of the DNM).*

4620 *The following electricity mix shall be used in hierarchical order:*

- 4621 (i) *Supplier-specific electricity product shall be used if:*
  - 4622 (a) *available, and*
  - 4623 (b) *the set of minimum criteria to ensure the contractual instruments are reliable is*  
 4624 *met.*
- 4625 (ii) *The supplier-specific total electricity mix shall be used if:*
  - 4626 (a) *available, and*
  - 4627 (b) *the set of minimum criteria that to ensure the contractual instruments are*  
 4628 *reliable is met.*
- 4629 (iii) *As a last option the 'country-specific residual grid mix, consumption mix' shall be used*  
 4630 *(available at <http://lcdn.thinkstep.com/Node/>). Country-specific means the country in which the*  
 4631 *life cycle stage occurs. This may be an EU country or non-EU country. The residual grid mix*  
 4632 *characterizes the unclaimed, untracked or publicly shared electricity. This prevents double*  
 4633 *counting with the use of supplier-specific electricity mixes in (i) and (ii).*  
 4634

4635 *Note: if for a country, there is a 100% tracking system in place, case (i) shall be applied.*

4636 *Note: for the use stage, the consumption grid mix shall be used.*

4637 *The environmental integrity of the use of supplier-specific electricity mix depends on ensuring that*  
 4638 *contractual instruments (for tracking) **reliably and uniquely convey claims to consumers**. Without this, the*  
 4639 *PEF lacks the accuracy and consistency necessary to drive product/corporate electricity procurement*



4640 *decisions and accurate consumer (buyer of electricity) claims. Therefore, a set of minimum criteria that*  
4641 *relate to the integrity of the contractual instruments as reliable conveyers of environmental footprint*  
4642 *information has been identified. They represent the minimum features necessary to use supplier-specific mix*  
4643 *within PEF studies.*

4644 *Set of minimal criteria to ensure contractual instruments from suppliers:*

4645 *A supplier-specific electricity product/mix may only be used when the applicant ensures that any*  
4646 *contractual instrument meets the criteria specified below. If contractual instruments do not meet the*  
4647 *criteria, then 'country-specific residual grid mix, consumption mix' shall be used in the modelling.*

4648 *A contractual instrument used for electricity modelling shall:*

4649 *1. Convey attributes:*

- 4650 ● *Convey the energy type mix associated with the unit of electricity produced.*
- 4651 ● *The energy type mix shall be calculated based on delivered electricity, incorporating certificates*  
4652 *sourced and retired on behalf of its customers. Electricity from facilities for which the attributes*  
4653 *have been sold off (via contracts or certificates) shall be characterized as having the environmental*  
4654 *attributes of the country residual consumption mix where the facility is located.*

4655 *2. Be a unique claim:*

- 4656 ● *Be the only instruments that carry the environmental attribute claim associated with that quantity*  
4657 *of electricity generated.*
- 4658 ● *Be tracked and redeemed, retired, or cancelled by or on behalf of the company (e.g. by an audit of*  
4659 *contracts, third party certification, or may be handled automatically through other disclosure*  
4660 *registries, systems, or mechanisms).*

4661 *3. Be as close as possible to the period to which the contractual instrument is applied.*

4662 *[The TS may provide more information following the guidance]*

4663 *Modelling 'country-specific residual grid mix, consumption mix':*

4664 *Datasets for residual grid mix, per energy type, per country and per voltage have been purchased by the*  
4665 *European Commission and are available in the dedicated node (<http://lcdn.thinkstep.com/Node/>). In case*  
4666 *the necessary dataset is not available, an alternative dataset shall be chosen according to the procedure*  
4667 *described in section B.5.8. If no dataset is available, the following approach may be used:*

4668 *Determine the country consumption mix (e.g. X% of MWh produced with hydro energy, Y% of MWh*  
4669 *produced with coal power plant) and combined them with LCI datasets per energy type and country/region*  
4670 *(e.g. LCI dataset for the production of 1MWh hydro energy in Switzerland):*

4671 ● *Activity data related to non-EU country consumption mix per detailed energy type shall be*  
4672 *determined based on:*

4673

4674 ○ *Domestic production mix per production technologies*

4675 ○ *Import quantity and from which neighbouring countries*

- 4676 ○ *Transmission losses*
- 4677 ○ *Distribution losses*
- 4678 ○ *Type of fuel supply (share of resources used, by import and / or domestic supply)*
- 4679 *These data may be found in the publications of the International Energy Agency (IEA).*

4680 ● *Available LCI datasets per fuel technologies in the node. The LCI datasets available are generally*  
 4681 *specific to a country or a region in terms of:*

- 4682 ○ *Fuel supply (share of resources used, by import and / or domestic supply),*
- 4683 ○ *Energy carrier properties (e.g. element and energy contents)*
- 4684 ○ *Technology standards of power plants regarding efficiency, firing technology, flue-*  
 4685 *gas desulphurisation, NOx removal and de-dusting.*

4686 *Allocation rules:*

4687 [The PEFCR shall report which physical relationship shall be used by PEF studies: (i) to subdivide the  
 4688 electricity consumption among multiple products for each process (e.g. mass, number of pieces, volume...)  
 4689 and (ii) to reflect the ratios of production/ratios of sales between EU countries/regions when a product is  
 4690 produced in different locations or sold in different countries. Where such data are not available, the  
 4691 average EU mix (EU-28 +EFTA), or region representative mix, shall be used. The following template shall be  
 4692 used:]

4693 **Table B. 9. Allocation rules for electricity.**

<i>Process</i>	<i>Physical relationship</i>	<i>Modelling instructions</i>
<i>Process A</i>	<i>Mass</i>	
<i>Process B</i>	<i>N of pieces</i>	
<i>...</i>	<i>...</i>	

4694 *If the consumed electricity comes from more than one electricity mix, each mix source shall be used in terms*  
 4695 *of its proportion in the total kWh consumed. For example, if a fraction of this total kWh consumed is coming*  
 4696 *from a specific supplier a supplier-specific electricity mix shall be used for this part. See below for on-site*  
 4697 *electricity use.*

4698 *A specific electricity type may be allocated to one specific product in the following conditions:*

- 4699 a. *The production (and related electricity consumption) of a product occurs in a separate site*  
 4700 *(building), the energy type physical related to this separated site may be used.*
- 4701 d. *The production (and related electricity consumption) of a product occurs in a shared space with*  
 4702 *specific energy metering or purchase records or electricity bills, the product specific information*  
 4703 *(measure, record, bill) may be used.*

4704 e. All the products produced in the specific plant are supplied with a public available PEF study. The  
4705 company who wants to make the claim shall make all PEF studies available. The allocation rule  
4706 applied shall be described in the PEF study, consistently applied in all PEF studies connected to the  
4707 site and verified. An example is the 100% allocation of a greener electricity mix to a specific product.  
4708

4709 On-site electricity generation:

4710 *If on-site electricity production is equal to the site own consumption, two situations apply:*

- 4711 ○ *No contractual instruments have been sold to a third party: the own electricity mix (combined with*  
4712 *LCI datasets) shall be modelled.*
- 4713 ○ *Contractual instruments have been sold to a third party: the 'country-specific residual grid mix,*  
4714 *consumption mix' (combined with LCI datasets) shall be used.*

4715

4716 *If electricity is produced in excess of the amount consumed on-site within the defined system boundary and*  
4717 *is sold to, for example, the electricity grid, this system can be seen as a multifunctional situation. The*  
4718 *system will provide two functions (e.g. product + electricity) and the following rules shall be followed:*

- 4719 ○ *If possible, apply subdivision.*
- 4720 ○ *Subdivision applies both to separate electricity productions or to a common electricity production*  
4721 *where you can allocate based on electricity amounts the upstream and direct emissions to your own*  
4722 *consumption and to the share you sell out of your company (e.g. if a company has a wind mill on its*  
4723 *production site and export 30% of the produced electricity, emissions related to 70% of produced*  
4724 *electricity should be accounted in the PEF study.*
- 4725 ○ *If not possible, direct substitution shall be used. The country-specific residual consumption electricity*  
4726 *mix shall be used as substitution<sup>95</sup>.*
- 4727 ○ *Subdivision is considered as not possible when upstream impacts or direct emissions are closely*  
4728 *related to the product itself.*

4729 **B.5.10 Climate change modelling**

4730 *The impact category 'climate change' shall be modelled considering three sub-categories:*

- 4731 1. *Climate change – fossil: This sub-category includes emissions from peat and*  
4732 *calcination/carbonation of limestone. The emission flows ending with '(fossil)' (e.g., 'carbon dioxide*  
4733 *(fossil)'' and 'methane (fossil)') shall be used if available.*
- 4734 2. *Climate change – biogenic: This sub-category covers carbon emissions to air (CO<sub>2</sub>, CO and CH<sub>4</sub>)*  
4735 *originating from the oxidation and/or reduction of biomass by means of its transformation or*  
4736 *degradation (e.g. combustion, digestion, composting, landfilling) and CO<sub>2</sub> uptake from the*  
4737 *atmosphere through photosynthesis during biomass growth – i.e. corresponding to the carbon*  
4738 *content of products, biofuels or aboveground plant residues such as litter and dead wood. Carbon*

---

<sup>95</sup> For some countries, this option is a best case rather than a worst case.

4739 *exchanges from native forests<sup>96</sup> shall be modelled under sub-category 3 (incl. connected soil*  
4740 *emissions, derived products, residues). The emission flows ending with '(biogenic)' shall be used.*  
4741 *A simplified modelling approach shall be used when modelling the foreground emissions: [to be*  
4742 *answered by the TS: Yes/No] [If yes, the following text shall be included in the PEFCR: “Only the*  
4743 *emission 'methane (biogenic)' is modelled, while no further biogenic emissions and uptakes from*  
4744 *atmosphere are included. When methane emissions can be both fossil or biogenic, the release of*  
4745 *biogenic methane shall be modelled first and then the remaining fossil methane.”] [If no, the*  
4746 *following text shall be included: “All biogenic carbon emissions and removals shall be modelled*  
4747 *separately. However, note that the corresponding characterisation factors for biogenic CO<sub>2</sub> uptakes*  
4748 *and emissions within the EF impact assessment method are set to zero.” [The PEFCR shall provide*  
4749 *complementary characterisation factors to be applied in case these flows are to be used to*  
4750 *calculate additional environmental information and shall describe how the additional*  
4751 *environmental information shall be calculated.]*

4752 [For final products only:]

4753 *Does the product life cycle or part of the life cycle has a carbon storage beyond 100 years and*  
4754 *therefore credits from biogenic carbon storage shall be modelled: [to be answered by the TS:*  
4755 *Yes/No] [If yes, the following text shall be included: “Carbon credits shall be modelled by including*  
4756 *an emission uptake as 'resource from air' using the elementary flow 'carbon dioxide (biogenic-*  
4757 *100yr)'. Carbon credits shall be properly allocated among the different byproducts the system*  
4758 *delivered over the full timeframe (see respective chapters for more information).” The PEFCR shall*  
4759 *specify which proof needs to be provided in order to get the credits.]*

4760 [For intermediate products only:]

4761 *The biogenic carbon content at factory gate (physical content and allocated content) shall be*  
4762 *reported as 'additional technical information'.*

4763 3. *Climate change – land use and land transformation: This sub-category accounts for carbon uptakes*  
4764 *and emissions (CO<sub>2</sub>, CO and CH<sub>4</sub>) originating from carbon stock changes caused by land use change*  
4765 *and land use. This sub-category includes biogenic carbon exchanges from deforestation, road*  
4766 *construction or other soil activities (incl. soil carbon emissions). For native forests, all related CO<sub>2</sub>*  
4767 *emissions are included and modelled under this sub-category (including connected soil emissions,*  
4768 *products derived from native forest<sup>97</sup> and residues), while their CO<sub>2</sub> uptake is excluded. The*  
4769 *emission flows ending with '(land use change)' shall be used.*

4770 *For land use change, all carbon emissions and removals shall be modelled following the modelling*  
4771 *guidelines of PAS 2050:2011 (BSI 2011) and the supplementary document PAS2050-1:2012 (BSI*

---

<sup>96</sup> Native forests – represents native or long-term, non-degraded forests. Definition adapted from table 8 in Annex V C(2010)3751 to Directive 2009/28/EC.

<sup>97</sup> Following the instantaneous oxidation approach in IPCC 2013 (Chapter 2).

4772 2012) for horticultural products. PAS 2050:2011 (BSI 2011): Large emissions of GHGs can result as a  
4773 consequence of land use change. Removals as a direct result of land use change (and not as a result  
4774 of long-term management practices) do not usually occur, although it is recognized that this could  
4775 happen in specific circumstances. Examples of direct land use change are the conversion of land  
4776 used for growing crops to industrial use or conversion from forestland to cropland. All forms of land  
4777 use change that result in emissions or removals are to be included. Indirect land use change refers  
4778 to such conversions of land use as a consequence of changes in land use elsewhere. While GHG  
4779 emissions also arise from indirect land use change, the methods and data requirements for  
4780 calculating these emissions are not fully developed. Therefore, the assessment of emissions arising  
4781 from indirect land use change is not included.

4782 The GHG emissions and removals arising from direct land use change shall be assessed for any input  
4783 to the life cycle of a product originating from that land and shall be included in the assessment of  
4784 GHG emissions. The emissions arising from the product shall be assessed on the basis of the default  
4785 land use change values provided in PAS 2050:2011 Annex C, unless better data is available. For  
4786 countries and land use changes not included in this annex, the emissions arising from the product  
4787 shall be assessed using the included GHG emissions and removals occurring as a result of direct land  
4788 use change in accordance with the relevant sections of the IPCC (2006). The assessment of the  
4789 impact of land use change shall include all direct land use change occurring not more than 20 years,  
4790 or a single harvest period, prior to undertaking the assessment (whichever is the longer). The total  
4791 GHG emissions and removals arising from direct land use change over the period shall be included  
4792 in the quantification of GHG emissions of products arising from this land on the basis of equal  
4793 allocation to each year of the period<sup>98</sup>.

4794 1) Where it can be demonstrated that the land use change occurred more than 20 years prior to the  
4795 assessment being carried out, no emissions from land use change should be included in the  
4796 assessment.

4797 2) Where the timing of land use change cannot be demonstrated to be more than 20 years, or a  
4798 single harvest period, prior to making the assessment (whichever is the longer), it shall be assumed  
4799 that the land use change occurred on 1 January of either:

- 4800 ○ the earliest year in which it can be demonstrated that the land use change had occurred; or
- 4801 ○ on 1 January of the year in which the assessment of GHG emissions and removals is being  
4802 carried out.

4803 The following hierarchy shall apply when determining the GHG emissions and removals arising from  
4804 land use change occurring not more than 20 years or a single harvest period, prior to making the  
4805 assessment (whichever is the longer):

- 4806 1. where the country of production is known and the previous land use is known, the GHG  
4807 emissions and removals arising from land use change shall be those resulting from the

---

<sup>98</sup> In case of variability of production over the years, a mass allocation should be applied.

4808 *change in land use from the previous land use to the current land use in that country*  
4809 *(additional guidelines on the calculations can be found in PAS 2050-1:2012);*

4810 2. *where the country of production is known, but the former land use is not known, the GHG*  
4811 *emissions arising from land use change shall be the estimate of average emissions from the*  
4812 *land use change for that crop in that country (additional guidelines on the calculations can*  
4813 *be found in PAS 2050-1:2012);*

4814 3. *where neither the country of production nor the former land use is known, the GHG*  
4815 *emissions arising from land use change shall be the weighted average of the average land*  
4816 *use change emissions of that commodity in the countries in which it is grown.*

4817 *Knowledge of the prior land use can be demonstrated using a number of sources of information,*  
4818 *such as satellite imagery and land survey data. Where records are not available, local knowledge of*  
4819 *prior land use can be used. Countries in which a crop is grown can be determined from import*  
4820 *statistics, and a cut-off threshold of not less than 90% of the weight of imports may be applied.*  
4821 *Data sources, location and timing of land use change associated with inputs to products shall be*  
4822 *reported.*

4823 *Soil carbon storage shall be modelled, calculated and reported as additional environmental*  
4824 *information: [to be answered by the TS: Yes/No] [If yes, the PEFCR shall specify which proof needs*  
4825 *to be provided and include the modelling rules.]*

4826 *The sum of the three sub-categories shall be reported.*

4827 *The sub-category 'Climate change-biogenic' shall be reported separately: [to be answered by the TS:*  
4828 *Yes/No]*

4829 *The sub-category 'Climate change-land use and land transformation' shall be reported separately: [to be*  
4830 *answered by the TS: Yes/No]*

### 4831 **B.5.11 Modelling of wastes and recycled content**

4832 *The waste of products used during the manufacturing, distribution, retail, the use stage or after use shall be*  
4833 *included in the overall modelling of the life cycle of the organisation. Overall, this should be modelled and*  
4834 *reported at the life cycle stage where the waste occurs. This section gives guidelines on how to model the*  
4835 *End-of-Life of products as well as the recycled content.*

4836 [For final products:]

4837 *The Circular Footprint Formula is used to model the End-of-Life of products as well as the recycled content*  
4838 *and is a combination of "material + energy + disposal", i.e.:*

4839 **Material**  $(1 - R_1)E_V + R_1 \times \left( AE_{recycled} + (1 - A)E_V \times \frac{Q_{Sin}}{Q_p} \right) + (1 - A)R_2 \times \left( E_{recyclingEoL} - E_V^* \times \frac{Q_{Sout}}{Q_p} \right)$

4840 **Energy**  $(1 - B)R_3 \times (E_{ER} - LHV \times X_{ER,heat} \times E_{SE,heat} - LHV \times X_{ER,elec} \times E_{SE,elec})$

4841 **Disposal**  $(1 - R_2 - R_3) \times E_D$

4842 [For construction products:]

4843 *The Circular Footprint Formula is used to model the End-of-Life of products as well as the recycled content:*

4844

<b>Production burdens</b>	$(1 - R_1)E_V + R_1 \times E_{recycled}$	<b>Cradle-to-gate</b>
<b>Burdens and benefits related to secondary materials input</b>	$-(1 - A)R_1 \times \left( E_{recycled} - E_V \times \frac{Q_{Sin}}{Q_P} \right)$	
<b>Burdens and benefits related to secondary materials output</b>	$(1 - A)R_2 \times \left( E_{recyclingEoL} - E_V^* \times \frac{Q_{Sout}}{Q_P} \right)$	
<b>Energy recovery</b>	$(1 - B)R_3 \times \left( E_{ER} - LHV \times X_{ER,heat} \times E_{SE,heat} - LHV \times X_{ER,elec} \times E_{SE,elec} \right)$	
<b>Disposal</b>	$(1 - R_2 - R_3) \times E_D$	

Additional information from the EoL stage

4845

4846 *With the following parameters:*

4847 **A:** *allocation factor of burdens and credits between supplier and user of recycled materials.*

4848 **B:** *allocation factor of energy recovery processes: it applies both to burdens and credits. It shall be set to*  
 4849 *zero for all PEF studies.*

4850 **Q<sub>Sin</sub>:** *quality of the ingoing secondary material, i.e. the quality of the recycled material at the point of*  
 4851 *substitution.*

4852 **Q<sub>Sout</sub>:** *quality of the outgoing secondary material, i.e. the quality of the recyclable material at the point of*  
 4853 *substitution.*

4854 **Q<sub>p</sub>:** *quality of the primary material, i.e. quality of the virgin material.*

4855 **R<sub>1</sub>:** *it is the proportion of material in the input to the production that has been recycled from a previous*  
 4856 *system.*

4857 **R<sub>2</sub>**: it is the proportion of the material in the product that will be recycled (or reused) in a subsequent  
4858 system. R<sub>2</sub> shall therefore take into account the inefficiencies in the collection and recycling (or reuse)  
4859 processes. R<sub>2</sub> shall be measured at the output of the recycling plant.

4860 **R<sub>3</sub>**: it is the proportion of the material in the product that is used for energy recovery at EoL.

4861 **E<sub>recycled</sub> (E<sub>rec</sub>)**: specific emissions and resources consumed (per functional unit) arising from the recycling  
4862 process of the recycled (reused) material, including collection, sorting and transportation process.

4863 **E<sub>recyclingEoL</sub> (E<sub>recEoL</sub>)**: specific emissions and resources consumed (per functional unit) arising from the recycling  
4864 process at EoL, including collection, sorting and transportation process.

4865 **E<sub>v</sub>**: specific emissions and resources consumed (per functional unit) arising from the acquisition and pre-  
4866 processing of virgin material.

4867 **E\*<sub>v</sub>**: specific emissions and resources consumed (per functional unit) arising from the acquisition and pre-  
4868 processing of virgin material assumed to be substituted by recyclable materials.

4869 **EER**: specific emissions and resources consumed (per functional unit) arising from the energy recovery  
4870 process (e.g. incineration with energy recovery, landfill with energy recovery, ...).

4871 **E<sub>SE,heat</sub> and E<sub>SE,elec</sub>**: specific emissions and resources consumed (per functional unit) that would have arisen  
4872 from the specific substituted energy source, heat and electricity respectively.

4873 **ED**: specific emissions and resources consumed (per functional unit) arising from disposal of waste material  
4874 at the EoL of the analysed product, without energy recovery.

4875 **X<sub>ER,heat</sub> and X<sub>ER,elec</sub>**: the efficiency of the energy recovery process for both heat and electricity.

4876 **LHV**: Lower Heating Value of the material in the product that is used for energy recovery.

4877 [Within the respective chapters, the following parameters shall be provided in the PEFCR:

4878       • all A values to be used shall be listed, together with a reference to the guidance and Annex C.  
4879       • all quality ratios to be used, those that are PEFCR specific and those used for packaging.  
4880       • default R1 values for all default material datasets (in case no company-specific values are  
4881       available), together with a reference to the guidance and Annex C. They shall be set to 0% when no  
4882       application-specific data is available.  
4883       • default R2 values to be used in case no company-specific values are available, together with a  
4884       reference to the guidance and Annex C]

4885



4886

4887 **B.6 Life cycle stages**

4888 **B.6.1 Raw material acquisition and pre-processing**

4889 [The PEFCR shall list all technical requirements and assumptions to be used by the applicant. Furthermore,  
4890 it shall list all processes taking place in this life cycle stage (according to the model of the RP) according to  
4891 the table provided below (transport in separate table). The Table may be adapted by the TS as  
4892 appropriate.]

4893 **Table B. 10. Raw material acquisition and processing (capitals indicate those processes expected to be run by the**  
4894 **company)**

Process name*	Unit of measurement (output)	Default				UUID	Default DQR				Most relevant process [Y/N]
		R <sub>1</sub>	Amount per FU	Dataset	Dataset source		P	TiR	GR	TeR	

4895 [Please write in CAPITAL LETTERS the name of those processes expected to be run by the company]

4896 *The applicant shall report the DQR values (for each criterion + total) for all the datasets used.*

4897 [Packaging should be modelled as part of the raw material acquisition stage of the life cycle.]

4898 [PEFCRs that include the use of beverage cartons or bag-in-box packaging shall/should provide information  
4899 on the amounts input materials (also called the bill of material) and state that these packagings  
4900 shall/should be modelled by combining the prescribed amounts of the material datasets with the  
4901 prescribed conversion dataset.]

4902 [PEFCRs that include reusable packaging from third party operated pools shall provide default reuse rates.  
4903 PEFCRs with company owned packaging pools shall specify that the reuse rate shall be calculated using  
4904 supply-chain-specific data only. The two different modelling approaches as presented in the PEFCR  
4905 guidance shall be used and copied in the PEFCR (see chapter 2). The PEFCR shall include the following: “The  
4906 raw material consumption of reusable packaging shall be calculated by dividing the actual weight of the  
4907 packaging by the reuse rate.”]

4908 [For the different ingredients transported from supplier to factory, the PEFCR applicant needs data on (i)  
 4909 transport mode, (ii) distance per transport mode, (iii) utilisation ratios for truck transport and (iv) empty  
 4910 return modelling for truck transport. The PEFCR shall provide default data for these or request these data  
 4911 in the list of mandatory company-specific information. The default values provided in the guidance shall be  
 4912 applied unless PEFCR-specific data is available. In case the guidance is not applied, the reasoning shall be  
 4913 clearly explained and justified. The table below shall be used.]

4914 **Table B. 11. Transport (capitals indicate those processes expected to be run by the company)**

Processes name*	Unit of measurement (output)	Default (per FU)			Default dataset	Data set source	UUID	Default DQR				Most relevant [Y/N]
		Distance	Utilisation ratio*	Empty return				P	TiR	GR	TeR	

4915 \*The applicant of this PEFCR shall always check the utilisation ratio applied in the default dataset and adapt  
 4916 it accordingly.

4917 [Please write in CAPITAL LETTERS the name of those processes expected to be run by the company]

4918 [PEFCRs that include reusable packaging shall include the following: “The reuse rate affects the quantity of  
 4919 transport that is needed per FU. The transport impact shall be calculated by dividing the one-way trip  
 4920 impact by the number of times this packaging is reused.”]

4921 **Modelling the recycled content (if applicable)**

4922 [If applicable the following text shall be included:]

4923 The following formula is used to model the recycled content:

4924 
$$(1 - R_1)E_V + R_1 \times \left( AE_{recycled} + (1 - A)E_V \times \frac{Q_{sin}}{Q_p} \right)$$

4925 The  $R_1$  values applied shall be supply-chain or default as provided in the table above, in relation with the  
 4926 DNM. Material-specific values based on supply market statistics are not accepted as a proxy. The applied  $R_1$   
 4927 values shall be subject to PEF study verification.

4928 When using supply-chain specific  $R_1$  values other than 0, traceability throughout the supply chain is  
 4929 necessary. The following general guidelines shall be followed when using supply-chain specific  $R_1$  values:

- 4930 ● The supplier information (through e.g., statement of conformity or delivery note) shall be  
 4931 maintained during all stages of production and delivery at the converter;
- 4932 ● Once the material is delivered to the converter for production of the end products, the converter  
 4933 shall handle information through their regular administrative procedures;
- 4934 ● The converter for production of the end products claiming recycled content shall demonstrate  
 4935 through his management system the [%] of recycled input material into the respective end  
 4936 product(s).
- 4937 ● The latter demonstration shall be transferred upon request to the user of the end product. In case a  
 4938 PEF profile is calculated and reported, this shall be stated as additional technical information of the  
 4939 PEF profile.
- 4940 ● Company-owned traceability systems can be applied as long as they cover the general guidelines  
 4941 outlined above.

4942  
 4943 [Industry systems can be applied as long as they cover the general guidelines outlined above. In that case,  
 4944 the text above can be replaced by those industry specific rules. If not, they shall be supplemented with the  
 4945 general guidelines above.]

4946  
 4947 [Default parameters for  $A$ ,  $Q_{sin}/Q_p$  and  $E_{recycled}$  shall be selected by the TS from Annex C, at the point of  
 4948 substitution and per application or material, and shall be listed in a table in this section.]

4949 [For intermediate products only:]

4950 The PEF profile shall be calculated and reported using  $A$  equal to 1.  
 4951 Under additional technical information the results shall be reported for different applications with the  
 4952 following  $A$  values:

<b>Application</b>	<b>A value to be used</b>

4954  
 4955 [For intermediate construction products only:]

4956 The PEF profile shall be calculated and reported using the following formula:

4957 
$$(1 - R_1)E_V + R_1 \times E_{recycled}$$

4958 The profile of the “Burdens and benefits related to secondary materials input” shall be calculated and  
 4959 reported under 'additional technical information' using the following  $A$  value [fill in].

4960 *Burdens and benefits related to secondary materials input:*

4961 
$$-(1 - A)R_1 \times \left( E_{recycled} - E_V \times \frac{Q_{Sin}}{Q_p} \right)$$

4962

4963 [The default A values to be used shall be provided in the PEFCR.]

4964 **B.6.2 Agricultural modelling (to be included only if applicable)**

4965 [In case agricultural production is part of the scope of the PEFCR the following text shall be included.  
4966 Sections that are not relevant can be removed.]

4967 *Handling multi-functional processes: The rules described in the LEAP Guideline shall be followed:*  
4968 *‘Environmental performance of animal feeds supply chains (pages 36-43), FAO 2015, available at*  
4969 *<http://www.fao.org/partnerships/leap/publications/en/>’.*

4970 *Use of crop type specific and country-region-or-climate specific data for yield, water and land use, land use*  
4971 *change, fertiliser (artificial and organic) amount (N, P amount) and pesticide amount (per active*  
4972 *ingredient), per hectare per year, if available.*

4973 *Cultivation data shall be collected over a period of time sufficient to provide an average assessment of the*  
4974 *life cycle inventory associated with the inputs and outputs of cultivation that will offset fluctuations due to*  
4975 *seasonal differences:*

- 4976
  - 4977 • *For annual crops, an assessment period of at least three years shall be used (to level out differences*  
4978 *in crop yields related to fluctuations in growing conditions over the years such as climate, pests and*  
4979 *diseases, et cetera). Where data covering a three-year period is not available i.e. due to starting up*  
4980 *a new production system (e.g. new greenhouse, newly cleared land, shift to other crop), the*  
4981 *assessment may be conducted over a shorter period, but shall be not less than 1 year. Crops/plants*  
4982 *grown in greenhouses shall be considered as annual crops/plants, unless the cultivation cycle is*  
4983 *significantly shorter than a year and another crop is cultivated consecutively within that year.*  
4984 *Tomatoes, peppers and other crops which are cultivated and harvested over a longer period*  
4985 *through the year are considered as annual crops.*
  - 4986 • *For perennial plants (including entire plants and edible portions of perennial plants) a steady state*  
4987 *situation (i.e. where all development stages are proportionally represented in the studied time*  
*period) shall be assumed and a three-year period shall be used to estimate the inputs and outputs<sup>99</sup>.*

---

<sup>99</sup> The underlying assumption in the cradle to gate life cycle inventory assessment of horticultural products is that the inputs and outputs of the cultivation are in a ‘steady state’, which means that all development stages of perennial crops (with different quantities of inputs and outputs) shall be proportionally represented in the time period of cultivation that is studied. This approach gives the advantage that inputs and outputs of a relatively short period can be used for the calculation of the cradle-to-gate life cycle inventory from the perennial crop product. Studying all development stages of a horticultural perennial crop can have a lifespan of 30 years and more (e.g. in case of fruit and nut trees).

- 4988       • *Where the different stages in the cultivation cycle are known to be disproportional, a correction shall be made by adjusting the crop areas allocated to different development stages in proportion to the crop areas expected in a theoretical steady state. The application of such correction shall be justified and recorded. The life cycle inventory of perennial plants and crops shall not be undertaken until the production system actually yields output.*
- 4989
- 4990
- 4991
- 4992
- 4993       • *For crops that are grown and harvested in less than one year (e.g. lettuce produced in 2 to 4 months) data shall be gathered in relation to the specific time period for production of a single crop, from at least three recent consecutive cycles. Averaging over three years can best be done by first gathering annual data and calculating the life cycle inventory per year and then determine the three years average.*
- 4994
- 4995
- 4996
- 4997
- 4998

4999       Pesticide emissions shall be modelled as specific active ingredients. As default approach, the pesticides applied on the field shall be modelled as 90% emitted to the agricultural soil compartment, 9% emitted to air and 1% emitted to water.

5000

5001

5002       *Fertiliser (and manure) emissions shall be differentiated per fertilizer type and cover as a minimum:*

- 5003       • *NH<sub>3</sub>, to air (from N-fertiliser application)*
- 5004       • *N<sub>2</sub>O, to air (direct and indirect) (from N-fertiliser application)*
- 5005       • *CO<sub>2</sub>, to air (from lime, urea and urea-compounds application)*
- 5006       • *NO<sub>3</sub>, to water unspecified (leaching from N-fertiliser application)*
- 5007       • *PO<sub>4</sub>, to water unspecified or freshwater (leaching and run-off of soluble phosphate from P-fertiliser application)*
- 5008
- 5009       • *P, to water unspecified or freshwater (soil particles containing phosphorous, from P-fertiliser application).*
- 5010

5011       *The LCI for P emissions should be modelled as the amount of P emitted to water after run-off and the emission compartment 'water' shall be used. When this amount is not available, the LCI may be modelled as the amount of P applied on the agricultural field (through manure or fertilisers) and the emission compartment 'soil' shall be used. In this case, the run-off from soil to water is part of the impact assessment method.*

5012

5013

5014

5015

5016       *The LCI for N emissions shall be modelled as the amount of emissions after it leaves the field (soil) and ending up in the different air and water compartments per amount of fertilisers applied. N emissions to soil shall not be modelled. The nitrogen emissions shall be calculated from Nitrogen applications of the farmer on the field and excluding external sources (e.g. rain deposition).*

5017

5018

5019

5020       [For nitrogen based fertilisers, the PEFCR shall describe the LCI model to be used. The Tier 1 emissions factors of IPCC 2006 should be used. A more comprehensive Nitrogen field model can be used by the PEFCR provided (i) it covers at least the emissions requested above, (ii) N is balanced in inputs and outputs and (iii) it is described in a transparent way.]

5021

5022

5023

5024       **Table B. 12. Parameters to be used when modelling nitrogen emission in soil.**

<b>Emission</b>	<b>Compartment</b>	<b>Value to be applied</b>
<i>N<sub>2</sub>O (synthetic fertiliser and manure; direct and indirect)</i>	<i>Air</i>	<i>0.022 kg N<sub>2</sub>O/ kg N fertilizer applied</i>
<i>NH<sub>3</sub> (synthetic fertiliser)</i>	<i>Air</i>	<i>kg NH<sub>3</sub>= kg N * FracGASF= 1*0.1* (17/14)= 0.12 kg NH<sub>3</sub>/ kg N fertilizer applied</i>
<i>NH<sub>3</sub> (manure)</i>	<i>Air</i>	<i>kg NH<sub>3</sub>= kg N*FracGASF= 1*0.2* (17/14)= 0.24 kg NH<sub>3</sub>/ kg N manure applied</i>
<i>NO<sub>3</sub><sup>-</sup> (synthetic fertiliser and manure)</i>	<i>Water</i>	<i>kg NO<sub>3</sub><sup>-</sup>= kg N*FracLEACH = 1*0.3*(62/14) = 1.33 kg NO<sub>3</sub><sup>-</sup>/ kg N applied</i>
<i>P based fertilisers</i>	<i>Water</i>	<i>0.05 kg P/ kg P applied</i>

5025 [For TS, note that the values provided shall not be used to compare different types of synthetic fertilizers.  
5026 More detailed modelling shall be used for that.]

5027 *Heavy metal emissions from field inputs shall be modelled as emission to soil and/or leaching or erosion to*  
5028 *water. The inventory to water shall specify the oxidation state of the metal (e.g., Cr+3, Cr+6). As crops*  
5029 *assimilate part of the heavy metal emissions during their cultivation clarification is needed on how to model*  
5030 *crops that act as a sink. The following modelling approach shall be used:*

5031 [The TS shall select one of the two modelling approaches to be used]

- 5032 ● *The final fate of the heavy metals elementary flows are not further considered within the system*  
5033 *boundary: the inventory does not account for the final emissions of the heavy metals and therefore*  
5034 *shall not account for the uptake of heavy metals by the crop. For example, heavy metals in*  
5035 *agricultural crops cultivated for human consumption end up in the plant. Within the EF context*  
5036 *human consumption is not modelled, the final fate is not further modelled and the plant acts as a*  
5037 *heavy metal sink. Therefore, the uptake of heavy metals by the crop shall not be modelled.*
- 5038 ● *The final fate (emission compartment) of the heavy metal elementary flows is considered within the*  
5039 *system boundary: the inventory does account for the final emissions (release) of the heavy metals in*  
5040 *the environment and therefore shall also account for the uptake of heavy metals by the crop. For*  
5041 *example, heavy metals in agricultural crops cultivated for feed will mainly end up in the animal*  
5042 *digestion and used as manure back on the field where the metals are released in the environment*  
5043 *and their impacts are captured by the impact assessment methods. Therefore the inventory of the*

5044 *agricultural stage shall account for the uptake of heavy metals by the crop. A limited amount ends*  
 5045 *up in the animal (= sink), which may be neglected for simplification.*

5046 *Methane emissions from rice cultivation shall be included on basis of IPCC 2006 calculation rules.*

5047 *Drained peat soils shall include carbon dioxide emissions on the basis of a model that relates the drainage*  
 5048 *levels to annual carbon oxidation.*

5049 *The following activities shall be included* [The TS shall select what shall be included following the PEFCR  
 5050 *guidelines]:*

- 5051 ● *Input of seed material (kg/ha)*
- 5052 ● *Input of peat to soil (kg/ha + C/N ratio)*
- 5053 ● *Input of lime (kg CaCO<sub>3</sub>/ha, type)*
- 5054 ● *Machine use (hours, type) (to be included if there is high level of mechanisation)*
- 5055 ● *Input N from crop residues that stay on the field or are burned (kg residue + N content/ha)*
- 5056 ● *Crop yield (kg/ha)*
- 5057 ● *Drying and storage of products*
- 5058 ● *Field operations through ...[to be filled in]*

5059 **B.6.3 Manufacturing**

5060 [The PEFCR shall list all technical requirements and assumptions to be used by the applicant. Furthermore,  
 5061 it shall list all processes taking place in this life cycle stage, according to the table provided below. The table  
 5062 may be adapted by the TS as appropriate.]

5063 **Table B. 13. Manufacturing (capitals indicate those processes expected to be run by the company)**

Name of the process *	Unit of measurement (output)	Default amount per FU	Default dataset to be used	Dataset source	UUID	Default DQR				Most relevant process [Y/N]
						P	Ti <sub>R</sub>	G <sub>R</sub>	Te <sub>R</sub>	

5064 [Please write in CAPITAL LETTERS the name of those processes expected to be run by the company]

5065 *The applicant shall report the DQR values (for each criterion + total) for all the datasets used.*

5066 [PEFCRs that include reusable packaging shall account for the additional energy and resource used for  
 5067 cleaning, repairing or refilling.]

5068 *The waste of products used during the manufacturing shall be included in the modelling.* [Default loss rates  
 5069 per type of product and how these shall be included in the reference flow shall be described.]

5070 **B.6.4 Distribution stage**

5071 *The transport from factory to final client (including consumer transport) shall be modelled within this life*  
 5072 *cycle stage. The final client is defined as ... [to be filled in].*

5073 *In case supply-chain-specific information is available for one or several transport parameters, they may be*  
 5074 *applied following the Data Needs Matrix.*

5075 [A default transport scenario shall be provided by the TS in the PEFCR. In case no PEFCR-specific transport  
 5076 scenario is available the transport scenario provided in the guidance shall be used as a basis together with  
 5077 (i) a number of PEFCR-specific ratios, (ii) PEFCR-specific utilisation ratios for truck transport, and (iii) PEFCR-  
 5078 specific allocation factor for consumer transport. For reusable products, the return transport from  
 5079 retail/DC to factory shall be added in the transport scenario. For cooled or frozen products, the default  
 5080 truck/van transport processes should be changed. The PEFCR shall list all processes taking place in scenario  
 5081 (according to the model of the RP) using the table below. The table may be adapted by the TS as  
 5082 appropriate]

5083 **Table B. 14. Distribution (capitals indicate those processes expected to be run by the company)**

Processes name*	Unit of measurement (output)	Default (per FU)			Default dataset	Dataset source	UID	Default DQR				Most relevant [Y/N]
		Distance	Utilisation ratio	Empty return				P <sub>R</sub>	Ti <sub>R</sub>	G <sub>R</sub>	Te <sub>R</sub>	

5084 [Please write in CAPITAL LETTERS the name of those processes expected to be run by the company]

5085 *The applicant shall report the DQR values (for each criterion + total) for all the datasets used.*



5086 *The waste of products during the distribution and retail shall be included in the modelling.* [Default loss  
 5087 rates per type of product and how these shall be included in the reference flow shall be described. The  
 5088 PEFCR shall follow the guidance Annex F in case no PEFCR-specific information is available.]

5089 **B.6.5 Use stage [to be included if applicable]**

5090 [The PEFCR shall provide a clear description of the use stage and list all processes taking place (according to  
 5091 the model of the RP) according to the table provided below. The table may be adapted by the TS as  
 5092 appropriate]

5093 **Table B. 15. Use stage (capitals indicate those processes expected to be run by the company)**

Name of the process*	Unit of measurement (output)	Default amount per FU	Default dataset to be used	Dataset source	UUID	Default DQR				Most relevant process [Y/N]
						P	TiR	GR	TeR	

5094 [Please write in CAPITAL LETTERS the name of those processes expected to be run by the company]

5095 *The applicant shall report the DQR values (for each criterion + total) for all the datasets used.*

5096 [In this section the PEFCR shall also list all technical requirements and assumptions to be used by the  
 5097 applicant. The PEFCR shall state if a delta approach is used for certain processes. In case the Delta approach  
 5098 is used, the PEFCR shall state the minimum consumption (reference) to be used when calculating the  
 5099 additional consumption allocated to the product.]

5100 *For the use stage the consumption grid mix shall be used. The electricity mix shall reflect the ratios of sales*  
 5101 *between EU countries/regions. To determine the ratio a physical unit shall be used (e.g. number of pieces or*  
 5102 *kg of product). Where such data are not available, the average EU consumption mix (EU-28 +EFTA), or*  
 5103 *region representative consumption mix, shall be used.*

5104 *The waste of products during the use stage shall be included in the modelling.* [Default loss rates per type of  
 5105 product and how these shall be included in the reference flow shall be described. The PEFCR shall follow  
 5106 the guidance Annex F in case no PEFCR-specific information is available.]

5107 **B.6.6 End of life [to be included if applicable]**

5108 *The End-of-Life stage is a life cycle stage that in general includes the waste of the product in scope, such as*  
 5109 *the food waste, primary packaging, or the product left at its end of use.*

5110 [The PEFCR shall list all technical requirements and assumptions to be used by the applicant. Furthermore,  
 5111 it shall list all processes taking place in this life cycle stage (according to the model of the RP) according to  
 5112 the table provided below. The table may be adapted by the TS as appropriate. Please note that the  
 5113 transport from collection place to EOL treatment is included in the landfill, incineration and recycling  
 5114 datasets tendered by the EC. However, there might be some cases, where additional default transport data  
 5115 is needed and thus shall be included here. The guidance provide default values to be used in case no better  
 5116 data is available.]

5117 **Table B. 16. End of Life (capitals indicate those processes expected to be run by the company)**

Name of the process*	Unit of measurement (output)	Default amount per FU	Default dataset to be used	Dataset source	UUID	Default DQR				Most relevant process [Y/N]
						P	Ti <sub>R</sub>	G <sub>R</sub>	Te <sub>R</sub>	

5118 [Please write in CAPITAL LETTERS the name of those processes expected to be run by the company]

5119 *The applicant shall report the DQR values (for each criterion + total) for all the datasets used.*

5120 *The end of life shall be modelled using the formula and guidance provided in chapter 'End of life modelling'*  
 5121 *of this PEFCR together with the default parameters listed in the table below.*

5122 *Before selecting the appropriate R<sub>2</sub> value, an evaluation for recyclability of the material shall be done and*  
 5123 *the PEF study shall include a statement on the recyclability of the materials/products. The statement on the*  
 5124 *recyclability shall be provided together with an evaluation for recyclability that includes evidence for the*  
 5125 *following three criteria (as described by ISO 14021:1999, section 7.7.4 'Evaluation methodology'):*

- 5126 1. *The collection, sorting and delivery systems to transfer the materials from the source to the*  
 5127 *recycling facility are conveniently available to a reasonable proportion of the purchasers, potential*  
 5128 *purchasers and users of the product;*
- 5129 2. *The recycling facilities are available to accommodate the collected materials;*
- 5130 3. *Evidence is available that the product for which recyclability is claimed is being collected and*  
 5131 *recycled.*

5132 *Point 1 and 3 can be proven by recycling statistics (country specific) derived from industry associations or*  
5133 *national bodies. Approximation to evidence at point 3 can be provided by applying for example the design*  
5134 *for recyclability evaluation outlined in EN 13430 Material recycling (Annexes A and B) or other sector-*  
5135 *specific recyclability guidelines if available<sup>100</sup>.*

5136 *Following the evaluation for recyclability, the appropriate  $R_2$  values (supply-chain specific or default) shall*  
5137 *be used. If one criteria is not fulfilled or the sector-specific recyclability guidelines indicate a limited*  
5138 *recyclability an  $R_2$  value of 0% shall be applied.*

5139 *Company-specific  $R_2$  values (measured at the output of the recycling plant) shall be used when available. If*  
5140 *no company-specific values are available and the criteria for evaluation of recyclability are fulfilled (see*  
5141 *below), application-specific  $R_2$  values shall be used as listed in the table below,*

- 5142 ● *If an  $R_2$  value is not available for a specific country, then the European average shall be used.*
- 5143 ● *If an  $R_2$  value is not available for a specific application, the  $R_2$  values of the material shall be used*  
5144 *(e.g. materials average).*
- 5145 ● *In case no  $R_2$  values are available,  $R_2$  shall be set equal to 0 or new statistics may be generated in*  
5146 *order to assign an  $R_2$  value in the specific situation.*

5147 *The applied  $R_2$  values shall be subject to the PEF study verification.*

5148  
5149 [The PEFCR shall list in a table all the parameters to be used by the applicant to implement the CFF,  
5150 distinguishing between those who have a fixed value (to be provided in the same Table; from the guidance  
5151 or PEFCR-specific) and those who are PEF study-specific (including  $R_2$ , A,  $E_{\text{recyclingEOL}}$ , ...). Furthermore, the  
5152 PEFCR shall include additional modelling rules derived from the guidance if applicable (e.g., on packaging).  
5153 Within this table, the B value shall be equal to 0 as default.]

5154 [PEFCRs that include reusable packaging shall include the following: “The reuse rate determines the  
5155 quantity of packaging material (per product sold) to be treated at end of life. The amount of packaging  
5156 treated at end of life shall be calculated by dividing the actual weight of the packaging by the number of  
5157 times this packaging was reused.”]

## 5158 **B.7 PEF results**

### 5159 **B.7.1 Benchmark values**

5160 [Here the TS shall report the results of the benchmark for each representative product. The results shall be  
5161 provided characterised, normalised, and weighted (as absolute values), each in a different table, according  
5162 to the template provided below]

5163 **Table [introduce number of table]** - *Characterised benchmark values for [introduce name of the*  
5164 *representative product]*

---

<sup>100</sup> E.g. the EPBP design guidelines (<http://www.epbp.org/design-guidelines>), or Recyclability by design (<http://www.recoup.org/>)

Impact category	Unit	Life cycle excl. use stage	Use stage
<b>Climate change, total</b>	kg CO <sub>2</sub> eq		
<i>Climate change - biogenic</i>			
<i>Climate change – land use and land transformation</i>			
<b>Ozone depletion</b>	kg CFC-11 eq		
<b>Particulate matter</b>	disease incidence		
<b>Ionising radiation, human health</b>	kBq U <sup>235</sup> eq		
<b>Photochemical ozone formation, human health</b>	kg NMVOC eq		
<b>Acidification</b>	mol H <sup>+</sup> eq		
<b>Eutrophication, terrestrial</b>	mol N eq		
<b>Eutrophication, freshwater</b>	kg P eq		
<b>Eutrophication, marine</b>	kg N eq		
<b>Land use</b>	Dimensionless (pt)		
<b>Water use</b>	m <sup>3</sup> world eq		
<b>Resource use, minerals and metals</b>	kg Sb eq		
<b>Resource use, fossils</b>	MJ		

5165

5166 **Table** [introduce number of table] - *Normalised benchmark values for* [introduce name of the  
5167 representative product]

Impact category	Life cycle excl. use stage	Use stage
<b>Climate change, total</b>		
<b>Ozone depletion</b>		
<b>Particulate matter</b>		
<b>Ionising radiation, human health</b>		
<b>Photochemical ozone formation, human health</b>		
<b>Acidification</b>		
<b>Eutrophication, terrestrial</b>		
<b>Eutrophication, freshwater</b>		
<b>Eutrophication, marine</b>		
<b>Land use</b>		
<b>Water use</b>		
<b>Resource use, minerals and metals</b>		
<b>Resource use, fossils</b>		

5168 **Table** [introduce number of table] - *Weighted benchmark values for* [introduce name of the representative  
5169 product]

Impact category	Life cycle excl. use stage	Use stage
Climate change, total		
Ozone depletion		
Particulate matter		
Ionising radiation, human health		
Photochemical ozone formation, human health		
Acidification		
Eutrophication, terrestrial		
Eutrophication, freshwater		
Eutrophication, marine		
Land use		
Water use		
Resource use, minerals and metals		
Resource use, fossils		
<b>Total result</b>		

5170

5171 **B.7.2 PEF profile**

5172 *The applicant shall calculate the PEF profile of its product in compliance with all requirements included in*  
5173 *this PEFCR. The following information shall be included in the PEF report:*

- 5174 - *full life cycle inventory;*
- 5175 - *characterised results in absolute values, for all impact categories (including toxicity; as a table);*
- 5176 - *normalised and weighted result in absolute values, for all impact categories (including toxicity; as a*  
5177 *table);*
- 5178 - *the aggregated single score in absolute values*

5179 *Together with the PEF report, the applicant shall develop an aggregated EF-compliant dataset of its product*  
5180 *in scope. This dataset shall be made available on the EF node ( <http://eplca.jrc.ec.europa.eu/EF-node/>). The*  
5181 *disaggregated version may stay confidential.*

5182 **B.7.3 Additional technical information**

5183 [The TS shall list the additional technical information to be reported]:

- 5184 -

5185

5186 [For Intermediate products:]

- 5187 - *The biogenic carbon content at factory gate (physical content and allocated content) shall be*  
5188 *reported. If derived from native forest, it shall report that the corresponding carbon emissions shall*  
5189 *be modelled with the elementary flow '(land use change)'.*
- 5190 - *The recycled content (R1) shall be reported.*

5191 - Results with application-specific A-values, if relevant.

#### 5192 **B.7.4 Additional environmental information**

5193 [Specify which additional environmental information shall/should be reported (provide units). Avoid if  
5194 possible the use of should. Reference all methods used to report additional information.]

5195 *Biodiversity is considered as relevant for this PEFCR:... [YES/No]*

5196 [If biodiversity is relevant, the PEFCR shall describe how biodiversity impacts shall be assessed by the  
5197 applicant.]

#### 5198 **B.7.5 Other impact results**

5199 [This chapter is optional and may only be included in the PEFCR when the TS decides to add one or two  
5200 toxicity impact categories to the list of most relevant impact categories. In this case, the TS may decide to  
5201 display here the characterised results from the selected ICs toxicity.]

#### 5202 **B.8 Verification**

5203 *The verification of an EF study/report carried out in compliance with this PEFCR shall be done according to*  
5204 *all the general requirements included in Section 8 of the PEFCR Guidance [enter version number] and the*  
5205 *requirements listed below.*

5206  
5207 *The verifier(s) shall verify that the EF study is conducted in compliance with this PEFCR.*  
5208 *These requirements will remain valid until an EF verification scheme is adopted at European level or*  
5209 *alternative verification approaches applicable to EF studies/report are included in existing or new policies.*

5210  
5211 *The verifier(s) shall validate the accuracy and reliability of the quantitative information used in the*  
5212 *calculation of the study. As this can be highly resource intensive, the following requirements shall be*  
5213 *followed:*

- 5214 • *the verifier shall check if the correct version of all impact assessment methods was used. For each of*  
5215 *the most relevant impact categories, at least 50% of the characterisation factors (for each of the*  
5216 *most relevant EF impact categories) shall be verified, while all normalisation and weighting factors*  
5217 *of all ICs shall be verified. In particular, the verifier shall check that the characterisation factors*  
5218 *correspond to those included in the EF impact assessment method the study declares compliance*  
5219 *with<sup>101</sup>;*
- 5220 • *all the newly created datasets shall be checked on their EF compliancy (for the meaning of EF*  
5221 *compliant datasets refer to Annex H of the Guidance). All their underlying data (elementary flows,*  
5222 *activity data and sub processes) shall be validated. The aggregated EF-compliant dataset of the*  
5223 *product in scope (meaning, the EF study) is available on the EF node*  
5224 *(<http://eplca.jrc.ec.europa.eu/EF-node/>);*

---

<sup>101</sup> Available at: <http://eplca.jrc.ec.europa.eu/LCDN/developer.xhtml>

- 5225 • for at least 70% of the most relevant processes in situation 2 option 2 of the DNM, 70% of the  
5226 underlying data shall be validated. The 70% data shall including all energy and transport sub  
5227 processes for those in situation 2 option 2;
- 5228 • for at least 60% of the most relevant processes in situation 3 of the DNM, 60% of the underlying  
5229 data shall be validated;
- 5230 • for at least 50% of the other processes in situation 1, 2 and 3 of the DNM, 50% of the underlying  
5231 data shall be validated.

5232

5233 *In particular, it shall be verified for the selected processes if the DQR of the process satisfies the minimum*  
5234 *DQR as specified in the DNM.*

5235 *The selection of the processes to be verified for each situation shall be done ordering them from the most*  
5236 *contributing to the less contributing one and selecting those contributing up to the identified percentage*  
5237 *starting from the most contributing ones. In case of non-integer numbers, the rounding shall be made*  
5238 *always considering the next upper integer.*

5239 *These data checks shall include, but should not be limited to, the activity data used, the selection of*  
5240 *secondary sub-processes, the selection of the direct elementary flows and the CFF parameters. For example,*  
5241 *if there are 5 processes and each one of them includes 5 activity data, 5 secondary datasets and 10 CFF*  
5242 *parameters, then the verifier(s) has to check at least 4 out of 5 processes (70%) and, for each process, (s)he*  
5243 *shall check at least 4 activity data (70% of the total amount of activity data), 4 secondary datasets (70% of*  
5244 *the total amount of secondary datasets), and 7 CFF parameters (70% of the total amount of CFF*  
5245 *parameters), i.e. the 70% of each of data that could be possible subject of check.*

5246 *The verification of the EF report shall be carried out by randomly checking enough information to provide*  
5247 *reasonable assurance that the EF report fulfils all the conditions listed in section 8 of the PEFCR Guidance.*

5248 [The PEFCR may specify additional requirements for the verification that should be added to the minimum  
5249 requirements stated in this document].

## 5250 **B.9 References**

5251 [List the references used in the PEFCR.]

5252

5253

5254

5255

5256 **ANNEX B.1 – List of EF normalisation and weighting factors**

5257 Global normalisation factors are applied within the EF. The normalisation factors as the global impact per  
 5258 person are used in the EF calculations.

Impact category	Unit	Normalisation factor	Normalisation factor per person	Impact assessment robustness	Inventory coverage completeness	Inventory robustness	Comment
Climate change	kg CO <sub>2</sub> eq	5.35E+13	7.76E+03	I	II	I	
Ozone depletion	kg CFC-11 eq	1.61E+08	2.34E-02	I	III	II	
Human toxicity, cancer	CTUh	2.66E+05	3.85E-05	II/III	III	III	
Human toxicity, non-cancer	CTUh	3.27E+06	4.75E-04	II/III	III	III	
Particulate matter	disease incidence	4.39E+06	6.37E-04	I	I/II	I /II	NF calculation takes into account the emission height both in the emission inventory and in the impact assessment.
Ionising radiation, human health	kBq U <sup>235</sup> eq	2.91E+13	4.22E+03	II	II	III	
Photochemical ozone formation, human health	kg NMVOC eq	2.80E+11	4.06E+01	II	III	I/II	
Acidification	mol H <sup>+</sup> eq	3.83E+11	5.55E+01	II	II	I/II	
Eutrophication, terrestrial	mol N eq	1.22E+12	1.77E+02	II	II	I/II	



<b>Eutrophication, freshwater</b>	kg P <sub>eq</sub>	1.76E+10	2.55E+00	II	II	III	
<b>Eutrophication, marine</b>	kg N <sub>eq</sub>	1.95E+11	2.83E+01	II	II	II/III	
<b>Land use</b>	pt	9.20E+15	1.33E+06	III	II	I I	The NF is built by means of regionalised CFs.
<b>Ecotoxicity, freshwater</b>	CTUe	8.15E+13	1.18E+04	II/III	III	III	
<b>Water use</b>	m <sup>3</sup> world <sub>eq</sub>	7.91E+13	1.15E+04	III	I	II	The NF is built by means of regionalised CFs.
<b>Resource use, fossils</b>	MJ	4.50E+14	6.53E+04	III	I	II	
<b>Resource use, minerals and metals</b>	kg Sb <sub>eq</sub>	3.99E+08	5.79E-02	III			

5259

5260 **Weighting factors for Environmental Footprint**

	Aggregated weighting set	Robustness factors	Calculation	Final weighting factors
	(50:50)	(scale 1-0.1)		
<b>WITHOUT TOX CATEGORIES</b>	A	B	C=A*B	C scaled to 100
Climate change	15.75	0.87	13.65	<b>22.19</b>
Ozone depletion	6.92	0.6	4.15	<b>6.75</b>
Particulate matter	6.77	0.87	5.87	<b>9.54</b>
Ionizing radiation, human health	7.07	0.47	3.3	<b>5.37</b>
Photochemical ozone formation, human health	5.88	0.53	3.14	<b>5.1</b>
Acidification	6.13	0.67	4.08	<b>6.64</b>
Eutrophication, terrestrial	3.61	0.67	2.4	<b>3.91</b>
Eutrophication, freshwater	3.88	0.47	1.81	<b>2.95</b>
Eutrophication, marine	3.59	0.53	1.92	<b>3.12</b>
Land use	11.1	0.47	5.18	<b>8.42</b>
Water use	11.89	0.47	5.55	<b>9.03</b>
Resource use, minerals and metals	8.28	0.6	4.97	<b>8.08</b>
Resource use, fossils	9.14	0.6	5.48	<b>8.92</b>

5261

- 5262 **ANNEX B.2 - check-list for the PEF study**
- 5263 [The PEFCR shall report as an annex the checklist listing all the items that shall be included in PEF studies.
- 5264 The following template shall be used. The item already included are mandatory for every PEFCR, in addition
- 5265 each TS can decide to add additional points to the checklist.]
- 5266 *Each PEF study shall include this annex, completed with all the requested information.*
- 5267

<b>ITEM</b>	<b>Included in the study (Y/N)</b>	<b>Section</b>	<b>Page</b>
[This column shall list all the items that shall be included in PEF studies. One item per row shall be listed. This column shall be completed by the TS]	[The PEF study shall indicate if the item is included or not in the study]	[The PEF study shall indicate in which section of the study the item is included ]	[The PEF study shall indicate in which page of the study the item is included ]
<i>Summary</i>			
<i>General information about the product</i>			
<i>General information about the company</i>			
<i>Diagram with system boundary and indication of the situation according to DNM</i>			
<i>List and description of processes included in the system boundaries</i>			

<b>ITEM</b>	<b>Included in the study (Y/N)</b>	<b>Section</b>	<b>Page</b>
<i>List of co-products, by-products and waste</i>			
<i>List of activity data used</i>			
<i>List of secondary datasets used</i>			
<i>Data gaps</i>			
<i>Assumptions</i>			
<i>Scope of the study</i>			
<i>(sub)category to which the product belongs</i>			
<i>DQR calculation of each dataset used for the most relevant processes and the new ones created.</i>			
<i>DQR (of each criteria and total) of the study</i>			

5268

5269

5270 **ANNEX B.3 - Critical review report of the PEFCR**  
5271 [Insert here the critical review panel report of the PEFCR, including all findings of the review process and  
5272 the actions taken from TS to answer the comments of the reviewers]

5273

5274 **ANNEX B.4 - Other Annexes**  
5275 [The TS can decide to add other Annexes that are considered important]

5276

5277

5278 **Annex C – List of default values for A, R<sub>1</sub>,**  
5279 **R<sub>2</sub>, R<sub>3</sub> and Q<sub>s</sub>/Q<sub>p</sub>**

5280 *The list of default values for A, R<sub>1</sub> and R<sub>2</sub> is available in the Excel file*  
5281 *“CFF\_Default\_Parameters\_March2018.xlsx” downloadable at*  
5282 [http://ec.europa.eu/environment/eussd/smgp/PEFCR\\_OEFSR.htm](http://ec.europa.eu/environment/eussd/smgp/PEFCR_OEFSR.htm).

5283

5284

5285

5286 **Annex D – Background information to**  
 5287 **calculate R2 for packaging materials**

5288  
 5289 *The table D.1 below presents per packaging sector (i) the data source to calculate R2, (ii) where in the*  
 5290 *collection-recycling scheme these data are collected (see Figure 9 in section 7.18.7.4) and (iii) the applied*  
 5291 *correction factor towards the output of the recycling process.*

5292  
 5293 **Table D.1** - Recycling rates for different packaging categories, including the source, the data collection  
 5294 point and the recommended correction factor. Please note that the data sources used for the correction  
 5295 factor are not always reviewed reports but may also be surveys or standards.

Packaging sector	Data source	Reference year	Data collection point (Figure 9)	Correction factor*	Source for correction factor
Liquid beverage carton <sup>b</sup>	ACE	2014	8	Liquid packaging board: 92% Aluminium foil: 97% Plastic: 72%	<u>No data source:</u> The correction factors of paper and cardboard, aluminium cans, and generic plastics are recommended as proxy.
Aluminium cans	EA, + bottom ashes <sup>o</sup>	2013	6 <sup>+</sup>	97%	Reviewed LCA: <a href="http://european-aluminium.eu/media/1329/environmental-profile-report-for-the-european-aluminium-industry.pdf">http://european-aluminium.eu/media/1329/environmental-profile-report-for-the-european-aluminium-industry.pdf</a> (p58); Boin and Bertram 2005, Melting Standardized Aluminum Scrap: A Mass Balance Model for Europe.
PET bottle	PETCORE	2014	2	73%	<u>Survey:</u> Post-consumer PET recycling in Europe 2014 and prospects to 2019. Prepared on behalf of PETCORE Europe by PCI Ltd. 2015. <a href="http://www.pcipetpackaging.co.uk/">http://www.pcipetpackaging.co.uk/</a>
Container	FEVE	2013	8	90%	Reviewed LCA: Life Cycle

Packaging sector	Data source	Reference year	Data collection point (Figure 9)	Correction factor*	Source for correction factor
glass					Assessment of Container Glass in Europe (Prepared on behalf of FEVE by RDC Environment), 2016. <a href="http://feve.org/new-life-cycle-assessment-proves-industry-success-reducing-environmental-footprint/">http://feve.org/new-life-cycle-assessment-proves-industry-success-reducing-environmental-footprint/</a>
Steel for packaging	APEAL, bottom ashes <sup>p</sup>	+ 2013	6 <sup>†</sup>	98%	<u>Standard</u> : Canadian standards' Life cycle assessment of auto parts. <a href="http://shop.csa.ca/en/canada/life-cycle-assessment/spe-14040-14/inv/27036702014">http://shop.csa.ca/en/canada/life-cycle-assessment/spe-14040-14/inv/27036702014</a>
Generic plastic packaging	PlasticsEurope	2014	8	73%	<u>LCA report</u> : Increased EU Plastics Recycling Targets: Environmental, Economic and Social Impact Assessment. Prepared by Deloitte on behalf of Plastic Recyclers Europe. 2015 (See Table 7, value of 2012).
Paper and cardboard	CEPI	2014	8	92%	<u>Reviewed LCA</u> : European Database for Corrugated Board Life Cycle Studies" (2015, FEFCO, CE Containerboard)

5296 \*Expressed as percentage of material (%) at the output of the recycling plant when considering a 100%  
5297 input at data collection point. The proposed correction factors are sector specific and to be used for  
5298 correcting the European average and country specific recycling rates. It is recognized that this is an over  
5299 simplification as the correction depends on the installations and market in place. However, the data  
5300 available today asks for this simplification. Some values are rounded.

5301 <sup>p</sup>The recycling rates for aluminium cans and steel for packaging include bottom ash recovery.

5302 <sup>†</sup>R<sub>2</sub> provided by the national collection systems excludes impurities from the overall mass estimate of metal  
5303 packaging. Impurities are excluded from the correction factor.

5304 <sup>b</sup> For liquid beverage carton three different material flows leave the recycling process at level 5. Therefore,  
5305 three correction factors are introduced, each to be used with the respective material flow.

5306

# 5307 Annex E – PEFCR supporting study 5308 template

5309 **IMPORTANT:** The supporting studies shall be based on a version of the draft PEFCR that includes all the  
5310 information that a person not involved in its drafting would need to carry out the study. If the version of  
5311 the draft PEFCR approved by the Steering Committee is missing such information (e.g. the list of  
5312 secondary datasets to be used, the tables to recalculate the DQR values for the secondary datasets, or  
5313 other information related to the application of the Data Need Matrix), than the TS shall make available  
5314 to the companies performing the supporting study an updated version of the PEFCR. It is important to  
5315 send this version also to the Commission as this will be one of the documents used by the verifiers for  
5316 their checks.

5317

## 5318 General guidelines and instructions

5319

5320 The information included in this template is what the Commission expects to find in a supporting study.  
5321 However, the use of a different template (with different chapters) is allowed provided that the information  
5322 listed in this template is available in the report.

5323

- 5324 • Any information written in the referenced PEFCR shall not be repeated in this report.
- 5325 • Any additional instructions (e.g., impact assessments methods used, default background datasets  
5326 and parameters used) shall be included in the PEFCR and not in the supporting study report.
- 5327 • In principle no deviations from the draft PEFCR are allowed. In case of deviation, the details about  
5328 the deviation shall be described in the related chapter (meaning, when there is a deviation on the  
5329 scope, this shall be described in the scope chapter).
- 5330 • The supporting study report (including confidential information) will be accessed only by the  
5331 external verifiers (Ernst & Young), the PEFCR reviewers, and the EF Team in DG ENV and JRC IES.
- 5332 • The supporting study report (including confidential information) shall remain confidential, unless  
5333 differently agreed by the company performing the study. The company performing the study can  
5334 grant access to other stakeholders upon request.
- 5335 • Beside the confidential report (this template in its full version), a second report shall be produced  
5336 that describes the main outcomes of the PEFCR supporting study without disclosing confidential  
5337 information. For this, chapter C.0 and C.9 can be removed from the report, while chapter C.6 on  
5338 the results can be replaced by a non-confidential summary. This second report will be made  
5339 available to the Technical Secretariat, the Technical Advisory Board and the Steering Committee.
- 5340 • The second report (without confidential information) or a condensed version thereof can be used  
5341 in the communication phase. If the communication phase concerns real life tests, then the  
5342 characterized results shall be available to the public at least for the Impact Categories identified as  
5343 “most relevant” in the PEFCR.

5344

5345



5346 Product Environmental Footprint

5347 Supporting Study

5348 [Insert product name here]

5349

## 5350 E.1 Summary

5351 [The summary includes the following elements:

- 5352 • The goal and scope of the supporting study
- 5353 • Relevant statements about data quality, assumptions, value judgments and limitations
- 5354 • The main results from the impact assessment
- 5355 • Recommendations made and conclusions drawn

5356 To the extent possible the Summary should be written with a non-technical audience in mind and should  
5357 not be longer than 3-4 pages.

## 5358 E.2 General

5359 [The information below should ideally be placed on the front-page of the study:

- 5360 • Name of the product (including a photo)
- 5361 • Product identification (e.g. model number)
- 5362 • Product classification (CPA) based on the latest CPA list version available
- 5363 • Company presentation (name, geographic location)
- 5364 • Date of publication of supporting study (write out the date e.g. 25 June 2015 to avoid confusion of  
5365 the date format)
- 5366 • Geographic validity of the supporting study (countries where the product is consumed/sold)
- 5367 • List the reference PEFCR the supporting study is in conformance with (incl. version number)
- 5368 • An indication whether this report underwent a critical review process (critical review of the  
5369 supporting study is not a mandatory requirement)]

5370

5371 [The following statements shall be included:

5372 *"The current document endeavours to be compliant with the requirements of the 'Product Environmental*  
5373 *Footprint (PEF) Guide' (Annex II to Recommendation (2013/179/EU), the "Guidance for the implementation*  
5374 *of the EU PEF during the EF Pilot Phase" (version no. 5.0.) and the PEFCR ... add title, version and*  
5375 *publication date".*

5376 *"This study follows / does not follow the requirements regarding data collection and data quality*  
5377 *assessment procedure described in the Annex E of the "Guidance for the implementation of the EU PEF*  
5378 *during the EF Pilot Phase" (version no. 5.0.)]*

5379 [Indicate the level of confidentiality of this report. The report will be public if it is used for communication  
5380 purposes. The paragraph below can be used/adapted.

5381 "This supporting study report (in its full version) is confidential and will be accessed only by the external  
5382 verifiers, the PEFCR reviewers, and the EF Team in DG ENV and JRC IES"]

### 5383 **E.3 Goal of the study**

5384 [The following text shall be included:

5385 "The supporting study is part of the PEF/OEF pilot phase and includes the following goals:

5386 (i) To test the draft PEFCR

5387 (ii) To validate the outcomes of the screening study (such as the selection of relevant impact categories, life  
5388 cycle stages, processes and elementary flows)

5389 (iii) To help defining performance classes where possible

5390 (iv) To perform supplementary analysis listed in the draft PEFCR

5391 (v) To provide results that can be used as the basis for communicating the PEF profile"]

5392

5393 [Include any additional intended application.]

5394

### 5395 **E.4 Scope of the study**

#### 5396 **E.4.1 Functional/declared unit and reference flow**

5397 [Provide the functional unit and reference flow, as described in PEFCR]

#### 5398 **E.4.2 System boundaries**

5399 [This section shall include as a minimum:

5400 • List all attributable life-cycle stages and processes that are part of the product system. The co-  
5401 products, by-products and waste streams of at least the foreground system shall be clearly  
5402 identified.

5403 • Provide a system diagram clearly indicating the system boundaries, the processes that are included  
5404 and those excluded, highlight those activities which falls respectively under situation 1, 2, and 3 of  
5405 the Data Need Matrix<sup>102</sup>, and highlight where primary activity data / primary life cycle inventory  
5406 data is used. In case a supporting study is not implementing Annex E, then the system diagram shall  
5407 clearly indicate which are the processes in the company foreground system (where they have  
5408 operational control) and which are those in the company background system]

#### 5409 **E.4.3 Supplementary analysis**

5410 [Describe any supplementary analysis made, e.g.:

5411 • Scenario sensitivity and uncertainty analysis

5412 • Any other supplementary analysis listed in the draft PEFCR that needs further testing

5413 • The use of impact assessment methods, end of life formulas or datasets other than those  
5414 recommended in the PEFCR]

5415

---

<sup>102</sup> "Guidance for the implementation of the EU PEF during the EF Pilot Phase" (version no. 5.0.),  
Annex E

## 5416 E.5 Life Cycle Inventory analysis

### 5417 E.5.1 Data collection and quality assessment (CONFIDENTIAL IF RELEVANT)

5418 [This section shall include as a minimum:

- 5419 • Description and documentation of all primary data collected<sup>103</sup>
  - 5420 ○ per life cycle stage, e.g., raw material acquisition, production, distribution and storage, use
  - 5421 stage, end of life
  - 5422 ○ list of activity data used
  - 5423 ○ Detailed Bill of Materials/ingredients, including substance names, units and quantities,
  - 5424 including information on grades/purities and other technically and/or environmentally
  - 5425 relevant characterisation of these
  - 5426 ○ List of primary and secondary datasets used
  - 5427 ○ modelling parameters derived from primary data or additional to those described in the
  - 5428 PEFCR (e.g. transportation distance, re-use rate for packaging, etc)
- 5429 • Primary data collection/estimation/calculation procedures
- 5430 • Sources of published literature
- 5431 • Validation of data, including documentation
- 5432 • Justification of allocation procedures used
- 5433 • Report the data quality assessment scoring per process in accordance with the PEFCR
- 5434 requirements<sup>104</sup>]

### 5435 E.5.2 Data gaps

5436 [Specify data gaps and the way in which these gaps were filled. Data gaps could refer to absolute gaps (e.g.  
5437 a dataset or a relevant flow is missing) or it could refer to qualitative data gaps (e.g. a dataset is available  
5438 but its DQR is higher than the minimum requested). This section is preferably empty and if not so, shall give  
5439 recommendations to the final PEFCR development.]

### 5440 E.5.3 Supplementary analysis

5441 [This section shall describe more in detail the supplementary analysis made.

- 5442 • Calculation procedure, assumptions, data sources used, etc.]

5443

---

<sup>103</sup> A description on system level is required, i.e. the whole life cycle be described focussing on the most relevant parts thereof, resulting in e.g. 1-2 page summary. This is what the ILCD format foresees in the field “Technology description including background system”. Generally, it is required a documentation that can directly be used to fill in the respective fields in the ILCD format for the resulting LCI results data set..

<sup>104</sup> At least one supporting study per pilot TS shall apply the data collection and data quality assessment procedure described in the issue paper “Data requirements in Product Environmental Footprint Category Rules (PEFCR)” Version 1.0 12 May 2015. The supporting studies not applying this approach shall follow the baseline approach described in the PEF method, Table 4.

5444 **E.6 Impact assessment results (CONFIDENTIAL IF RELEVANT)**

5445 **E.6.1 PEF results**

5446 [This section shall include as a minimum:

- 5447 • List of the most relevant life cycle stages, processes and elementary flows based on the approach
- 5448 explained in Annex D to this Guidance (using normalization and weighting).
- 5449 • Characterised results per life cycle stage and impact category (all 15 PEF impact categories shall be
- 5450 calculated in the supporting study)
- 5451 • Normalised and weighted results
- 5452 • If included in PEFCR, the required additional environmental information
- 5453 • Limitation of the EF results relative to the defined goal and scope of the PEF study

5454  
5455 In case alternative impact assessment methods and/or normalisation factors and/or weighting systems are  
5456 used, the results shall be calculated separately for the baseline PEF approach and for each of the  
5457 alternative options included.]

5458

5459 **E.6.2 Supplementary analysis**

5460 [This section shall include as a minimum:

- 5461 • Results or conclusions of any supplementary analysis made]

5462

5463 **E.7 Interpreting PEF results**

5464 **E.7.1 PEF results**

5465 [This section shall include as a minimum:

- 5466 • Comparison of the supporting study results against those of the screening study (relevant impact
- 5467 categories, life cycle stages, processes and elementary flows). Differences shall be described and
- 5468 explained;
- 5469 • Any feedback on the draft PEFCR used, including suggestions for improvements, changes,
- 5470 additions;
- 5471 • Assessment of the degree of accuracy (technology, time, geography) for the newly created
- 5472 datasets;
- 5473 • Average DQR for the supporting study (expressed as mathematical average of the DQR of all
- 5474 datasets used in the study);
- 5475 • Uncertainty (at least a qualitative description)].

5476

5477 **E.7.2 Comparison to the benchmark**

5478 [This section shall quantitatively report how the product scores against the benchmark defined at PEFCR  
5479 level (in case no benchmark is explicitly stated in the PEFCR, the characterised results of the representative

5480 product are to be taken as benchmark) and following the same calculation rules. In any case, for the  
5481 supporting studies, this comparison shall be done at least for each of the 16 impact categories<sup>105</sup>.  
5482

### 5483 **E.7.3 Performance class**

5484 [This section should only be filled in case the draft PEFCR includes a proposal for performance classes. If  
5485 that is the case, here it should be reported how the specific product would score].  
5486

### 5487 **Annex I**

5488 [The Annex serves to document supporting elements to the main report which are of a more technical  
5489 nature. It could include:

- 5490 • Bibliographic references;
- 5491 • Additional results that have been shown to be not relevant;
- 5492 • Life Cycle Inventory analysis (optional if considered sensitive and communicated separately in the  
5493 Confidential annex, see below)]  
5494

### 5495 **Annex II: Confidential**

5496 [The Confidential annex is an optional chapter that shall contain all those data (including raw data) and  
5497 information that are confidential or proprietary and cannot be made externally available.]

5498

5499

---

<sup>105</sup> After the supporting studies, for communication purposes, the benchmark per impact category may be defined solely for the selected relevant impact categories.

5500 **Annex F - Default data for modelling the**  
 5501 **use stage**

5502

5503 *The following tables shall be used by the PEFCRs unless better data is available. The data provided is based*  
 5504 *on assumptions, except if specified otherwise.*

<i>Product</i>	<i>Use stage assumptions per product category</i>
<i>Meat, fish, eggs</i>	<i>Chilled storage. Cooking: 10 minutes in frying pan (75% on gas and 25% electricity), 5 gram sunflower oil (incl. its life cycle) per kg product. Dishwashing of frying pan.</i>
<i>Milk</i>	<i>Chilled storage, drunk cold in 200 ml glass (i.e., 5 glasses per L milk), incl. glass life cycle and dishwashing.</i>
<i>Pasta</i>	<i>Per kg pasta cooked in pot with 10 kg water, 10 min boiling (75% on gas and 25% electricity). Boiling phase: 0.18 kWh per kg of water, Cooking phase: 0.05 kWh per minute of cooking.</i>
<i>Frozen dishes</i>	<i>Frozen storage. Cooked in oven 15 minutes at 200°C (incl. a fraction of a stove, a fraction of a baking sheet). Baking sheet rinsing: 5 L water.</i>
<i>Roast and ground coffee</i>	<i>7 g roast and ground coffee per cup        Filter coffee preparation in a filter coffee machine: machine production and end-of-life (1.2 kg, 4380 uses, with 2 cups/use), paper filter (2 g/use), electricity consumption (33 Wh/cup) and water consumption (120 ml/cup).        Machine rinsing/washing: 1 L cold water per use, 2 L hot water per 7 uses, decanter dishwashing (every 7 uses)        Cup (mug) production and end-of-life and dishwashing        Source: based on PEFCR Coffee (draft as of Feb 1, 2015)</i>
<i>Beer</i>	<i>Cooling, drunk in 33 cl glass (i.e., 3 glasses per L beer), glass production, end-of-life and dishwashing. For now: glass is excluded in the beer PEFCR.</i>
<i>Bottled water</i>	<i>Chilled storage. Storage duration: 1 day. 2.7 glasses per L water drunk, 260 gram glass production, end-of-life and dishwashing.</i>
<i>Pet food</i>	<i>Pet food dish production, end-of-life and dishwashing</i>
<i>Goldfish</i>	<i>Electricity and water use and treatment for the aquarium (43 kWh and 468 L per year). Goldfish feed production (1 g/day, assumed 50% fish meal, 50% soybean meal). Lifetime of the goldfish assumed to be 7.5 years.</i>

Product	Use stage assumptions per product category
T-shirt	<p>Washing machine, tumble dryer use and ironing. 52 washing at 41 degree, 5.2 tumble drying (10%) and 30 times ironing per T-shirt.</p> <p>Washing machine: 70 kg, 50% steel, 35% plastic, 5% glass, 5% aluminium, 4% copper, 1% electronics, 1560 cycles (=loads) within its lifetime. 179 kWh and 8700 L water for 220 cycles at 8 kg load (based on <a href="http://www.bosch-home.com/ch/fr/produits/laver-et-s%C3%A9cher/lave-linge/WAQ28320FF.html?source=browse">http://www.bosch-home.com/ch/fr/produits/laver-et-s%C3%A9cher/lave-linge/WAQ28320FF.html?source=browse</a>) being 0.81 kWh and 39.5 L/cycle, as well as 70 ml laundry detergent/cycle.</p> <p>Tumble dryer: 56 kg, same composition share and lifetime as for washing machine assumed. 2.07 kWh/cycle for 8 kg clothes load.</p>
Paint	Paint brush production, sand paper, ... (see PEFCR of paints).
Cell phone	2 kWh/year for the charge, 2 years lifetime.
Laundry detergent	Use of a washing machine (see T-shirt data for washing machine model). 70 ml laundry detergent assumed per cycle, i.e., 14 cycles per kg detergent.
Automotive oil	10% losses during use assessed as hydrocarbons emissions to water.

5505 Default assumptions for storage (always based on assumptions, except if specified otherwise).

Product	Assumptions common for several product categories
Ambient storage (at home)	Ambient storage at home is considered, for the sake of simplification, as having no impact.
Chilled storage (in a fridge, at home)	<p>Storage time: product dependent. As default 7 days storage in fridge (ANIA and ADEME 2012).</p> <p>Storage volume: assumed to be 3x the actual product volume</p> <p>Energy consumption: 0.0037 kWh/L (i.e., "the storage volume") - day (ANIA and ADEME 2012).</p> <p>Fridge production and end-of-life considered (assuming 15 years of lifetime).</p>
Chilled storage (at the pub/restaurant)	The fridge at the pub is assumed to consume 1400 kWh/ yr (Heineken green cooling expert, 2015). 100% of this energy consumption is assumed to be for the cooling of beer. The throughput of the fridge is assumed to be 40hl/ yr. This means 0.35 kWh/ l for pub / supermarket

Product	Assumptions common for several product categories
	<p>cooling for the full storage time.</p> <p>Fridge production and end-of-life considered (assuming 15 years of lifetime).</p>
<p>Frozen storage (in a freezer, at home)</p>	<p>Storage time: 30 days in freezer (based on ANIA and ADEME 2012).</p> <p>Storage volume: assumed to be 2x the actual product volume.</p> <p>Energy consumption: 0.0049 kWh/L (i.e., “the storage volume”) - day (ANIA and ADEME 2012).</p> <p>Freezer production and end-of-life considered (assuming 15 years of lifetime): assumed similar to fridge.</p>
<p>Cooking (at home)</p>	<p>Cooking: 1 kWh/h use (derived from consumptions for induction stove (0.588 kWh/h), ceramic stove (0.999 kWh/h) and electric stove (1.161 kWh/h) all from (ANIA and ADEME 2012).</p> <p>Baking in oven: electricity considered: 1.23 kWh/h (ANIA and ADEME 2012).</p>
<p>Dishwashing (at home)</p>	<p>Dishwasher use: 15 L water, 10 g soap and 1.2 kWh per washing cycle (Kaenzig and Jolliet 2006).</p> <p>Dishwasher production and end-of-life considered (assuming 1500 cycle per lifetime).</p> <p>When dishwashing is done by hand, one assumes an equivalent of 0.5 L of water and 1 g of soap for the value above of 2.5% (with a scaling in terms of water use and soap, using the % above). The water is assumed to be warmed by natural gas, considering a delta T of 40 °C and an efficiency of energy from natural gas heating to water heat of 1/1.25 (meaning that to heat the 0.5 L of water one needs to use <math>1.25 * 0.5 * 4186 * 40 = 0.1</math> MJ of “Heat, natural gas, at boiler”).</p>



5507 **Annex G - Default loss rates per type of**  
 5508 **product**

5509 *Default loss rates per type of product during distribution and at consumer (including restaurant, etc.)*  
 5510 *(assumptions if not specified otherwise). Out of simplification, the values for restaurant are considered the*  
 5511 *same as for consumer at home.*

<i>Retail trade sector</i>	<i>Category</i>	<i>Loss rate (incl. broken products but not products returned to manufacturer) during distribution (overall consolidated value for transportation, storage and retail place)</i>	<i>Loss rate at consumer (including restaurant, etc.)</i>
<i>Food</i>	<i>Fruits and vegetables</i>	<i>10% (FAO 2011)</i>	<i>19% (FAO 2011)</i>
	<i>Meat and meat alternatives</i>	<i>4% (FAO 2011)</i>	<i>11% (FAO 2011)</i>
	<i>Dairy products</i>	<i>0.5% (FAO 2011)</i>	<i>7% (FAO 2011)</i>
	<i>Grain products</i>	<i>2% (FAO 2011)</i>	<i>25% (FAO 2011)</i>
	<i>Oils and fats</i>	<i>1% (FAO 2011)</i>	<i>4% (FAO 2011)</i>
	<i>Prepared/processed meals (ambient)</i>	<i>10%</i>	<i>10%</i>
	<i>Prepared/processed meals (chilled)</i>	<i>5%</i>	<i>5%</i>
	<i>Prepared/processed meals (frozen)</i>	<i>0.6% (primary data based on Picard – oral communication from</i>	<i>0.5% (primary data based on Picard – oral communication from</i>

<i>Retail trade sector</i>	<i>Category</i>	<i>Loss rate (incl. broken products but not products returned to manufacturer) during distribution (overall consolidated value for transportation, storage and retail place)</i>	<i>Loss rate at consumer (including restaurant, etc.)</i>
		<i>Arnaud Brulair)</i>	<i>Arnaud Brulair)</i>
	<i>Confectionery</i>	5%	2%
	<i>Other foods</i>	1%	2%
<i>Beverages</i>	<i>Coffee and tea</i>	1%	5%
	<i>Alcoholic beverages</i>	1%	5%
	<i>Other beverages</i>	1%	5%
<i>Tobacco</i>		0%	0%
<i>Pet food</i>		5%	5%
<i>Live animals</i>		0%	0%
<i>Clothing and textile</i>		10%	0%
<i>Footwear and leather goods</i>		0%	0%
<i>Personal accessories</i>	<i>Personal accessories</i>	0%	0%
<i>Home and professional supplies</i>	<i>Home hardware supplies</i>	1%	0%
	<i>Furniture, furnishings and decor</i>	0%	0%

<i>Retail trade sector</i>	<i>Category</i>	<i>Loss rate (incl. broken products but not products returned to manufacturer) during distribution (overall consolidated value for transportation, storage and retail place)</i>	<i>Loss rate at consumer (including restaurant, etc.)</i>
	<i>Electrical household appliances</i>	<i>1%</i>	<i>0%</i>
	<i>Kitchen merchandise</i>	<i>0%</i>	<i>0%</i>
	<i>Information and communication equipment</i>	<i>1%</i>	<i>0%</i>
	<i>Office machinery and supplies</i>	<i>1%</i>	<i>0%</i>
<i>Cultural and recreational goods</i>	<i>Books, newspapers and paper/paper supplies</i>	<i>1%</i>	<i>0%</i>
	<i>Music and videos</i>	<i>1%</i>	<i>0%</i>
	<i>Sporting equipment and gadgets</i>	<i>0%</i>	<i>0%</i>
	<i>Other cultural and recreational goods</i>	<i>1%</i>	<i>0%</i>
	<i>Healthcare</i>	<i>5%</i>	<i>5%</i>
	<i>Cleaning/hygiene products, cosmetics and toiletries</i>	<i>5%</i>	<i>5%</i>
	<i>Fuels, gases, lubricants and oils</i>	<i>1%</i>	<i>0%</i>
	<i>Batteries and power</i>	<i>0%</i>	<i>0%</i>

<i>Retail trade sector</i>	<i>Category</i>	<i>Loss rate (incl. broken products but not products returned to manufacturer) during distribution (overall consolidated value for transportation, storage and retail place)</i>	<i>Loss rate at consumer (including restaurant, etc.)</i>
<i>Plants and garden supplies</i>	<i>Flowers, plants and seeds</i>	<i>10%</i>	<i>0%</i>
	<i>Other garden supplies</i>	<i>1%</i>	<i>0%</i>
<i>Other goods</i>		<i>0%</i>	<i>0%</i>
<i>Gas station</i>	<i>Gas station products</i>	<i>1%</i>	<i>0%</i>

- 5512
- 5513 *Food losses at distribution center, during transport and at retail place, and at home: assumed to be 50%*
- 5514 *trashed (i.e., incinerated and landfilled), 25% composting, 25% methanisation.*
- 5515 *Product losses (excluding food losses) and packing/repacking/unpacking at distribution center, during*
- 5516 *transport and at retail place: Assumed to be 100% recycled.*
- 5517 *Other waste generated at distribution center, during transport and at retailer (outside food and product*
- 5518 *losses) such as repacking/unpacking are assumed to follow the same EoL treatment as for home waste.*
- 5519 *Liquid food wastes (as for instance milk) at consumer (including restaurant, etc.) are assumed to be poured*
- 5520 *in the sink and therefore treated in the wastewater treatment plant.*
- 5521
- 5522

# Annex H - When is carbon stored > 100 years?

5523

5524

5525

5526 When is carbon stored > 100 years and credits from biogenic carbon can be accounted for ? Principle:  
 5527 Carbon storage time starts from the moment carbon is taken up by the plant through photosynthesis and  
 5528 lasts till its release back into the atmosphere through e.g., degradation or incineration.

5529 If X kg CO<sub>2</sub> is stored over 100 years, a -X kg CO<sub>2</sub> equivalents (minus X) can be accounted for and is also  
 5530 called carbon credit. This -X kg CO<sub>2</sub> equivalents is modelled by including an emission uptake as 'resource  
 5531 from air' using the elementary flow 'carbon dioxide (biogenic-100yr)'.

5532

5533 Situation 1. At the forest system: carbon storage starts at uptake by the plant.

5534 **Figure 10: Three examples for better understanding of the forest system.**

5535

**A) Sustainable managed cork plantation of 150 years. Cork extraction every 10 years.**

5536


5537

5538

5539

5540

5541

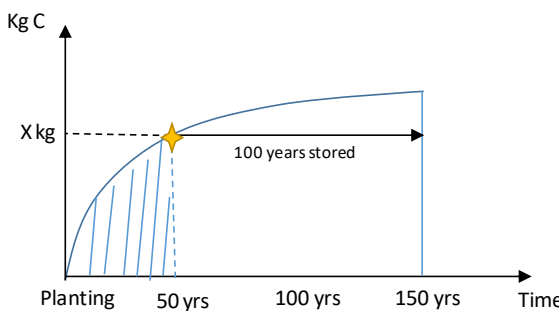

X kg C stored by the cork tree/by the system, over 100 years.

5542

5543

X kg C shall be allocated over all outputs of the total system (meaning, over 150 years)

5544

5545

5546


5547

5548

**B) Sustainable managed forest: Long-term rotation of 50 years**

*Sustainable managed reflects here in a stable carbon balance: C uptake = harvested C*


*Rotation time = carbon storage time = 50 years*

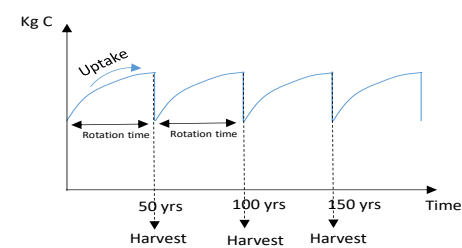

No carbon stored by the system over 100 years

The carbon storage time is co-determined by the product LT (see step 3)

**C) Sustainable managed forest: wood harvested after 100 years.**

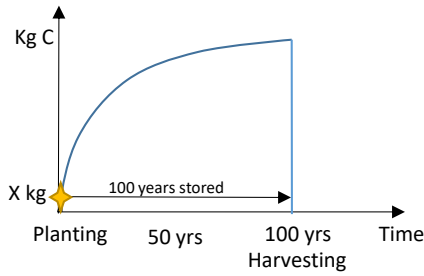

Only X kg C in the tree is stored over 100 years. X kg is the amount after one year growth.

**Legend:**

X-axes: timeline, starting the carbon uptake at year zero.

Y-axes: accumulative carbon uptake in the system

Yellow star: year where carbon has been stored for minimum 100 years, and reflecting on the Y-axes the amount of carbon to be accounted for as credit (named X kg)

5549  
5550  
5551  
5552  
5553  
5554

5555

5556 **Situation 2.** After the uptake in the forest system, the carbon storage continues in the final product.

5557 When the product lifetime (LT) is > 100 years: All carbon in the product is stored longer than 100 years: All  
5558 product carbon gets a -1 credit

5559 When the product LT is < 100 years: No carbon in the product is stored longer than 100 years: The carbon  
5560 storage time is co-determined by the storage time in the forest system (see situation 3)

5561


5562 **Situation 3.** Carbon is stored in the forest system and the final product: carbon storage time in forest and  
5563 carbon storage time in product determines if a carbon credit can be accounted for.

5564

5565 **Figure 11: Two examples for better understanding of carbon stored in forest system and final product.**

5566

**A) A forest plantation with harvested wood products after 150 years. The product LT is 50 years.**

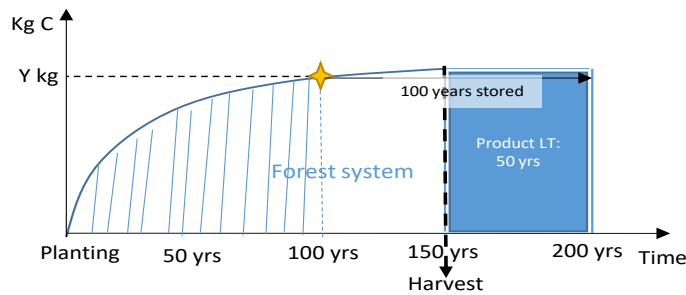


Y kg of carbon in the product is stored over 100 years (50yrs in the forest system + 50yrs in the product).

5567  
5568  
5569  
5570  
5571  
5572  
5573  
5574  
5575

5576  
5577  
5578  
5579  
5580  
5581  
5582  
5583  
5584  
5585

**B) A forest plantation with harvested product after 50 years. The product LT is 50 years.**

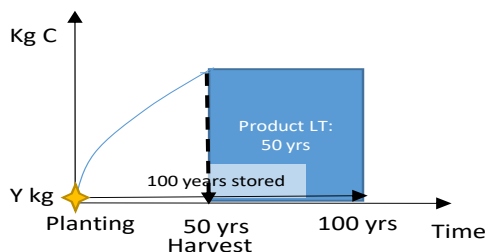

Only Y kg of carbon is stored over 100 years. Y kg is the amount after one year growth.

*Legend:*

*X-axes: timeline, starting the carbon uptake at year zero and ending when the product is degraded/incinerated/...*

*Y-axes: accumulative carbon uptake in the system + product*

*Yellow star: year where carbon has been stored for minimum 100 years, and reflecting on the Y-axes the amount of carbon to be accounted for as credit (named Y kg)*

## Annex I - EF-compliant dataset

5586  
5587  
5588  
5589  
5590  
5591  
5592  
5593  
5594  
5595  
5596

A basic requirement of the PEF and OEF methods is that LCI data used shall be compliant with the entry level (EL) requirements of the International Reference Life Cycle Data System (ILCD). Going beyond the ILCD EL requirements, the EF requirements provide further specifications to ILCD EL and refer to provisions e.g. in the Product Environmental Footprint (PEF) Guide (Rec 2013/179/EU - Annex II) or the Organisation Environmental Footprint (OEF) Guide (Rec 2013/179/EU - Annex III). In those cases the more specific (and sometimes more strict) EF requirements prevail over the ILCD EL requirements. Exceptions are allowed in case EF-compliant datasets are not available (see section 7.19.5).

The requirements listed in this Annex will be used for any future call for secondary datasets launched starting from 1<sup>st</sup> January 2018 and will be the basis for determining the EF-compliance of any LCI dataset starting from 1<sup>st</sup> January 2021.

### I.1 List of all technical requirements to be fulfilled by datasets to be recognised as EF compliant

#### I.1.1 Documentation

ILCD format shall be used. The developer kit is available at: <http://eplca.jrc.ec.europa.eu/LCDN/developer.xhtml>

5602 Furthermore, the requirement available at:  
5603 [http://eplca.jrc.ec.europa.eu/uploads/QMS\\_H08\\_ENSURE\\_ILCD\\_GuidanceDocumentationLCDDataSets\\_Ver](http://eplca.jrc.ec.europa.eu/uploads/QMS_H08_ENSURE_ILCD_GuidanceDocumentationLCDDataSets_Version1-1Beta_2011_ISBN_clean.pdf)  
5604 [sion1-1Beta\\_2011\\_ISBN\\_clean.pdf](http://eplca.jrc.ec.europa.eu/uploads/QMS_H08_ENSURE_ILCD_GuidanceDocumentationLCDDataSets_Version1-1Beta_2011_ISBN_clean.pdf) shall be fulfilled.

5605 The editor for datasets can be downloaded to: <http://eplca.jrc.ec.europa.eu/LCDN/developer.xhtml>

5606 In the same page other tools and documents for the creation, editing and compliance validation of datasets  
5607 are also available.

### 5608 **I.1.2 Nomenclature**

5609 Nomenclature shall be compliant with “ILCD Handbook – Nomenclature and other conventions” (including  
5610 elementary flows see link for Elementary Flow list available at:  
5611 <http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>).

5612 Details to fulfil this aspect are available at [http://eplca.jrc.ec.europa.eu/uploads/MANPROJ-PR-ILCD-](http://eplca.jrc.ec.europa.eu/uploads/MANPROJ-PR-ILCD-Handbook-Nomenclature-and-other-conventions-first-edition-ISBN-fin-v1.0-E.pdf)  
5613 [Handbook-Nomenclature-and-other-conventions-first-edition-ISBN-fin-v1.0-E.pdf](http://eplca.jrc.ec.europa.eu/uploads/MANPROJ-PR-ILCD-Handbook-Nomenclature-and-other-conventions-first-edition-ISBN-fin-v1.0-E.pdf)

5614 EF requirements allow some grouped flows (see the reference flow list available at  
5615 <http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>).

5616 As grouped flows like “AOX” or “heavy metals” are not preferable in the impact assessment phase, the EF  
5617 tries to avoid the use of such grouped flows and urges for further specification and the break-down of  
5618 grouped flows into their single components.

### 5619 **I.1.3 Review**

5620 The review report shall include at least:

- 5621 • File name and administrative information
  - 5622 ○ Data set name
  - 5623 ○ UUID (Universal Unique Identifier)
  - 5624 ○ Data set provider
  - 5625 ○ Reviewer name(s) and affiliation(s), contact
  - 5626 ○ Review type applied (see Table 37)
  - 5627 ○ Date of review completion (DD/MM/YYYY)
  - 5628 ○ EF compliance
- 5629 • Review reporting items for the criterion “nomenclature”
- 5630 • Review reporting items for the criterion “documentation”
- 5631 • Review reporting items for the criterion “Methodological appropriateness and consistency. In  
5632 particular, the reviewer shall check and report in the review report the % of impact covered for each  
5633 impact category in order to fulfil the completeness criterion. This check shall be based on expert  
5634 judgement and could be performed by comparing the coverage of flows existing in equivalent



- 5635 datasets available in other databases, or by referring to the elementary flows that contribute most to
- 5636 the JRC-provided normalisation data of the respective impact category.
- 5637 • Review reporting items for the criterion “Data quality”. The list of items checked and the procedure
  - 5638 used to check the data quality shall be included in the review report.
  - 5639 • Review for the Data Quality score, including a check of the results of the contribution analysis to
  - 5640 determine the scoring of each parameter in the DQR formula.

5641  
5642  
5643

**Table 37: Typology of reviews**

Typology and number of reviewers	Type 1	Panel of at least 3 independent reviewers, with at least one external
	Type 2	Two independent reviewers, with at least one external reviewer
	Type 3	Two independent internal reviewers
	Type 4	One independent external reviewer
	Type 5	One independent internal reviewer

5644  
5645

5646 **I.1.4 Methodological requirements**

5647 In order to be considered EF-compliant a dataset shall fulfil all the modelling requirements described in

5648 section 7 of this Guidance.

5649 Moreover, the following additional requirements shall also be fulfilled:

- 5650 • **Completeness:** all 16 EF impact categories shall be covered in the dataset. The reviewer shall check
- 5651 that for each impact category the most important elementary flows are included.
- 5652 • **Water use:** water use shall be modelled at country level using separate flows for water withdrawal,
- 5653 water release and water evaporation.
- 5654 • **Cut off:** processes can be excluded up to 1.0%, based on material and energy flow and the level of
- 5655 environmental significance, but it has to be clearly checked, documented (i.e. the processes subject to
- 5656 cut-off have to be made explicit in the documentation) and confirmed by the reviewer, in particular
- 5657 with reference to the environmental significance of the cut-off applied. A cut-off higher than 1.0% per
- 5658 process and higher than 5% cumulative is not allowed and the dataset is considered as not-compliant
- 5659 with EF requirements.
- 5660 • **Direct land use change:** Direct land use change shall be accounted for on the basis of a 20 year time
- 5661 period (starting from when the land use happened) and implemented in the calculation of 1) Climate
- 5662 Change according to the PAS2050-1:2012 method described at page 24 and 2) Land Use.
- 5663 • **Carbon storage and delayed emissions:** credits associated with temporary (carbon) storage or delayed
- 5664 emissions up to 100 years shall not be considered.
- 5665 • **Emissions off-setting:** not to be included

- 5666 • **Capital goods (including infrastructures) and their End of life:** they shall be included unless they can  
5667 be excluded based on the 1.0% cut-off rule. The eventual exclusion has to be clearly documented.
- 5668 • **System boundaries:** system boundaries shall include all processes linked to the product supply chain  
5669 (e.g. maintenance), unless they can be excluded based on the cut-off rule.
- 5670 • **Time period:** emissions and removals shall be modelled as if released or removed at the beginning of  
5671 the assessment period (no time discounting is allowed).
- 5672 • The **biogenic carbon content** at factory gate (physical content and allocated content) shall be reported.  
5673 If derived from native forest, it shall report that the corresponding carbon emissions shall be modelled  
5674 with the elementary flow '(land use change)'.
- 5675 • The **recycled content** ( $R_1$ ) shall be reported.
- 5676 • The LCIA shall be reported, specifying which version of the EF method has been used for the  
5677 assessment.
- 5678 • Calculation of Data Quality score.

## 5679 I.2 Aggregation

5680 An EF-compliant dataset should be available both as aggregated and disaggregated dataset (minimum at  
5681 level 1). The level 1 disaggregated dataset shall include, as a minimum, the following individual elements:

- 5682 • Sub-processes for energy input(s) (differentiated by energy carrier, including any potential energy  
5683 conversion of fuels and thus direct emissions, as “steam from [name of fuel]”, or “process heat from  
5684 [name of fuel]”). For each sub-process, the exact dataset (name and uuid) used in the aggregated  
5685 version of the dataset shall be indicated
- 5686 • Sub-processes in case system expansion is used as allocation: the datasets used for substitution. For  
5687 each sub-process, the exact dataset (name and uuid) used in the aggregated version of the dataset  
5688 shall always be indicated;
- 5689 • Sub-processes for each transport activity per input (material, ingredient, component, etc) entering  
5690 the gate of the process modelled<sup>106</sup>. For each sub-process, the exact dataset (name and uuid) used in  
5691 the aggregated version of the dataset shall always be indicated;
- 5692 • One aggregated sub-process for all the other processes that represent the background system  
5693 (blue box in Figure 12. The exact dataset (name and uuid) used in the aggregated version of the  
5694 dataset shall always be indicated).
- 5695 • The output product flow;
- 5696 • Elementary flows of direct emissions and resource outputs of the foreground system constituting  
5697 the final output product.
- 5698 • Elementary flows of direct resource inputs (e.g., land use, water use) of the foreground system  
5699 constituting the final output product.


5700

5701

---

<sup>106</sup> Some EF datasets tendered during the pilot phase might have one transport mode for all inputs summed together.

5702

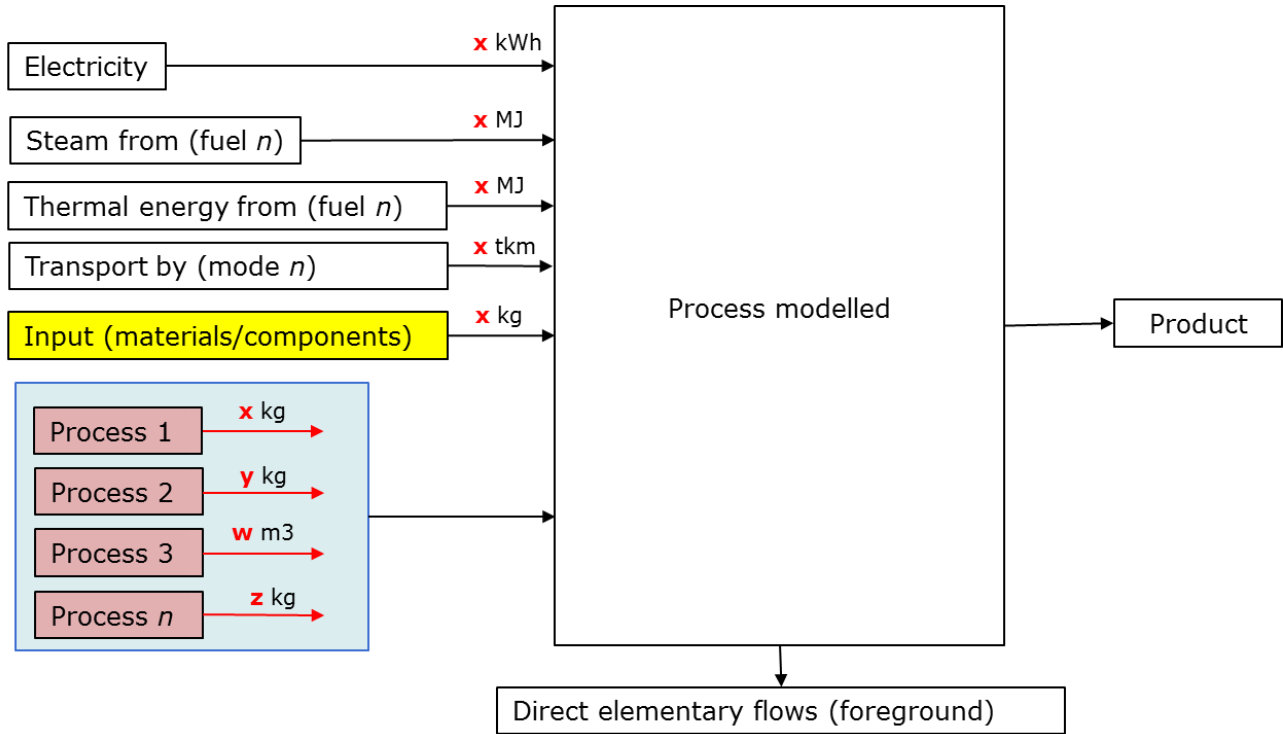

5703

5704 **Figure 12: Minimum level of disaggregation requested for a dataset aggregated at level 1. The yellow box is**  
 5705 **optional when going beyond the minimum requirements.**

5706

### 5707 **I.3 Data quality criteria and scores**

5708 The DQR of a dataset shall be calculated based on the equation J.1<sup>107</sup>:

5709

5710 
$$DQR = \frac{\overline{Te}_R + \overline{G}_R + \overline{Ti}_R + \overline{P}}{4}$$
 [Equation I.1]

5711

5712 Where  $Te_R$  is the Technical Representativeness,  $G_R$  is the Geographical Representativeness,  $Ti_R$  is the Time  
 5713 Representativeness and  $P$  is the Precision. The representativeness (technological, geographical and time-  
 5714 related) characterises to what degree the processes and products selected are depicting the system  
 5715 analysed, while the precision indicates the way the data is derived and related level of uncertainty.

5716

5717 The DQR shall be calculated before any aggregation of sub-processes or elementary flows is performed. In  
 particular, the procedure shall be applied before the creation of the aggregated sub-process of the level-1

<sup>107</sup> The EF datasets tendered during the pilot phase might apply a different approach, like expert judgement. The approach used is clarified in the respective dataset meta data information.

5718 disaggregated dataset (the "blue box" in Figure 12). For secondary datasets (e.g., developed by database  
5719 providers) the following procedure applies<sup>108</sup>:

5720 1) Select the most relevant sub-processes and direct (foreground) elementary flows that account for at  
5721 least 80% of the total environmental impact of the secondary dataset, listing them from the most  
5722 contributing to the least contributing one;

5723 2) Calculate the DQR criteria  $Te_R$ ,  $Ti_R$ ,  $G_R$  and  $P$  for each most relevant process and each most relevant direct  
5724 elementary flow. The values of each criterion shall be assigned based on Table 38.

5725 2.a) Each most relevant elementary flow consists of the amount and elementary flow naming (e.g. 40  
5726 g carbon dioxide). For each most relevant elementary flow, evaluate the 4 DQR criteria named  $Te_{R-EF}$ ,  
5727  $Ti_{R-EF}$ ,  $G_{R-EF}$ ,  $P_{EF}$ . For example, evaluate the timing of the flow measured, for which technology the  
5728 flow was measured and in which geographical area.

5729 2.b) Each most relevant process is a combination of activity data and the secondary dataset used. For  
5730 each most relevant process, the 4 DQR criteria are calculated as follow: (i)  $Ti_R$  and  $P$  shall be  
5731 evaluated at the level of the activity data (named  $Ti_{R-AD}$ ,  $P_{AD}$ ), while (ii)  $Te_R$ ,  $Ti_R$  and  $G_R$  shall be  
5732 evaluated at the level of the secondary dataset used (named  $Te_{R-SD}$ ,  $Ti_{R-AD}$  and  $G_{R-SD}$ ). As  $Ti_R$  is  
5733 evaluated twice, the mathematical average of the activity data and secondary dataset represents the  
5734  $Ti_R$  of the most relevant process.

5735 3) Calculate the environmental contribution of each most-relevant process and elementary flow to the  
5736 total environmental impact of all most-relevant processes and elementary flows, in % (weighted using 13  
5737 EF impact categories, with the exclusion of the 3 toxicity-related ones). For example, the newly developed  
5738 dataset has only two most relevant processes, contributing in total to 80% of the total environmental  
5739 impact of the dataset:

5740 1 Process 1 carries 30% of the total dataset environmental impact. The contribution of this process to  
5741 the total of 80% is 37.5% (the latter is the weight to be used).

5742 2 Process 1 carries 50% of the total dataset environmental impact. The contribution of this process to  
5743 the total of 80% is 62.5% (the latter is the weight to be used).

5744 4) Calculate separately the  $Te_R$ ,  $Ti_R$ ,  $G_R$  and  $P$  for the secondary dataset as the weighted average of each  
5745 criteria of the most relevant sub-processes and most relevant direct elementary flows. The weight is the  
5746 relative contribution (in %) of each most relevant process and direct elementary flow calculated in step 3.

5747 5) Calculate the total DQR of the secondary dataset using equation I.1, where  $\overline{Te_R}$ ,  $\overline{G_R}$ ,  $\overline{Tl_R}$ ,  $\overline{P}$  are the  
5748 weighted averages calculated as specified in point 4. In order to be EF-compliant, each single criteria in  
5749 cannot be higher than 3.0.

5750

---

<sup>108</sup> For datasets based on company-specific data the procedure described in section 7.19.4.37.19.4.3 applies.

5751 **Table 38: Quality rating for the data quality criteria**

Quality rating	P <sub>EF</sub> and P <sub>AD</sub>	T <sub>iR-EF</sub> and T <sub>iR-AD</sub>	T <sub>iR-SD</sub>	T <sub>eR-EF</sub> and T <sub>eR-SD</sub>	G <sub>R-EF</sub> and G <sub>R-SD</sub>
1	Measured/calculated and verified	The data (collection date) can be maximum 2 years old with respect to the "reference year" of the dataset.	The "reference year" of the tendered dataset falls within the time validity of the secondary dataset	Technology aspects have been modelled exactly as described in the title and metadata, without any significant need for improvement	The processes included in the dataset are fully representative for the geography stated in the "location" indicated in the metadata
2	Measured/calculated/literature and plausibility checked by reviewer	The data (collection date) can be maximum 4 years old with respect to the "reference year" of the dataset.	The "reference year" of the tendered dataset is maximum 2 years beyond the time validity of the secondary dataset	Technology aspects are very similar to what described in the title and metadata with need for limited improvements. For example: use of generic technologies' data instead of modelling all the single plants.	The processes included in the dataset are well representative for the geography stated in the "location" indicated in the metadata
3	Measured/calculated/literature and plausibility not checked by reviewer OR Qualified estimate based on calculations plausibility checked by reviewer	The data (collection date) can be maximum 6 years old with respect to the "reference year" of the dataset.	The "reference year" of the tendered dataset is maximum 3 years beyond the time validity of the secondary dataset	Technology aspects are similar to what described in the title and metadata but merits improvements. Some of the relevant processes are not modelled with specific data but using proxies.	The processes included in the dataset are sufficiently representative for the geography stated in the "location" indicated in the metadata. E.g. the represented country differs but has a very similar electricity grid mix profile,
4	Qualified estimate based on calculations, plausibility not checked by reviewer	The data (collection date) can be maximum 8 years old with respect to the "reference year" of the dataset.	The "reference year" of the tendered dataset is maximum 4 years beyond the time validity of the secondary dataset	Technology aspects are different from what described in the title and metadata. Requires major improvements.	The processes included in the dataset are only partly representative for the geography stated in the "location" indicated in the metadata. E.g. the represented country differs and has a substantially different electricity grid mix profile
5	Rough estimate with known deficits	The data (collection date) is older than 8 years with respect to the "reference year" of the dataset.	The "reference year" of the tendered dataset is more than 4 years beyond the time validity of the secondary dataset	Technology aspects are completely different from what described in the title and metadata. Substantial improvement is necessary	The processes included in the dataset are not representative for the geography stated in the "location" indicated in the metadata.

5752 T<sub>iR-EF</sub>: time representativeness for the elementary flow  
 5753 T<sub>iR-AD</sub>: time representativeness for the activity data  
 5754 T<sub>iR-SD</sub>: time representativeness for the secondary dataset  
 5755

5756 **How to report the DQR for the datasets:** The dataset shall state as meta-data one numerical value for each  
5757 DQR criteria (namely  $\overline{T e_R}$ ;  $\overline{G_R}$ ;  $\overline{T l_R}$ ;  $\overline{P}$ ) and the total DQR numerical value, always referred to the dataset.